Roof Report

Prepared by Roofr

9310 Cowpath Road, Saint Paris, OH 43072
Mark Crockett


10926 sqft
28 facets
Predominant pitch 8/12




This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

9310 Cowpath Road, Saint Paris, OH 43072

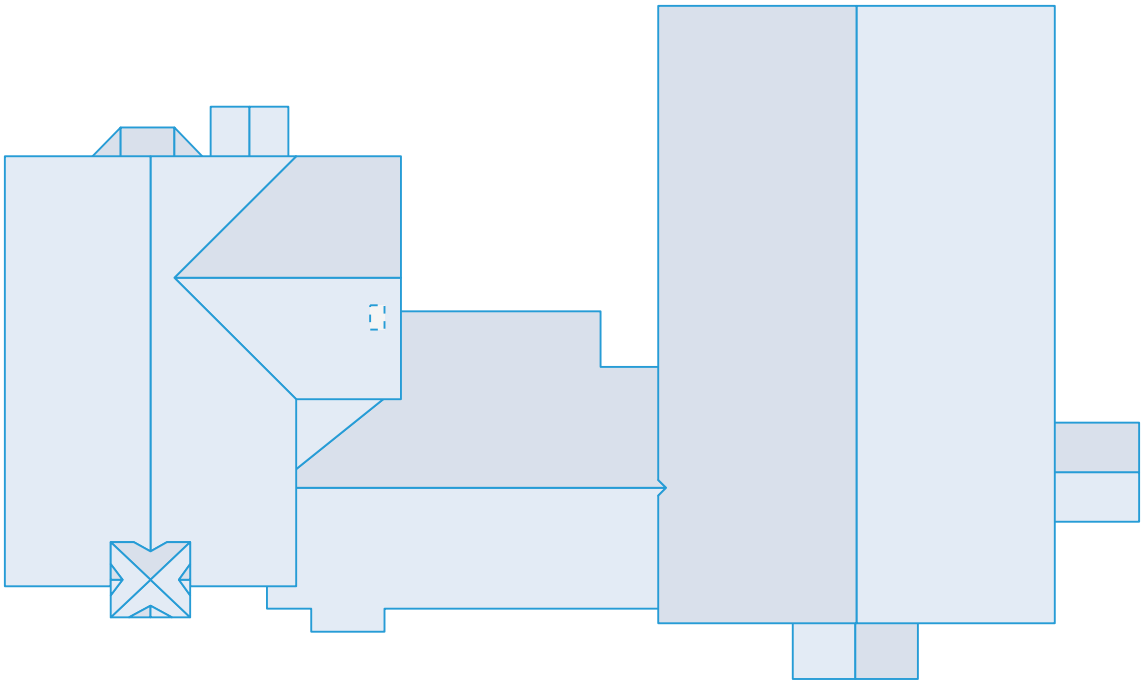




This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

9310 Cowpath Road, Saint Paris, OH 43072

- Eaves: 448ft 0in
- Ridges: 242ft 0in
- Step flashing: 141ft 0in
- Unspecified: 7ft 10in
- Valleys: 105ft 8in
- Rakes: 346ft 4in
- Transitions: 0ft 0in
- Hips: 56ft 4in
- Wall flashing: 37ft 1in
- Parapet wall: 0ft 0in

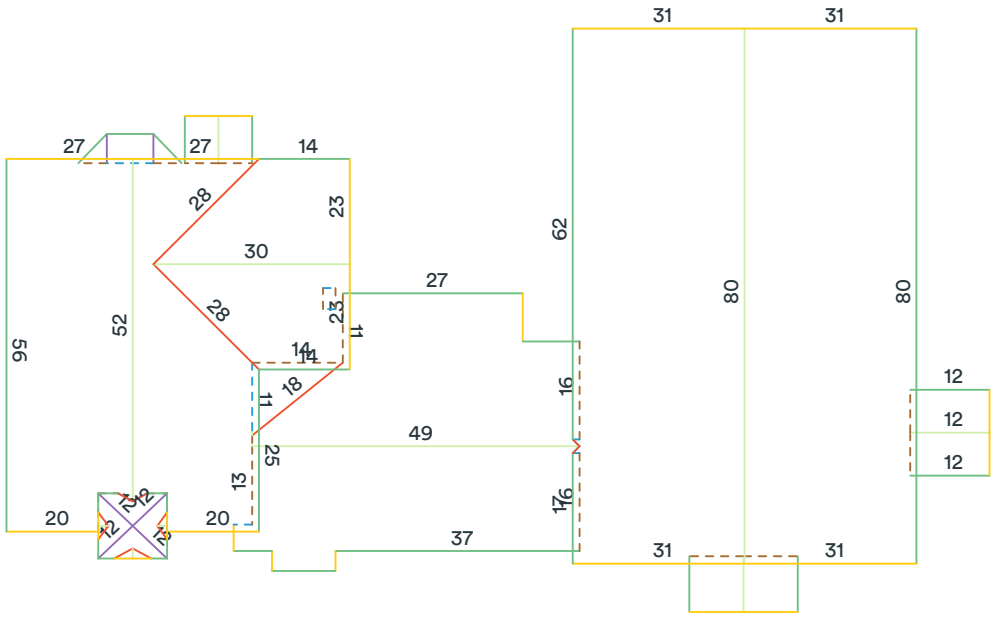

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

9310 Cowpath Road, Saint Paris, OH 43072

Total roof area: 10926 sqft
Pitched roof area: 10926 sqft
Flat roof area: 0 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 8/12
Predominant pitch area: 5429 sqft
Unspecified pitch area: 0 sqft

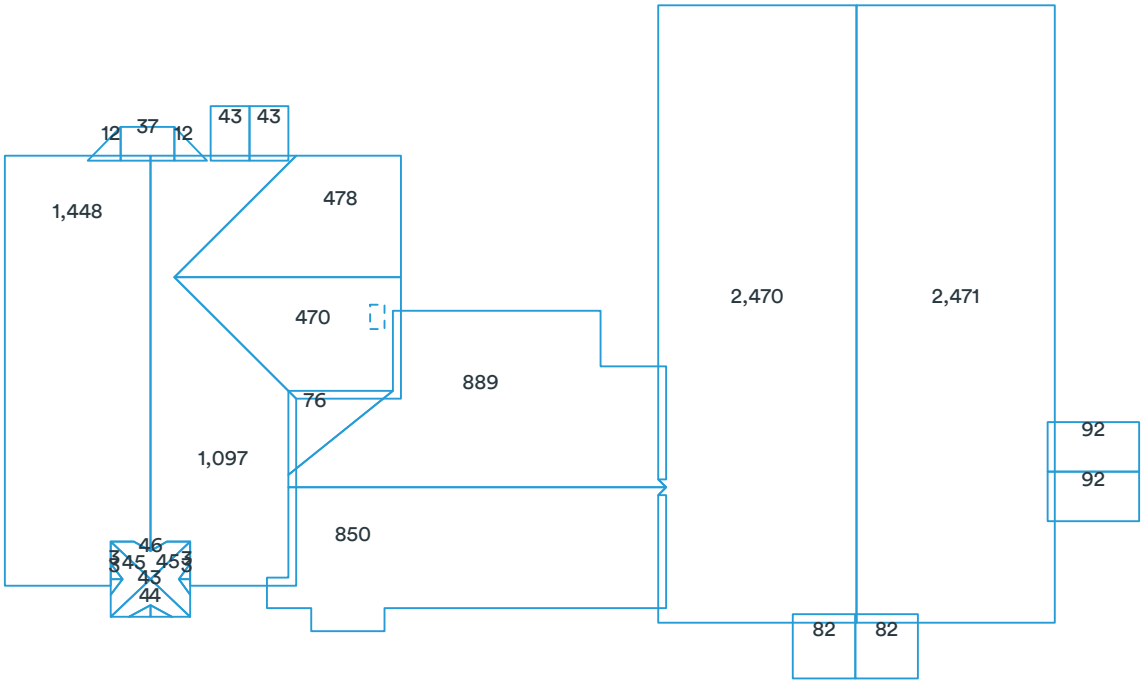




Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

9310 Cowpath Road, Saint Paris, OH 43072

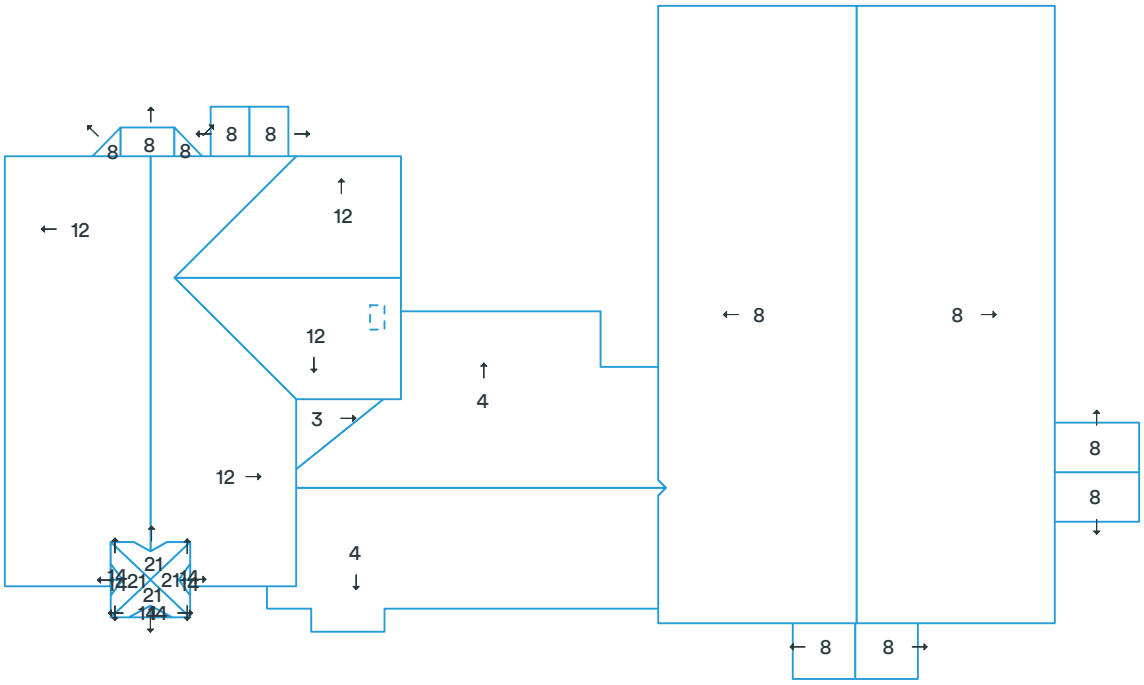




Deleted facets are designated with a dashed line and do not have a pitch.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

9310 Cowpath Road, Saint Paris, OH 43072

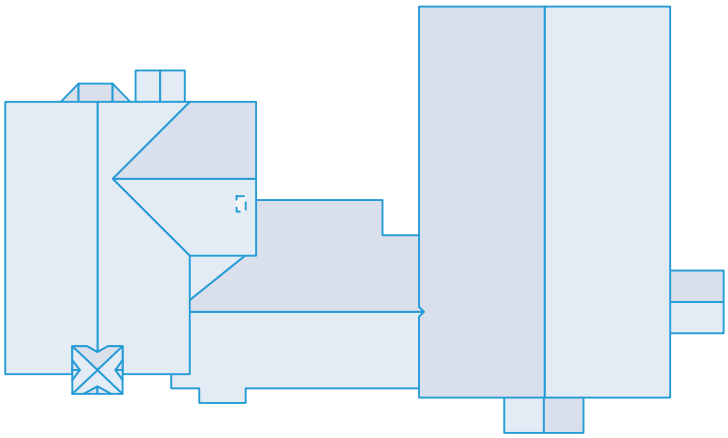

Measurements

Total roof area	10926 sqft
Total pitched area	10926 sqft
Total flat area	0 sqft
Total roof facets	28 facets
Predominant pitch	8/12
Total eaves	448ft 0in
Total valleys	105ft 8in
Total hips	56ft 4in
Total ridges	242ft 0in
Total rakes	346ft 4in
Total wall flashing	37ft 1in
Total step flashing	141ft 0in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	7ft 10in
Hips + ridges	298ft 4in
Eaves + rakes	794ft 3in

Pitch	3/12	4/12	8/12	12/12	14/12	21/12
Area (sqft)	76	1,738	5,429	3,492	16	177
Squares	0.8	17.4	54.3	35.0	0.2	1.8

Recommended

Waste %	0%	8%	10%	12%	15%	17%	20%
Area (sqft)	10,926	11,801	12,019	12,238	12,565	12,784	13,112
Squares	109.3	118.1	120.2	122.4	125.7	127.9	131.2

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

9310 Cowpath Road, Saint Paris, OH 43072

Product	Unit	Waste (0%)	Waste (8%)	Waste (10%)	Waste (15%)
Shingle (total sqft)		10,926 sqft	11,801 sqft	12,019 sqft	12,565 sqft
IKO - Cambridge	bundle	329	355	361	378
CertainTeed - Landmark	bundle	334	360	367	384
GAF - Timberline	bundle	334	360	367	384
Owens Corning - Duration	bundle	334	360	367	384
Atlas - Pristine	bundle	332	358	365	381
Starter (eaves + rakes)		795 ft	858 ft	874 ft	914 ft
IKO - Leading Edge Plus	bundle	7	8	8	8
CertainTeed - SwiftStart	bundle	7	8	8	8
GAF - Pro-Start	bundle	7	8	8	8
Owens Corning - Starter Strip	bundle	8	9	9	9
Atlas - Pro-Cut	bundle	6	7	7	7
Ice and Water (eaves + valleys + flashings)		732 ft	791 ft	805 ft	842 ft
IKO - StormShield	roll	12	13	13	13
CertainTeed - WinterGuard	roll	12	13	13	13
GAF - WeatherWatch	roll	11	12	13	13
Owens Corning - WeatherLock	roll	10	11	11	12
Atlas - Weathermaster	roll	12	13	13	13
Synthetic (total sqft; no laps)		10,926 sqft	11,801 sqft	12,019 sqft	12,565 sqft
IKO - Stormtite	roll	11	12	13	13
CertainTeed - RoofRunner	roll	11	12	13	13
GAF - Deck-Armor	roll	11	12	13	13
Owens Corning - RhinoRoof	roll	11	12	13	13
Atlas - Summit	roll	11	12	13	13
Capping (hips + ridges)		299 ft	323 ft	329 ft	344 ft
IKO - Hip and Ridge	bundle	8	9	9	9
CertainTeed - Shadow Ridge	bundle	10	11	11	12
GAF - Seal-A-Ridge	bundle	12	13	14	14
Owens Corning - DecoRidge	bundle	15	17	17	18
Atlas - Pro-Cut H&R	bundle	10	11	11	12
Other					
8' Valley (no laps)	sheet	14	15	15	16
10' Drip Edge (eaves + rakes; no laps)	sheet	80	86	88	92

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.