
Insulation


A ready reference guide for ordering insulation for your next job.

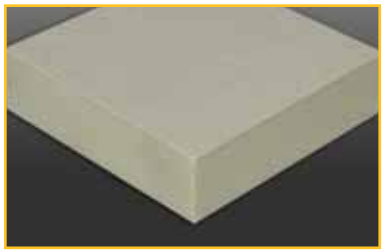

SecurShield™

A rigid roof insulation panel composed of a closed-cell polyisocyanurate foam core bonded to high performance coated glass facers. The premium facer provides improved fire and moisture resistance, enhanced wind uplift performance and improved dimensional stability. Ideal for use in fully adhered systems and achieves a UL Class A fire rating at 3" on combustible decks.


Sizes: 4' x 4' and 4' x 8'
Thickness: 1" to 4 ½"
Compressive Strength: 20 and 25psi

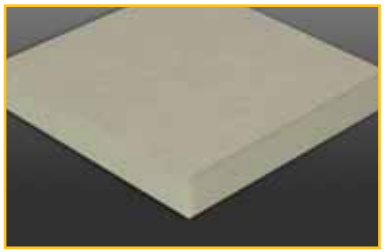

SecurShield CD

A rigid roof insulation panel composed of a closed-cell polyisocyanurate foam core bonded to enhanced high performance coated glass facers providing a UL Class A fire rating at only 1" on combustible decks.


Sizes: 4' x 4' and 4' x 8'
Thickness: 1"
Compressive Strength: 20 and 25psi

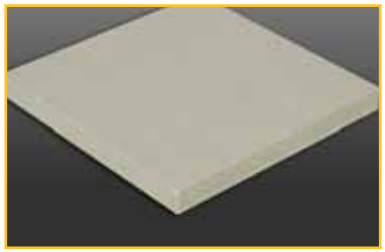

SecurShield HD

A rigid roof insulation panel composed of ½" high-density, closed-cell polyisocyanurate foam core bonded to a premium performance coated glass facer specifically designed for use as a cover board. Provides 5 times the R-value at 5 times less weight than traditional gypsum cover boards.

Sizes: 4' x 8'
Thickness: ½"
Compressive Strength: 100psi

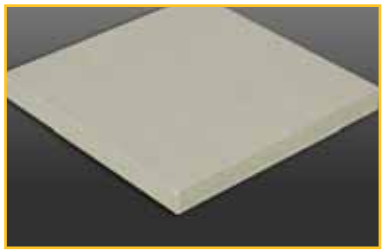

SecurShield HD Plus

Reduced fastening pattern for FM 1-90 wind uplift with only 8 fasteners per board. A rigid roof insulation panel composed of ½" high-density, closed-cell polyisocyanurate foam core bonded to a premium performance coated glass facer specifically designed for use as a cover board. Provides 5 times the R-value at 5 times less weight than traditional gypsum cover boards.


Sizes: 4' x 8'
Thickness: ½"
Compressive Strength: >100psi



SecurShield HD Composite

A unique composite insulation panel comprised of ½" high-density 100psi polyiso cover board bonded during the manufacturing process to SecurShield rigid Polyiso roof insulation. Eliminates the need for cover boards, reduces inter-ply adhesives and saves labor on the roof. Achieves a UL Class A fire rating at 2" on combustible decks.

Sizes: 4' x 4' and 4' x 8'
Thickness: 2" to 4 ½"
Compressive Strength: 20 or 25psi (SecurShield) and 100psi (Securshield HD)

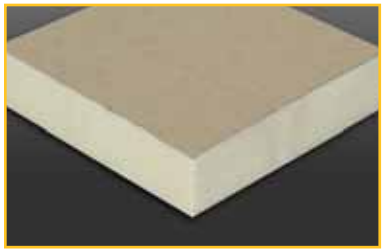

MP-H Polyiso

A rigid roof insulation panel composed of closed-cell polyisocyanurate foam core bonded to fiber-reinforced facers. Approved by UL and FM for direct application over steel decks, polyiso provides the highest R-value per inch of any commercially available insulation product.


Sizes: 4' x 4' and 4' x 8'
Thickness: 1" to 4 ½"
Compressive Strength: 20 and 25psi



MP-HNB Polyiso

A rigid roof insulation composite panel composed of closed-cell polyisocyanurate foam core bonded to a fiber-reinforced facer on one side and either 7/16" or 5/8" oriented strand board (OSB) on the other. 5/8" and 3/4" plywood, as well as FSC Certified OSB and plywood options are also available.

Sizes: 4' x 8'
Thickness: 1" to 4 ½"

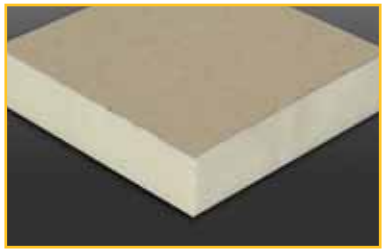

Tapered Polyiso

A sloped rigid roof insulation panel composed of closed cell polyisocyanurate foam core bonded to either high performance coated glass or fiber-reinforced facers. Designed to promote positive drainage and prevent ponding water with design assistance available through Versico's Tapered Design Team.


Sizes: 4' x 4' and 4' x 8'
Thickness: ½" to 4 ½"
(multiple layers utilized for increased thicknesses)
Compressive Strength: 20 and 25psi



Hinged Target Sumps

For tapered polyiso systems. Ships ready to install and saves valuable time on the roof. Concentric circles simplify drain cutout. Multiple thicknesses and slopes available to accommodate specific job conditions with no waste, thus reducing disposal fees.

Sizes: 8' x 8' (ships folded in half, 4' x 4')
Thickness and Starts: As required by job
Compressive Strength: 20 and 25psi



Pre-Cut Hips and Valleys

For tapered polyiso systems. Ships ready to install, requires no field cuts and saves valuable time on the roof. Custom-designed to meet your jobsite requirements including slope and thickness with no waste, thus reducing disposal fees.

Sizes: 4' x 4'
Thickness and Slope: As required by job
Compressive Strength: 20 and 25psi

VERSICO
ROOFING SYSTEMS

A SINGLE SOURCE FOR SINGLE-PLY ROOFING

Versico, PO Box 1289, Carlisle, PA 17013
Tel: **800.992.7663** Fax: 717.960.4036 Web: **www.versico.com**

© 2014 Versico. 08.07.14

Versico and the Versico logo are trademarks of Versico.