
INSULTITE INSULATION FASTENERS

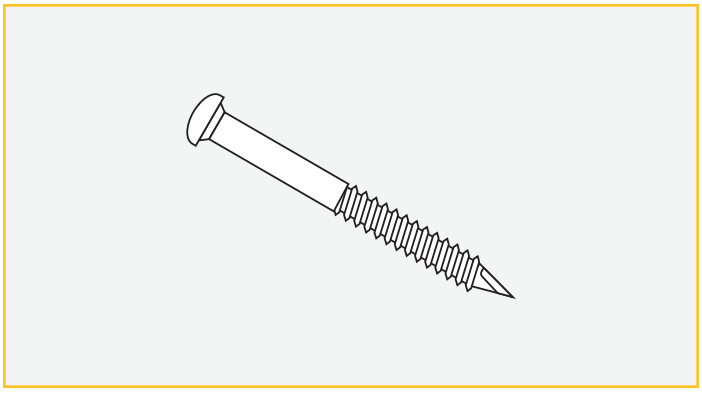

Overview

Versico Insultite Fasteners are used in conjunction with Versico 3" Insulation Plates for insulation attachment on VersiGard® EPDM, VersiGard White EPDM and VersiWeld® TPO mechanically attached and fully adhered roofing systems.

Features and Benefits

- Fastener incorporates a #3 Phillips drive.
- The coating used on the fastener provides excellent corrosion resistance, surpassing the FM 4470 requirements of less than 15% red rust after 15 cycles in Kesternich cabinet.
- One Phillips driver bit is included in each box of fasteners.

Installation

Place Insultite Fasteners and Versico Insulation Plate at the desired location and install with a standard clutch drive screw gun. No pre=drilling is necessary for wood and steel (18 GA or less) decks as the fastener is self-drilling. The minimum penetration depth (measured from the top surface) is 1" (25 mm) for wood and ¾" (19 mm) for steel.

REVIEW CURRENT VERSICO SPECIFICATIONS AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

Precautions

1. Eye protection is recommended during installation.
2. Use care to avoid over-torqueing the fastener. Fastener must be tight enough to keep the plate from turning.

TYPICAL PROPERTIES AND CHARACTERISTICS

Size Inch	Weight/Ctn	Packaging Fasteners/Ctn
1 ⅝	12 lbs	1,000
2 ¼	16 lbs	1,000
3	22 lbs	1,000
4	29 lbs	1,000
5	35 lbs	1,000
6	42 lbs	1,000
7	48 lbs	1,000
8	55 lbs	1,000

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.

VERSICO ROOFING SYSTEMS

A SINGLE SOURCE FOR SINGLE-PLY ROOFING

Versico, PO Box 1289, Carlisle, PA 17013
Tel: **800.992.7663** Fax: 717.960.4036 Web: **www.versico.com**

© 2013 Versico. 09.13.13

Versico, VersiGard, VersiWeld and the Versico logo are trademarks of Versico.