
Roof Report

Prepared by Rich Roofing & Services LLC

424 Pinewood Avenue, Piqua, OH 45356
Heather Foster

2232 sqft
6 facets
Predominant pitch 0/12

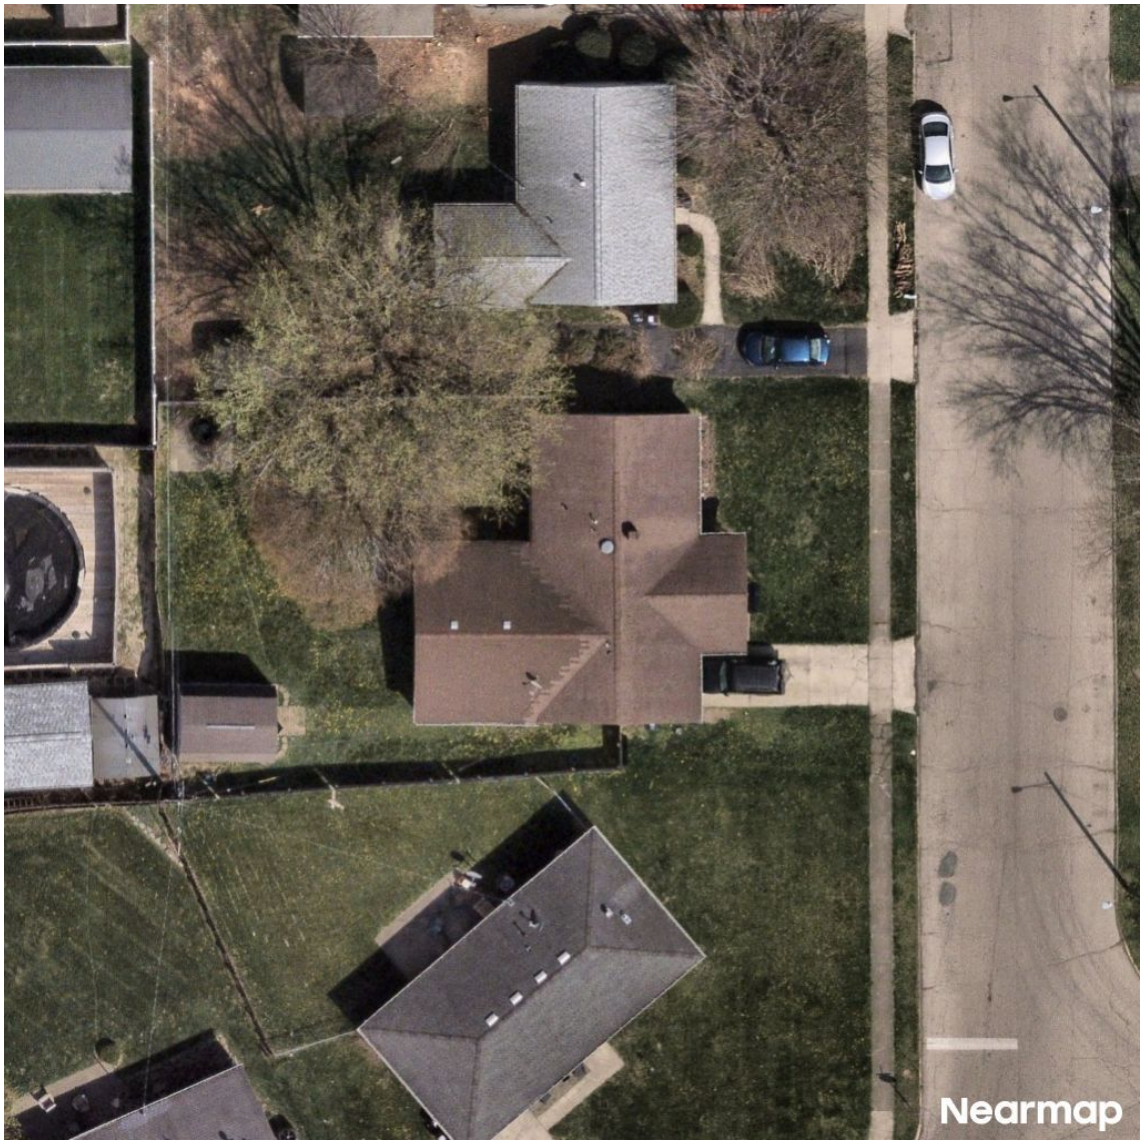


Nearmap Mar 24, 2026

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

424 Pinewood Avenue, Piqua, OH 45356

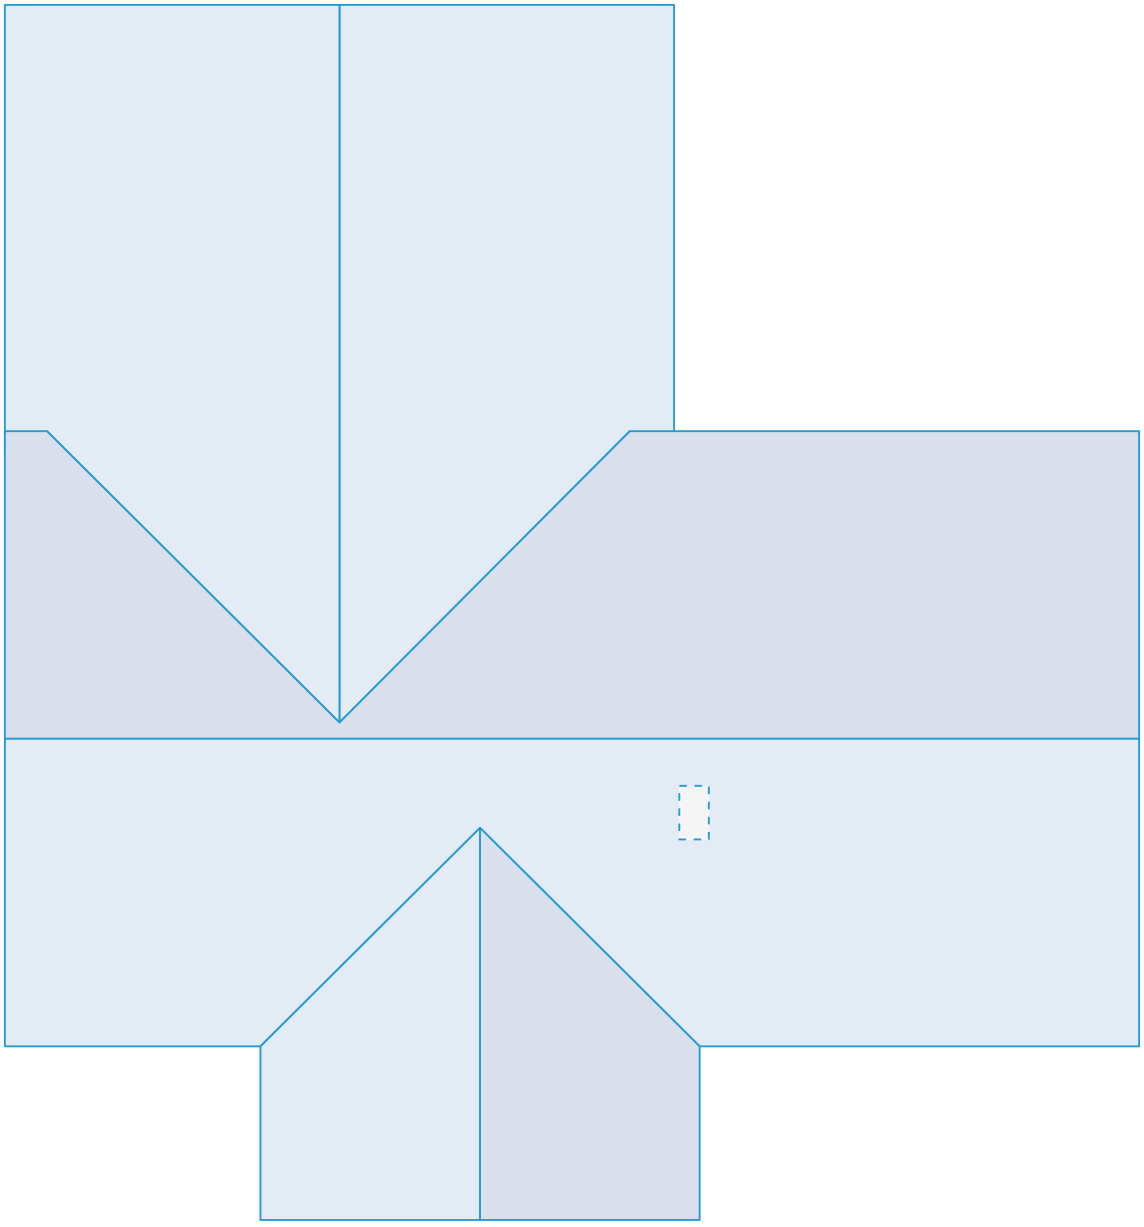


This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

424 Pinewood Avenue, Piqua, OH 45356

- Eaves: 114ft 4in
- Ridges: 103ft 0in
- Step flashing: 8ft 11in
- Unspecified: 37ft 10in
- Valleys: 66ft 3in
- Rakes: 107ft 4in
- Transitions: 0ft 0in
- Hips: 0ft 0in
- Wall flashing: 4ft 9in
- Parapet wall: 0ft 0in

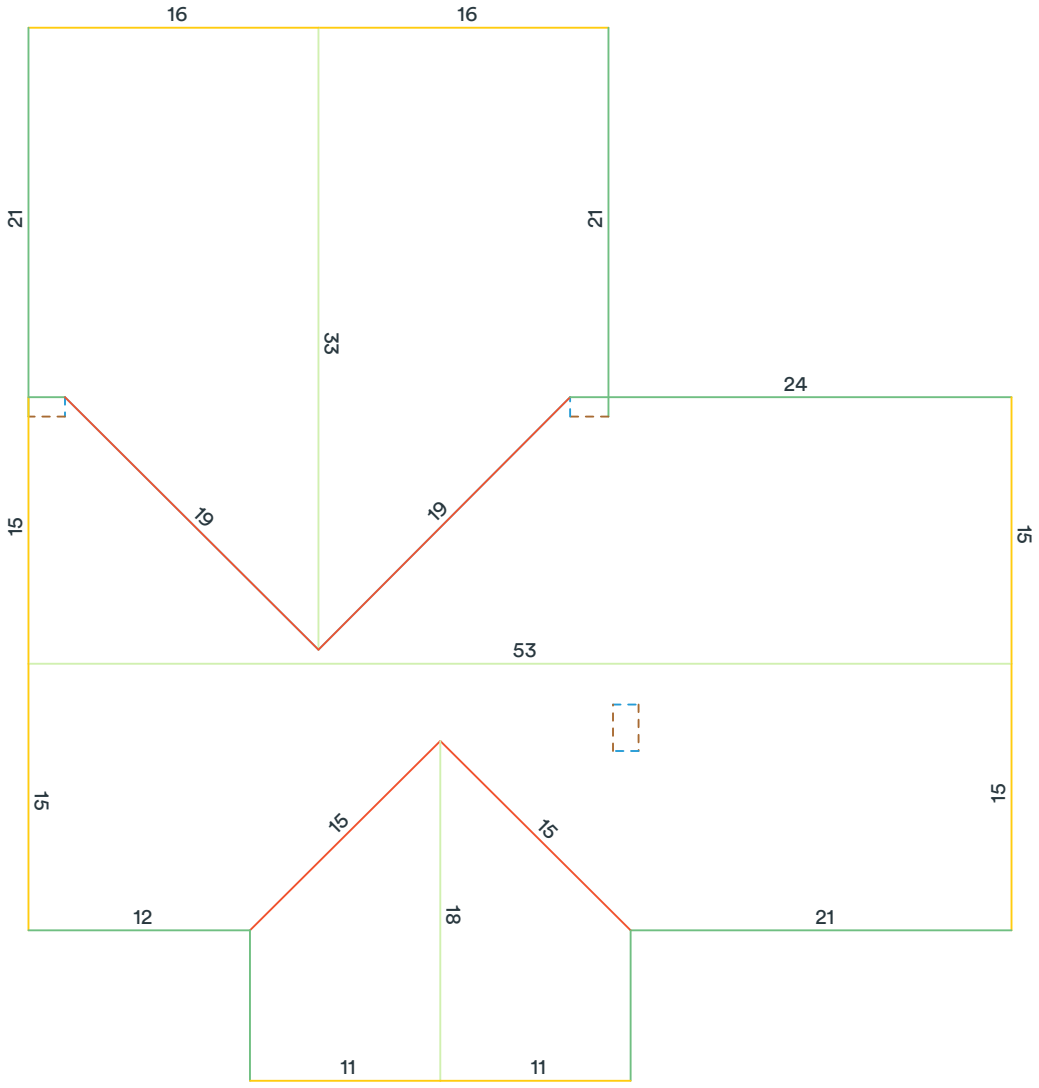

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

424 Pinewood Avenue, Piqua, OH 45356

Total roof area: 2232 sqft
Pitched roof area: 2232 sqft
Flat roof area: 0 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 0/12
Predominant pitch area: 0 sqft
Unspecified pitch area: 2232 sqft

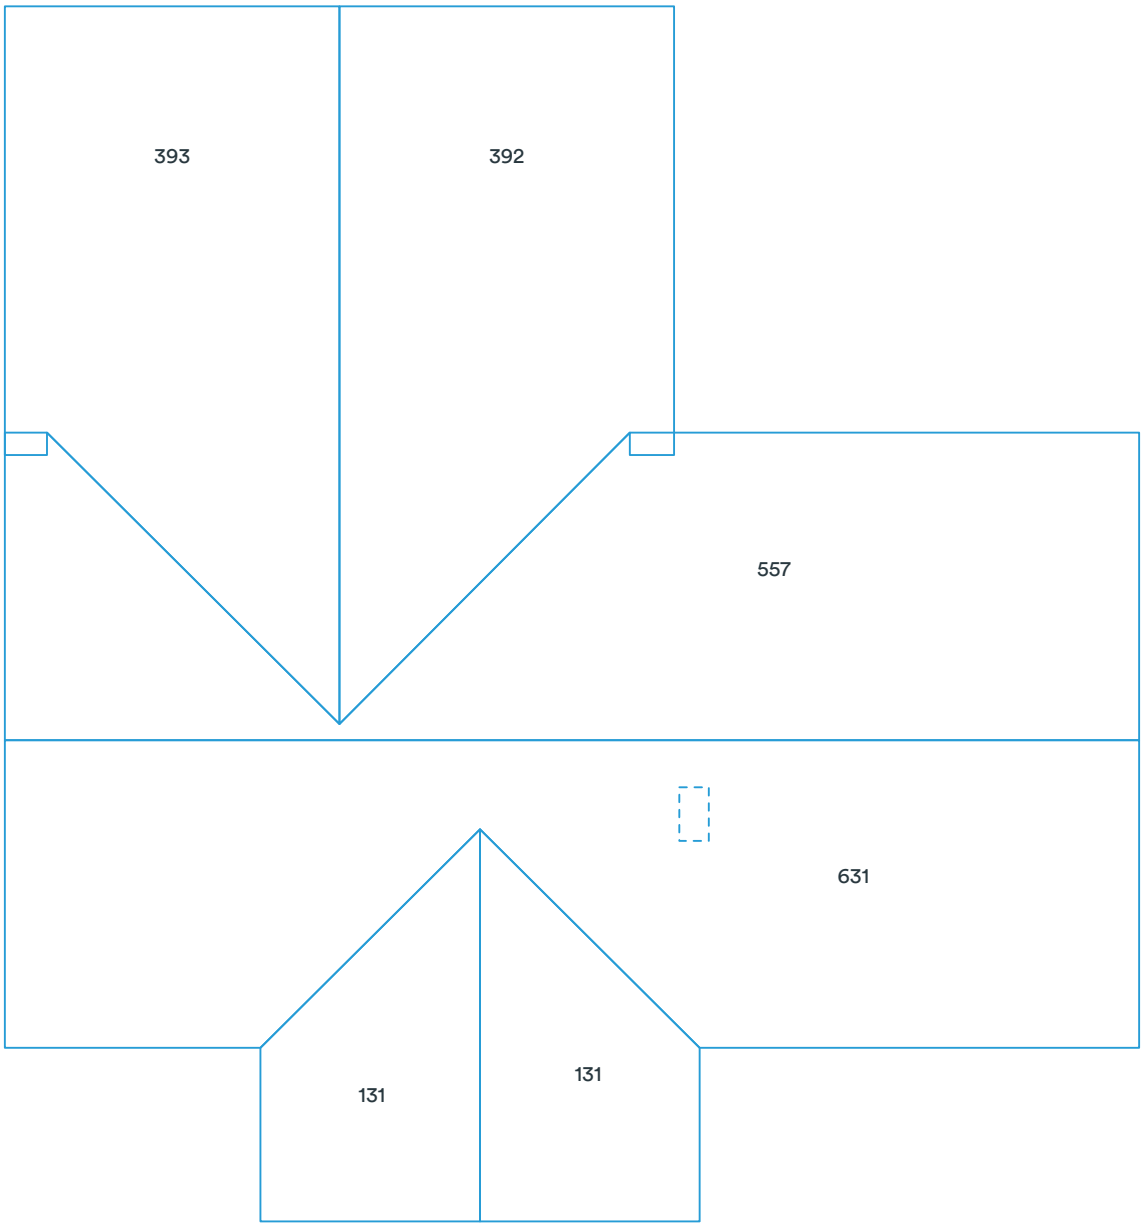


Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

424 Pinewood Avenue, Piqua, OH 45356

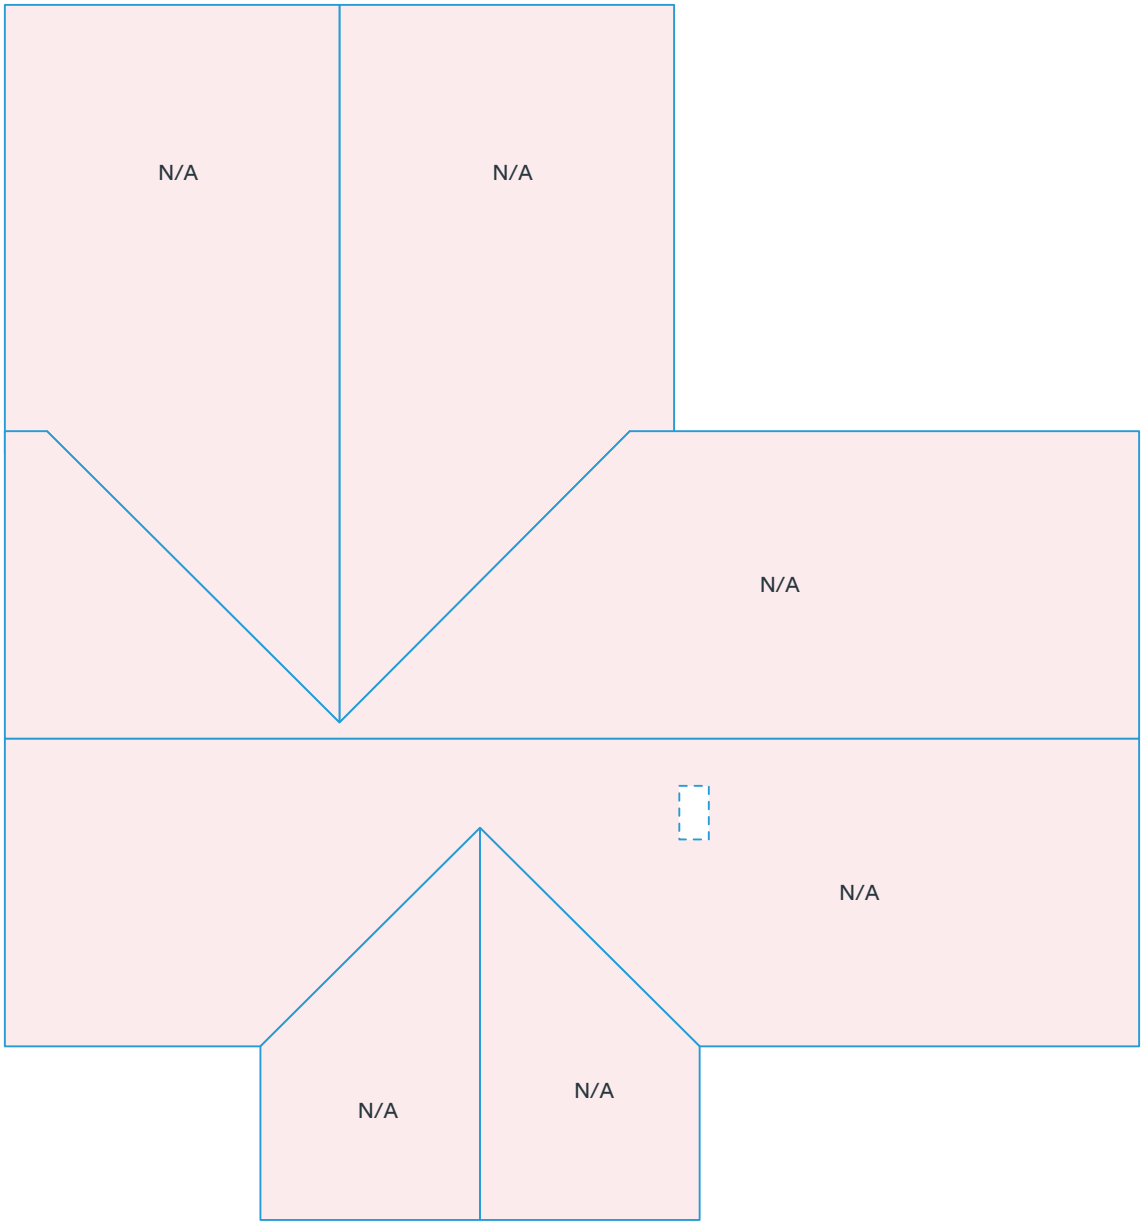




Deleted facets are designated with a dashed line and do not have a pitch.

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

424 Pinewood Avenue, Piqua, OH 45356

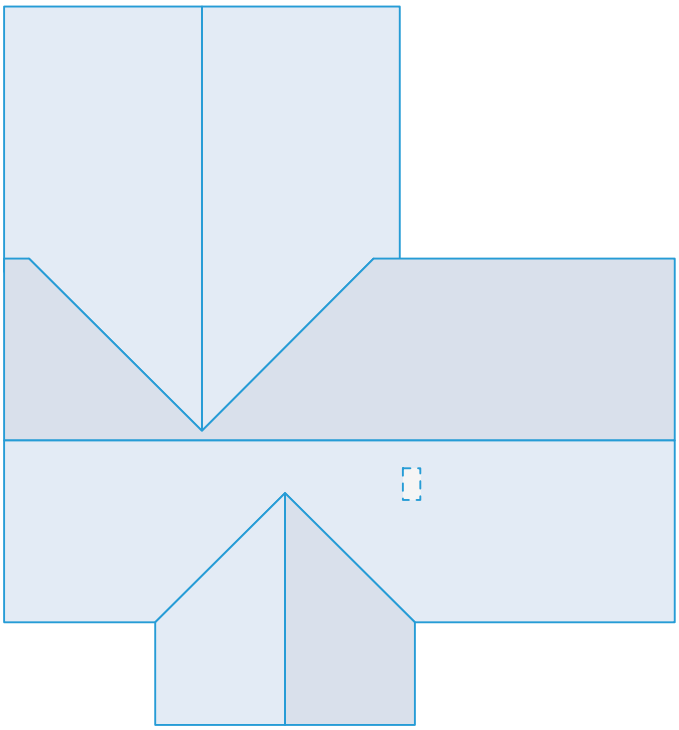

Measurements

Total roof area	2232 sqft
Total pitched area	2232 sqft
Total flat area	0 sqft
Total roof facets	6 facets
Predominant pitch	0/12
Total eaves	114ft 4in
Total valleys	66ft 3in
Total hips	0ft 0in
Total ridges	103ft 0in
Total rakes	107ft 4in
Total wall flashing	4ft 9in
Total step flashing	8ft 11in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	37ft 10in
Hips + ridges	103ft 0in
Eaves + rakes	221ft 8in

Pitch	N/A
Area (sqft)	2,233
Squares	22.4

			Recommended				
Waste %	0%	10%	11%	12%	15%	17%	20%
Area (sqft)	2,233	2,456	2,478	2,500	2,567	2,612	2,679
Squares	22.4	24.6	24.8	25.0	25.7	26.2	26.8

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

424 Pinewood Avenue, Piqua, OH 45356

Product	Unit	Waste (0%)	Waste (10%)	Waste (11%)	Waste (15%)
Shingle (total sqft)		2,233 sqft	2,456 sqft	2,478 sqft	2,567 sqft
IKO - Cambridge	bundle	68	74	75	78
CertainTeed - Landmark	bundle	69	75	76	79
GAF - Timberline	bundle	69	75	76	79
Owens Corning - Duration	bundle	69	75	76	79
Atlas - Pristine	bundle	68	75	76	78
Starter (eaves + rakes)		222 ft	244 ft	247 ft	255 ft
IKO - Leading Edge Plus	bundle	2	3	3	3
CertainTeed - SwiftStart	bundle	2	3	3	3
GAF - Pro-Start	bundle	2	3	3	3
Owens Corning - Starter Strip	bundle	3	3	3	3
Atlas - Pro-Cut	bundle	2	2	2	2
Ice and Water (eaves + valleys + flashings)		195 ft	214 ft	216 ft	224 ft
IKO - StormShield	roll	3	4	4	4
CertainTeed - WinterGuard	roll	3	4	4	4
GAF - WeatherWatch	roll	3	4	4	4
Owens Corning - WeatherLock	roll	3	3	3	3
Atlas - Weathermaster	roll	3	4	4	4
Synthetic (total sqft; no laps)		2,233 sqft	2,456 sqft	2,478 sqft	2,567 sqft
IKO - Stormtite	roll	3	3	3	3
CertainTeed - RoofRunner	roll	3	3	3	3
GAF - Deck-Armor	roll	3	3	3	3
Owens Corning - RhinoRoof	roll	3	3	3	3
Atlas - Summit	roll	3	3	3	3
Capping (hips + ridges)		103 ft	114 ft	115 ft	119 ft
IKO - Hip and Ridge	bundle	3	3	3	4
CertainTeed - Shadow Ridge	bundle	4	4	4	4
GAF - Seal-A-Ridge	bundle	5	5	5	5
Owens Corning - DecoRidge	bundle	6	6	6	6
Atlas - Pro-Cut H&R	bundle	4	4	4	4
Other					
8' Valley (no laps)	sheet	9	10	10	10
10' Drip Edge (eaves + rakes; no laps)	sheet	23	25	25	26

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.