ASPHALT ROOF SYSTEM

JOB NAME

MATERIALS

~~IKO Cambridge AR~~ 3-TAB — 17⅔ sq x 72.00 = 1273
(include 10% waste/15% waste for hip roofs)
Hip & Ridge(30 LF /bdl) ___ bdl x 45.00 = ___
Starter (118 LF/bdl) ___ bdl x 69.00 = ___

Valley/Ice Guard
Metal W-channel (10ft) ___ pc x 30.00 = ___
Alcoa Ice Guard (65ft) 3 rolls x50.00 = 150

Drip/Rake Edge
Std. Drip (eave 10') ___ pc x 4.00 = ___
Std. Rake (10') ___ pc x 4.00 = ___
Lg. Drip ___ pc x 4.00 = ___
Lg. Rake ___ pc x 4.00 = ___

Underlayments
15 lb (4sq/roll) 4 rolls x22.00 = 88
30 lb (2sq/roll) ___ rolls x22.00 = ___
Repel Synth (10sq roll) ___ rolls x50.00 = ___

Ventilation
Lomanco750 ___ pc x14.00 = ___
Turbine ___ pc x 58.00 = ___
Power vent* ___ pc x130.00 = ___
Large Damper vent ___ pc x 31.00 = ___
Small Damper vent ___ pc x 20.00 = ___
Omni Roll Ridge vent (30ft/roll) ___ rollsx65.00 = ___

Pipe flashings
Aluminum ___ pc x 7.00 = ___
Split Boot ___ pc x 32.00= ___

Fasteners
Coil Nails (14sq/bx) 1.5 bx x 25.00 = 38
Cap Nails (same) 1.5 bx x 15.00 = 23

Decking
7/16" OSB 2 pc x 15 = 30
1/2" CDX ___ pc x = ___
1x board/$3ft ___ pc x = ___
***Call Lowes every 2 weeks for Price and add $2**

Step flashing
6"x8" (comp) 15 ft x 1.00 = 15
8"x14" (wood/skylights) ___ ft x 1.50 = ___
24" Roll metal ___ ft x 1.50 = ___

Skylight/Chimney materials reg. ___ x 20.00 = ___
large ___ x 35.00 = ___

Caulk: ___ 4 tbs x 7.00= 28
Paint: ___ 0 tbs x 6.00= ___

Total Materials 1645

INSTALL LABOR SCALE

USE WASTE AMOUNT OF SQUARES

Recover	$30 sq	x ___	= ___
1 layer off and on	$70 sq	x 17⅔	= 1237
2 layer off and on	$85 sq	x ___	= ___
Additional layers	$15 Ly	x ___	= ___
Re-sheet	$48 sq	x ___	= ___
Sheet over	$22.50sq	x ___	= ___
Steep (8/12-12/12)	$5 sq	x ___	= ___
Steep (12 +, per level)	Contractor meeting		
1 layer over wood shake & re-sheet	$135	x ___	= ___
Additional layer	$15 ea	x ___	= ___
Skylight	$75 ea	x ___	= ___
Cut in box vents	$10 ea	x ___	= ___
Plywood Repair	$15 Sh.	x 2	= 30
1" Boards	$3.50Ft.	x ___	= ___
Fascia Paint or wrap	$3.50ft	x ___	= ___
Chimney Flash (10")	$75Ea	x ___	= ___
Difficult Charge	$ 5 sq	x ___	= ___
Add on labor (every job)	$5 sq	x ___	= ___

Total Labor 1267

Miscellaneous

***Flat roof mat. & labor $550/sq (+lyrs or difficult = more $)**

Total Misc. ___
ALWAYS ADD 100

Materials	1645
+ 7%tax	116
Labor	1267
Total	3028
Total ÷ .65 %	4658
Misc.	___
Dump Trailer: load ($5 per sq) = 89	
Subtotal	4826.73
Price per sq	268.68

Type: Gable

Pitch: 5/12

Exs. Roof: 3-1 / 7/16" (3-1 Black)

Overhang 12"

Story: 1 2 3

TO/Rec: T.O

Exs. Sht: 7/16

Chimneys: Type FF/RF

Vent Pipes: 2" 3" 4"

Size Elect Mast

Flashing: vinyl/alum

Step 15" Cedar

Wall Brick

Ventilation: 750 S/R/C SORV R/C

Power Vent Turbine Vent

Soffit 4x16 6x16 8x16 Plug

Misc. Pro. SDV LDV HS SAT

Trim: white **Gutter:** white 5"

Overhang: 12"

Interior: **Sheet Repair:**


Temp/Humid **Truck Acc:** Blower

SF:		**SF:**	1555
Cap:		$7 **Cap:**	$7
Valley:		18 **Valley:**	45
Hip:		**Hip:**	
Start:	**Squares**	99 **Start:** 50 1737	**Squares** 17 2/3

Drawing ☐

Pictures ☐



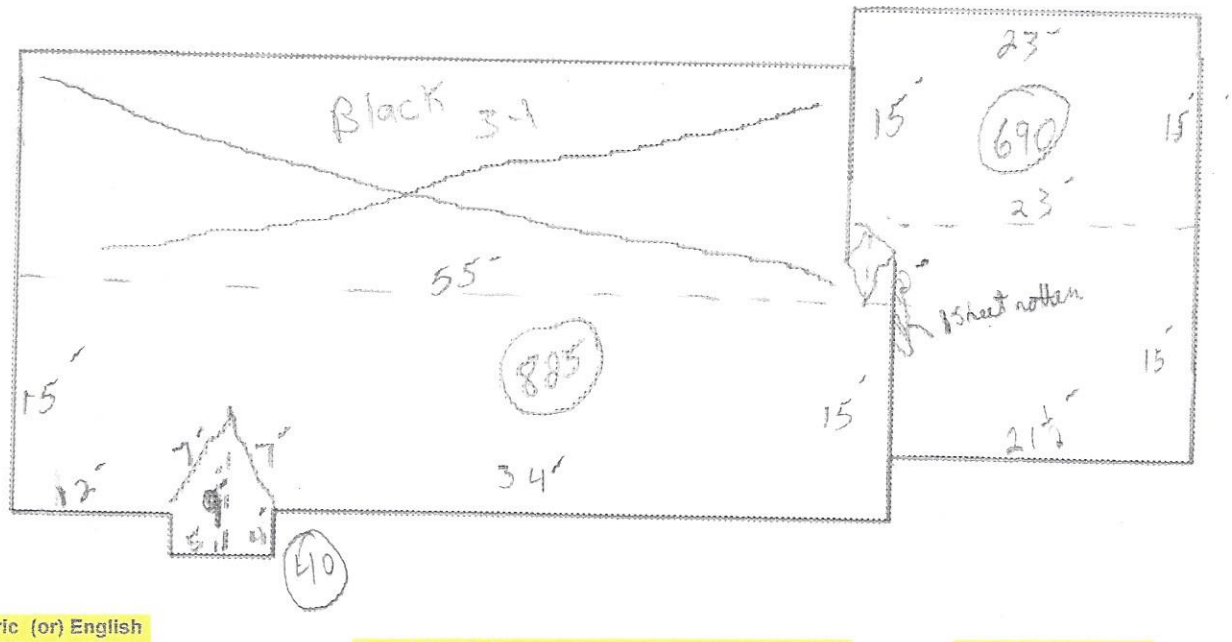

Metric (or) English
38 5/8" 36"

Exs Siding Color:

Shingle Color: