Roof Report

Prepared by Roofr


1011 Hazel Avenue, Englewood, OH 45322

Jesse Myers

2409 sqft

5 facets


Predominant pitch 4/12

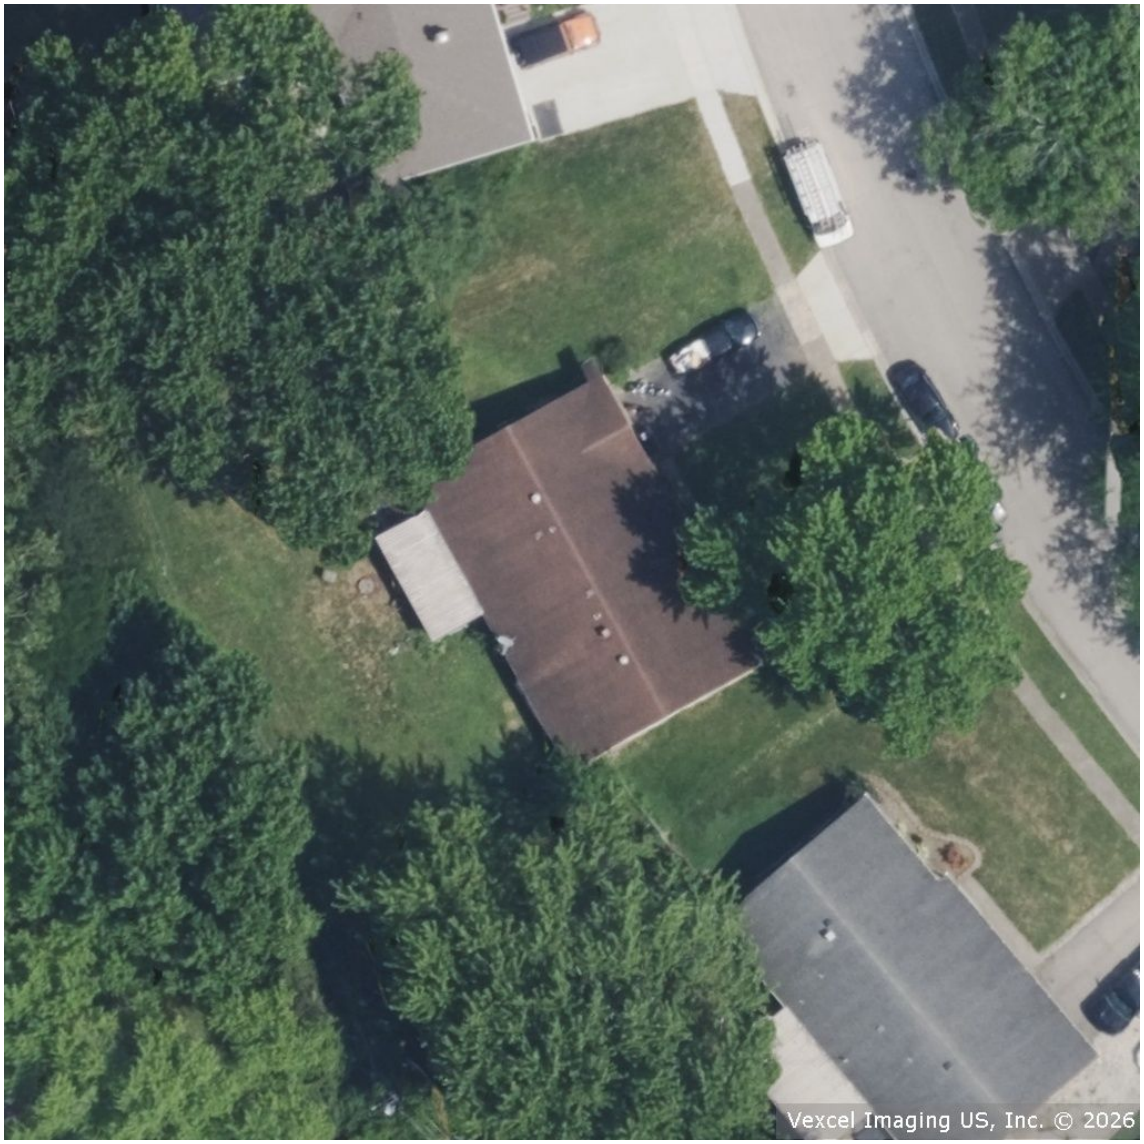

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

1011 Hazel Avenue, Englewood, OH 45322

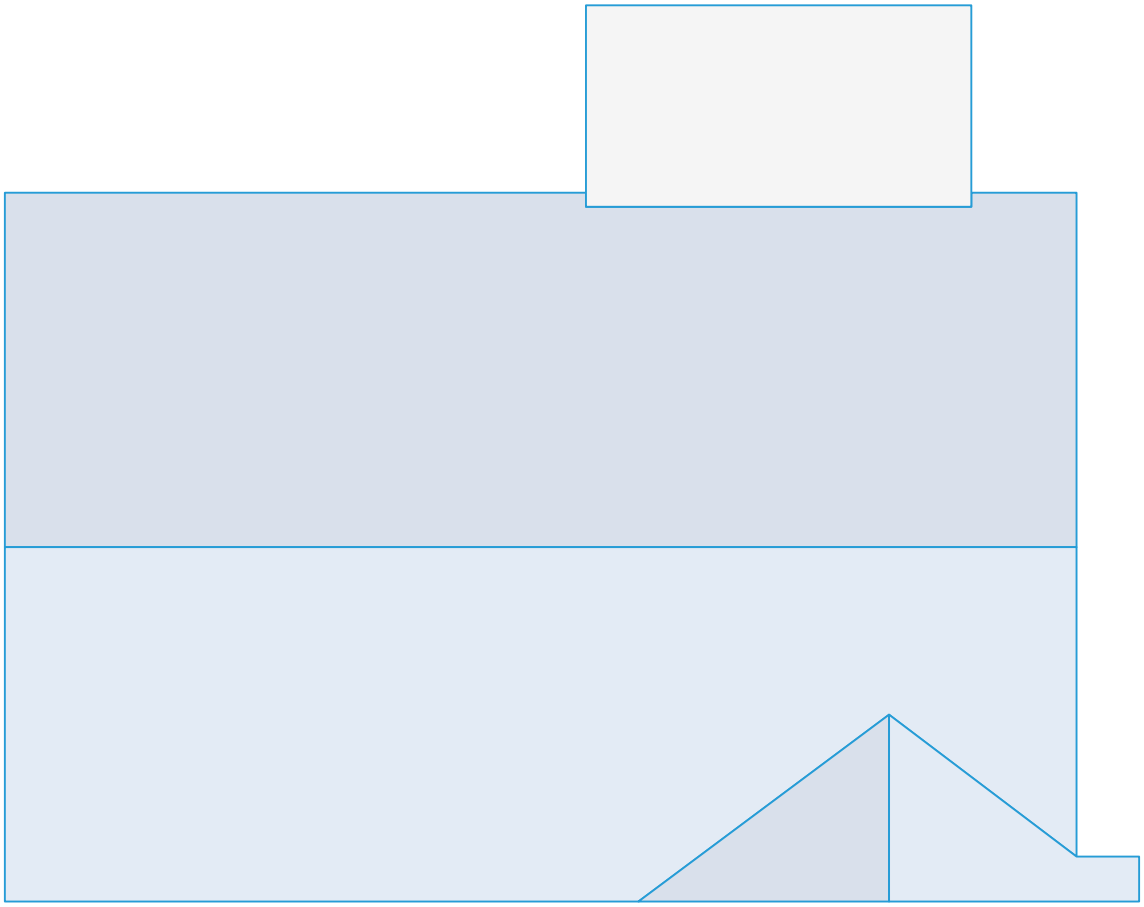


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

1011 Hazel Avenue, Englewood, OH 45322

- Eaves: 113ft 0in
- Ridges: 66ft 1in
- Step flashing: 1ft 7in
- Unspecified: 20ft 3in
- Valleys: 29ft 4in
- Rakes: 106ft 5in
- Transitions: 20ft 3in
- Hips: 0ft 0in
- Wall flashing: 0ft 0in
- Parapet wall: 0ft 0in

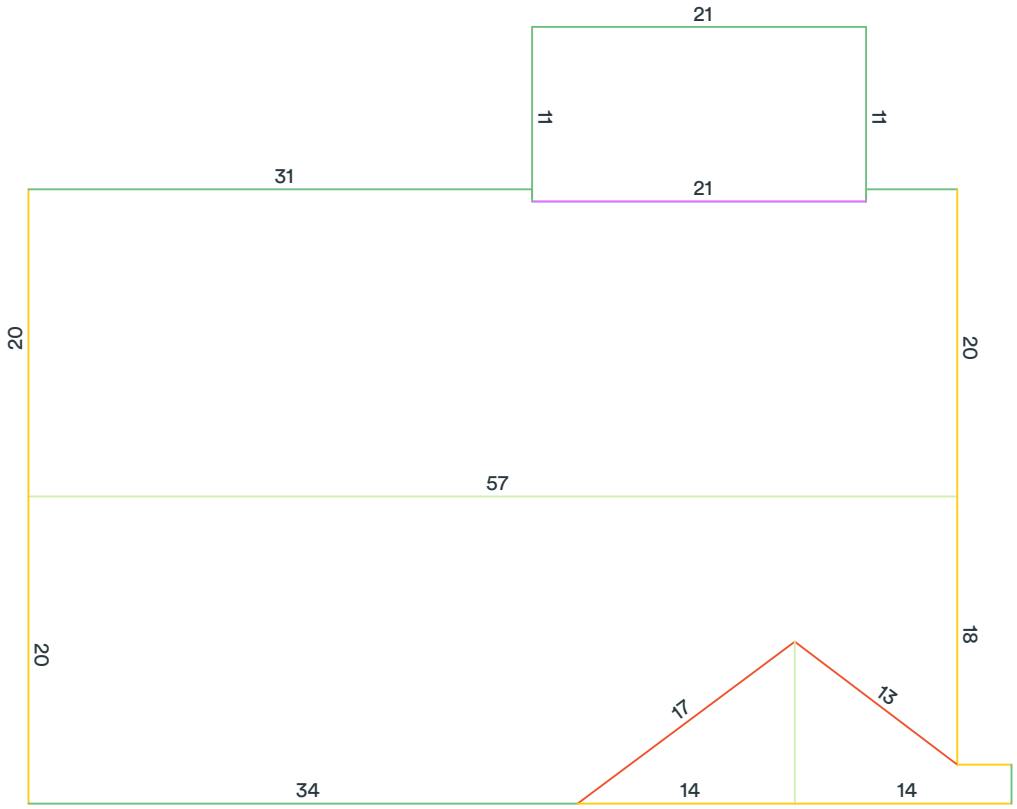

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

1011 Hazel Avenue, Englewood, OH 45322

Total roof area: 2409 sqft
Pitched roof area: 2195 sqft
Flat roof area: 214 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 4/12
Predominant pitch area: 2059 sqft
Unspecified pitch area: 0 sqft

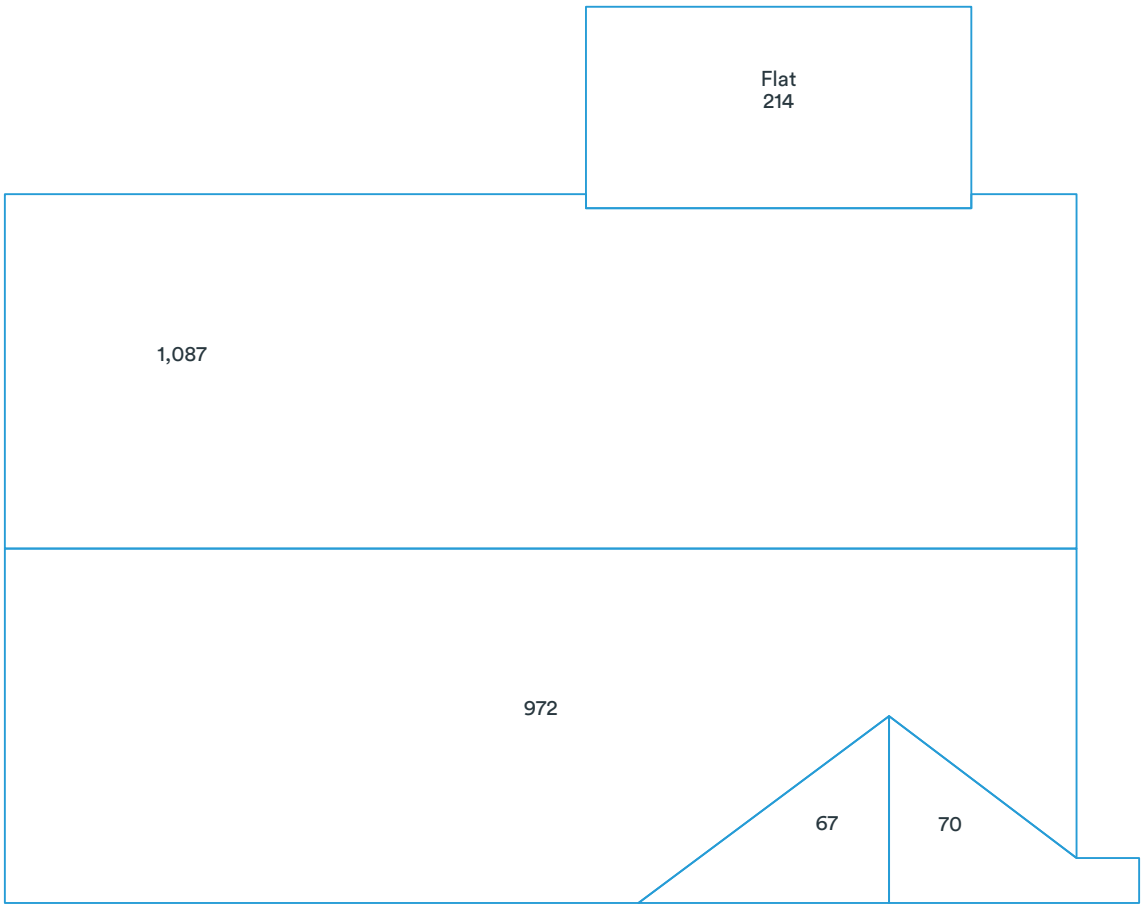


Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

1011 Hazel Avenue, Englewood, OH 45322

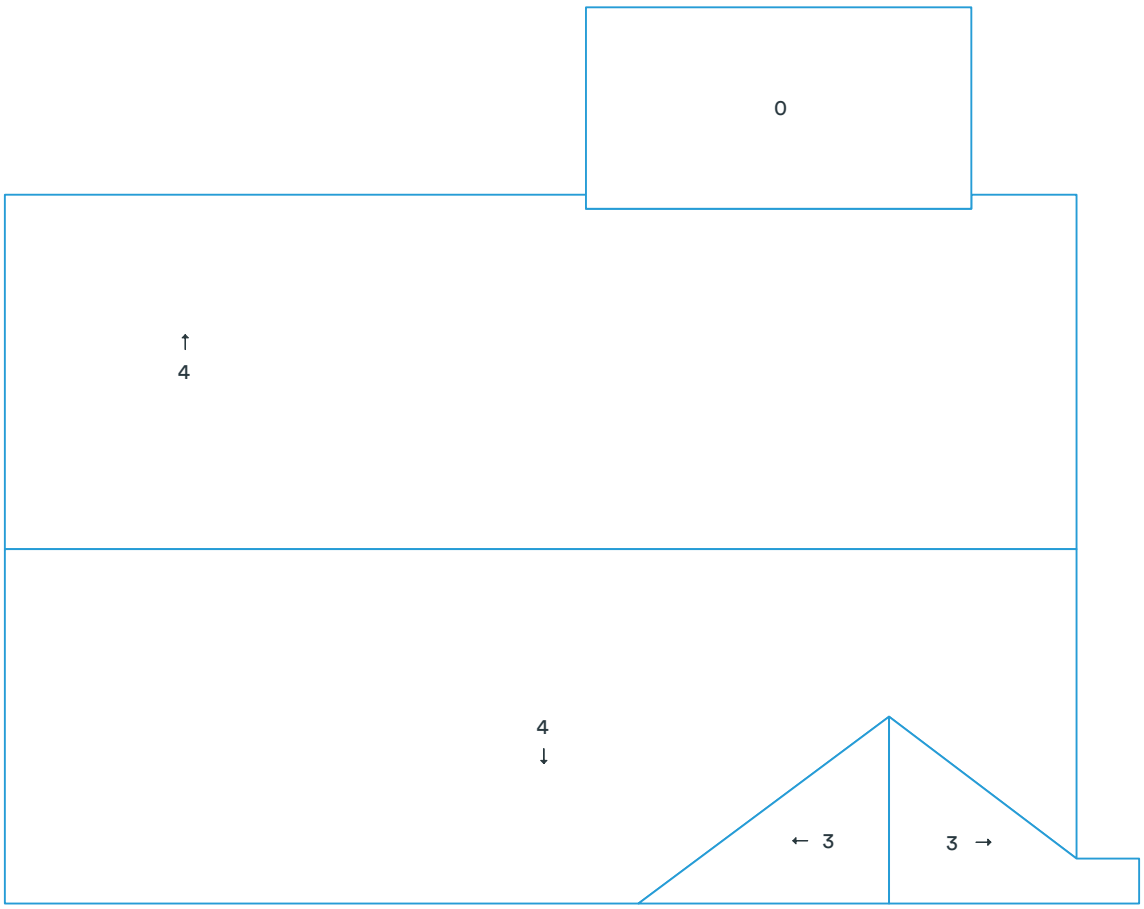




Deleted facets are designated with a dashed line and do not have a pitch.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

1011 Hazel Avenue, Englewood, OH 45322

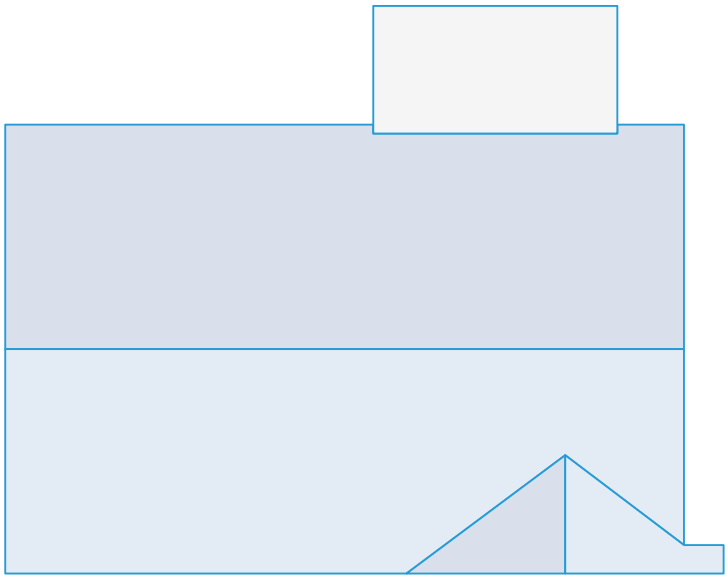

Measurements

Total roof area	2409 sqft
Total pitched area	2195 sqft
Total flat area	214 sqft
Total roof facets	5 facets
Predominant pitch	4/12
Total eaves	113ft 0in
Total valleys	29ft 4in
Total hips	0ft 0in
Total ridges	66ft 1in
Total rakes	106ft 5in
Total wall flashing	0ft 0in
Total step flashing	1ft 7in
Total transitions	20ft 3in
Total parapet wall	0ft 0in
Total unspecified	20ft 3in
Hips + ridges	66ft 1in
Eaves + rakes	219ft 5in

Pitch	0/12	3/12	4/12
Area (sqft)	214	137	2,059
Squares	2.2	1.4	20.6

Recommended

Waste %	0%	8%	10%	12%	15%	17%	20%
Area (sqft)	2,409	2,602	2,650	2,698	2,770	2,818	2,891
Squares	24.1	26.1	26.5	27.0	27.7	28.2	29.0

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

1011 Hazel Avenue, Englewood, OH 45322

Product	Unit	Waste (0%)	Waste (8%)	Waste (10%)	Waste (15%)
Shingle (total sqft)		2,195 sqft	2,371 sqft	2,415 sqft	2,524 sqft
IKO - Cambridge	bundle	66	72	73	76
CertainTeed - Landmark	bundle	67	73	74	77
GAF - Timberline	bundle	67	73	74	77
Owens Corning - Duration	bundle	67	73	74	77
Atlas - Pristine	bundle	67	72	74	77
Starter (eaves + rakes)		220 ft	237 ft	242 ft	253 ft
IKO - Leading Edge Plus	bundle	2	3	3	3
CertainTeed - SwiftStart	bundle	2	3	3	3
GAF - Pro-Start	bundle	2	2	3	3
Owens Corning - Starter Strip	bundle	3	3	3	3
Atlas - Pro-Cut	bundle	2	2	2	2
Ice and Water (eaves + valleys + flashings)		144 ft	156 ft	159 ft	166 ft
IKO - StormShield	roll	3	3	3	3
CertainTeed - WinterGuard	roll	3	3	3	3
GAF - WeatherWatch	roll	3	3	3	3
Owens Corning - WeatherLock	roll	2	3	3	3
Atlas - Weathermaster	roll	3	3	3	3
Synthetic (total sqft; no laps)		2,195 sqft	2,371 sqft	2,415 sqft	2,524 sqft
IKO - Stormtite	roll	3	3	3	3
CertainTeed - RoofRunner	roll	3	3	3	3
GAF - Deck-Armor	roll	3	3	3	3
Owens Corning - RhinoRoof	roll	3	3	3	3
Atlas - Summit	roll	3	3	3	3
Capping (hips + ridges)		67 ft	72 ft	73 ft	76 ft
IKO - Hip and Ridge	bundle	2	2	2	2
CertainTeed - Shadow Ridge	bundle	3	3	3	3
GAF - Seal-A-Ridge	bundle	3	3	3	4
Owens Corning - DecoRidge	bundle	4	4	4	4
Atlas - Pro-Cut H&R	bundle	3	3	3	3
Other					
8' Valley (no laps)	sheet	4	4	5	5
10' Drip Edge (eaves + rakes; no laps)	sheet	22	24	25	26

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.