Roof Report

Prepared by Rich Roofing & Services LLC

604 Lambert Drive, Piqua, OH 45356
Steve Cool


3744 sqft
11 facets
Predominant pitch 7/12



This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

604 Lambert Drive, Piqua, OH 45356

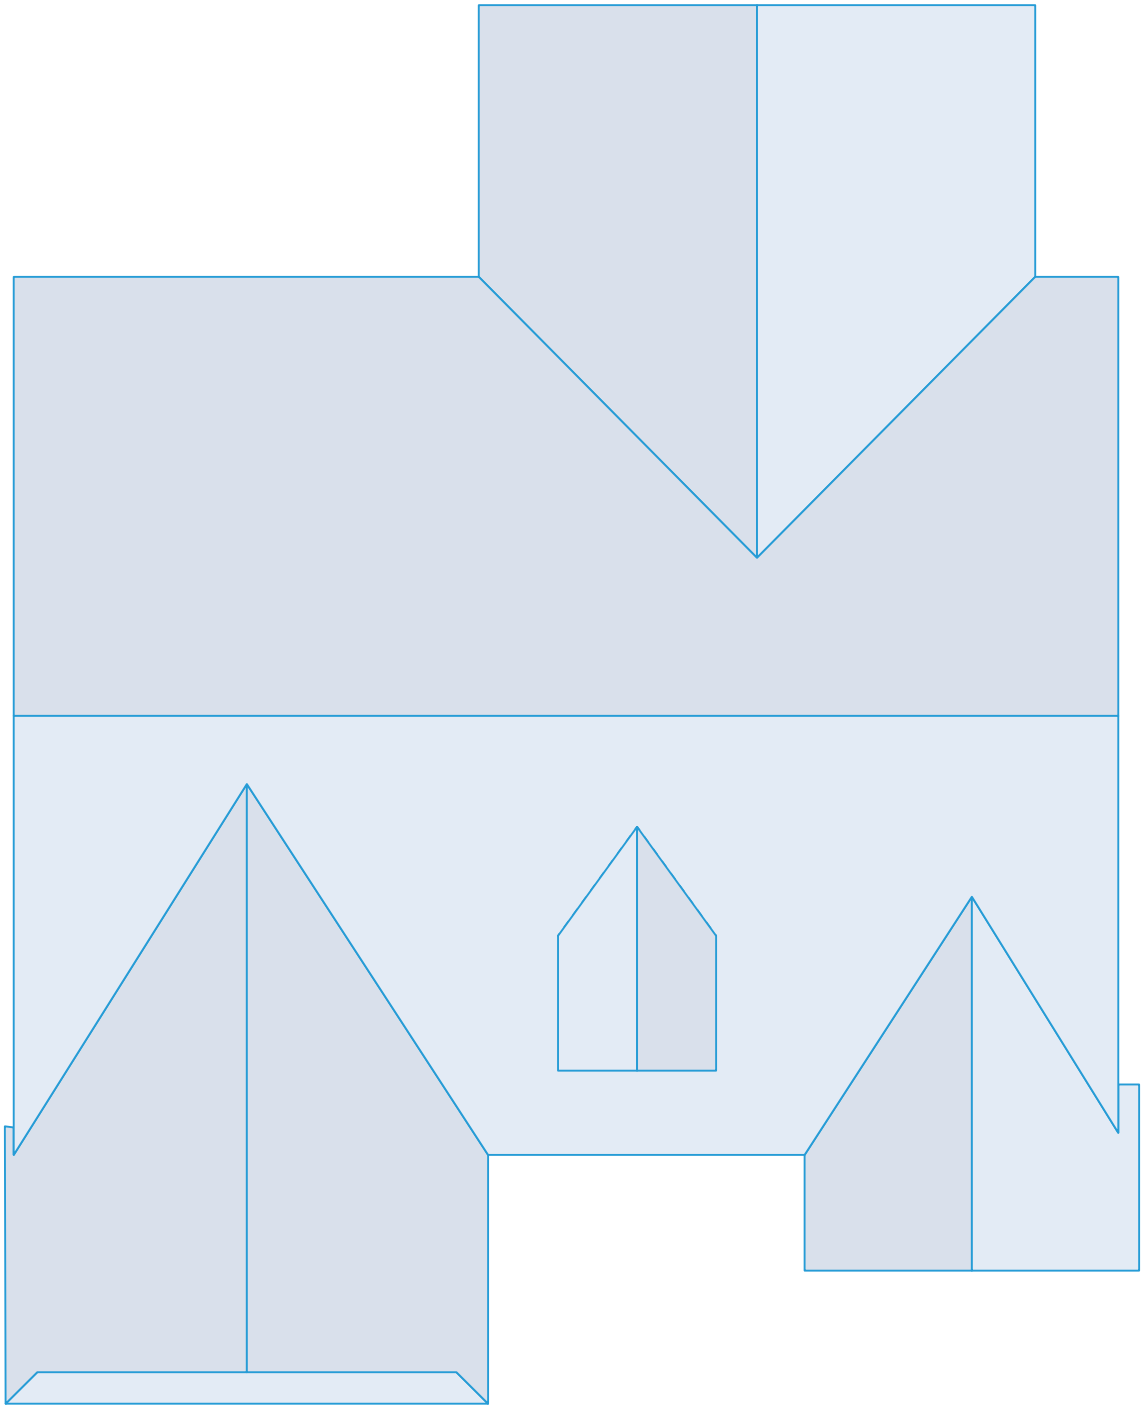


This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

604 Lambert Drive, Piqua, OH 45356

- Eaves: 145ft 7in
- Ridges: 139ft 6in
- Step flashing: 14ft 2in
- Unspecified: 88ft 10in
- Valleys: 138ft 0in
- Rakes: 194ft 0in
- Transitions: 0ft 0in
- Hips: 5ft 4in
- Wall flashing: 29ft 9in
- Parapet wall: 0ft 0in

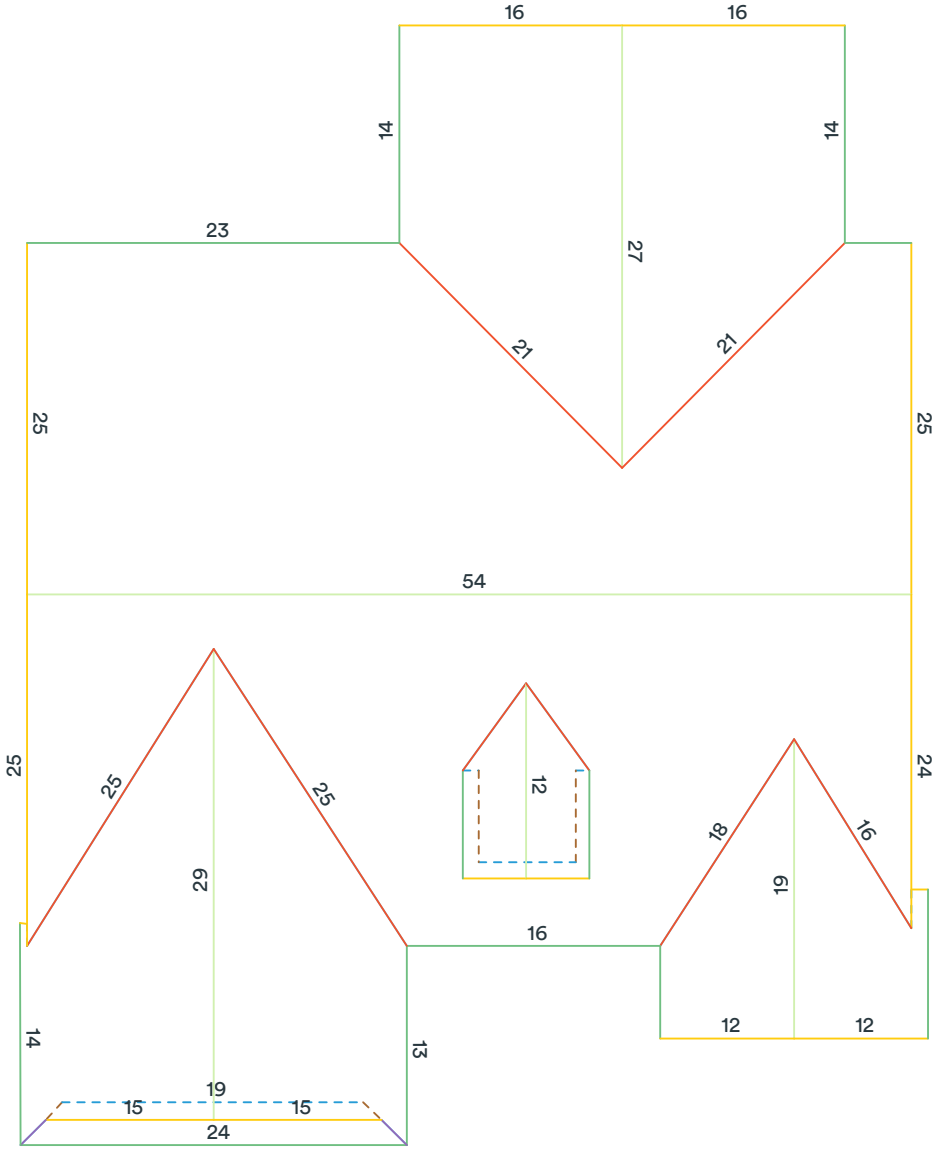

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

604 Lambert Drive, Piqua, OH 45356

Total roof area: 3744 sqft
Pitched roof area: 3744 sqft
Flat roof area: 0 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 7/12
Predominant pitch area: 2661 sqft
Unspecified pitch area: 54 sqft

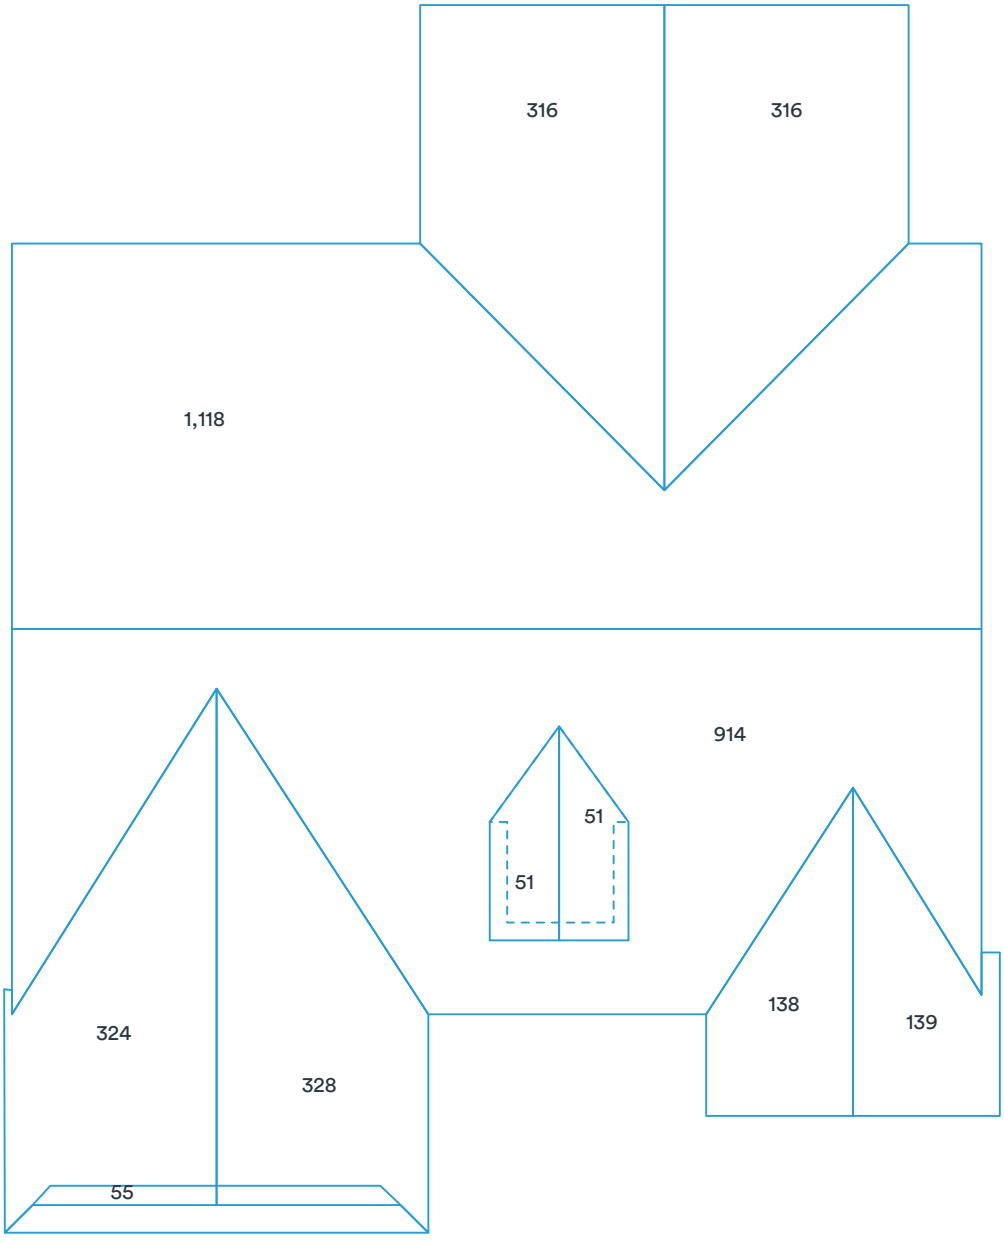


Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

604 Lambert Drive, Piqua, OH 45356

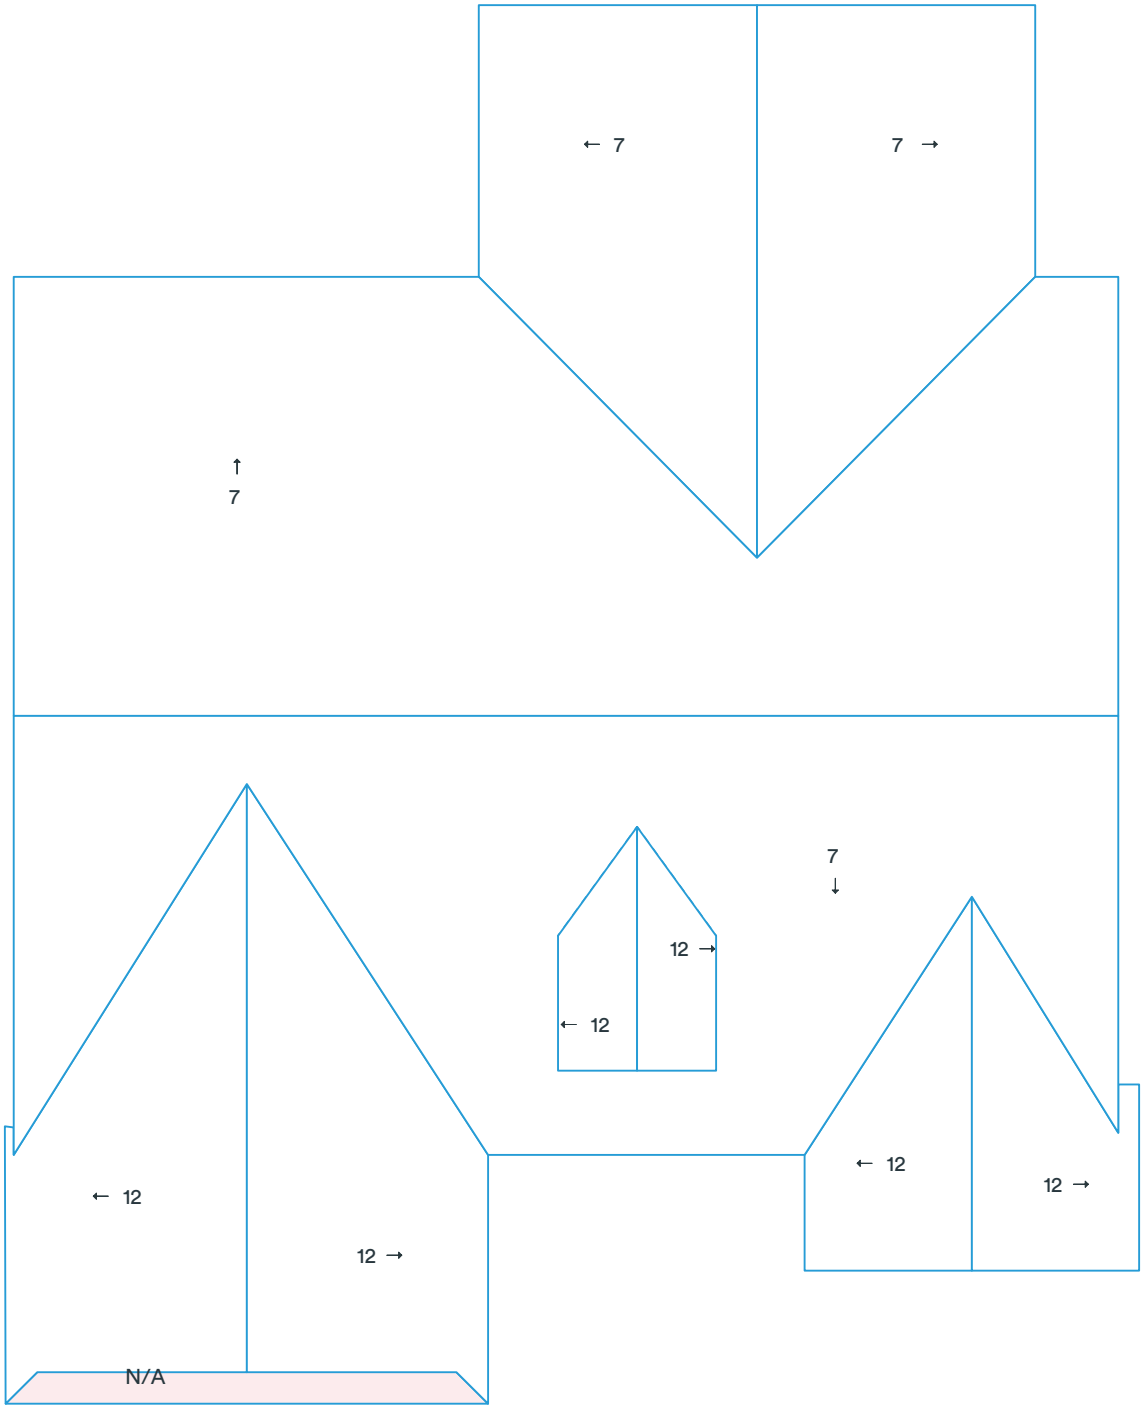


Deleted facets are designated with a dashed line and do not have a pitch.

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

604 Lambert Drive, Piqua, OH 45356

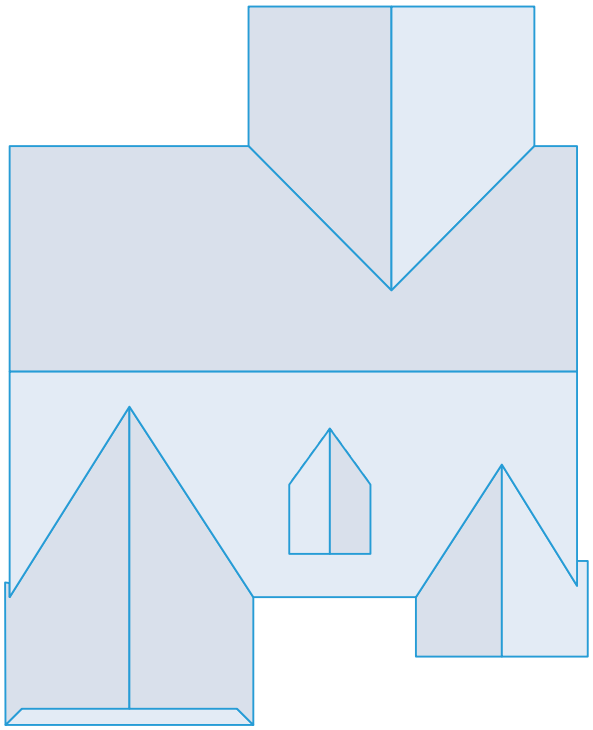

Measurements

Total roof area	3744 sqft
Total pitched area	3744 sqft
Total flat area	0 sqft
Total roof facets	11 facets
Predominant pitch	7/12
Total eaves	145ft 7in
Total valleys	138ft 0in
Total hips	5ft 4in
Total ridges	139ft 6in
Total rakes	194ft 0in
Total wall flashing	29ft 9in
Total step flashing	14ft 2in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	88ft 10in
Hips + ridges	144ft 10in
Eaves + rakes	339ft 8in

Pitch	N/A	7/12	12/12
Area (sqft)	55	2,661	1,029
Squares	0.6	26.7	10.3

				Recommended			
Waste %	0%	10%	12%	13%	15%	17%	20%
Area (sqft)	3,744	4,118	4,193	4,231	4,306	4,380	4,493
Squares	37.5	41.2	42.0	42.4	43.1	43.8	45.0

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

604 Lambert Drive, Piqua, OH 45356

Product	Unit	Waste (0%)	Waste (10%)	Waste (13%)	Waste (15%)
Shingle (total sqft)		3,744 sqft	4,118 sqft	4,231 sqft	4,306 sqft
IKO - Cambridge	bundle	113	124	128	130
CertainTeed - Landmark	bundle	115	126	129	132
GAF - Timberline	bundle	115	126	129	132
Owens Corning - Duration	bundle	115	126	129	132
Atlas - Pristine	bundle	114	125	129	131
Starter (eaves + rakes)		340 ft	374 ft	384 ft	391 ft
IKO - Leading Edge Plus	bundle	3	4	4	4
CertainTeed - SwiftStart	bundle	3	4	4	4
GAF - Pro-Start	bundle	3	4	4	4
Owens Corning - Starter Strip	bundle	4	4	4	4
Atlas - Pro-Cut	bundle	3	3	3	3
Ice and Water (eaves + valleys + flashings)		328 ft	361 ft	371 ft	377 ft
IKO - StormShield	roll	6	6	6	6
CertainTeed - WinterGuard	roll	6	6	6	6
GAF - WeatherWatch	roll	5	6	6	6
Owens Corning - WeatherLock	roll	5	5	5	6
Atlas - Weathermaster	roll	6	6	6	6
Synthetic (total sqft; no laps)		3,744 sqft	4,118 sqft	4,231 sqft	4,306 sqft
IKO - Stormtite	roll	4	5	5	5
CertainTeed - RoofRunner	roll	4	5	5	5
GAF - Deck-Armor	roll	4	5	5	5
Owens Corning - RhinoRoof	roll	4	5	5	5
Atlas - Summit	roll	4	5	5	5
Capping (hips + ridges)		145 ft	160 ft	164 ft	167 ft
IKO - Hip and Ridge	bundle	4	5	5	5
CertainTeed - Shadow Ridge	bundle	5	6	6	6
GAF - Seal-A-Ridge	bundle	6	7	7	7
Owens Corning - DecoRidge	bundle	8	8	9	9
Atlas - Pro-Cut H&R	bundle	5	6	6	6
Other					
8' Valley (no laps)	sheet	18	19	20	20
10' Drip Edge (eaves + rakes; no laps)	sheet	34	38	39	40

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.