Roof Report

Prepared by Roofr

1337 Croydon Road, Troy, OH 45373
Mike Shultz


1500 sqft
3 facets
Predominant pitch 6/12



This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

1337 Croydon Road, Troy, OH 45373




This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

1337 Croydon Road, Troy, OH 45373

- Eaves: 89ft 1in
- Ridges: 45ft 3in
- Step flashing: 20ft 0in
- Unspecified: 21ft 0in
- Valleys: 0ft 0in
- Rakes: 84ft 7in
- Transitions: 0ft 0in
- Hips: 0ft 0in
- Wall flashing: 0ft 9in
- Parapet wall: 0ft 0in

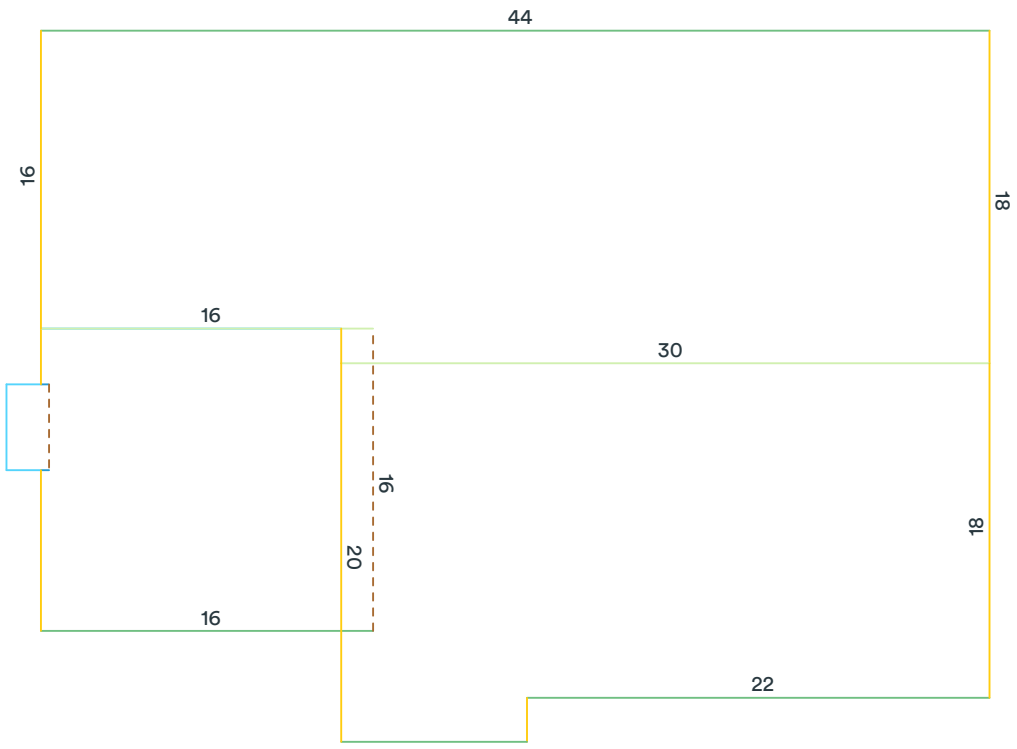



Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

1337 Croydon Road, Troy, OH 45373

Total roof area: 1500 sqft
Pitched roof area: 1500 sqft
Flat roof area: 0 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 6/12
Predominant pitch area: 1500 sqft
Unspecified pitch area: 0 sqft

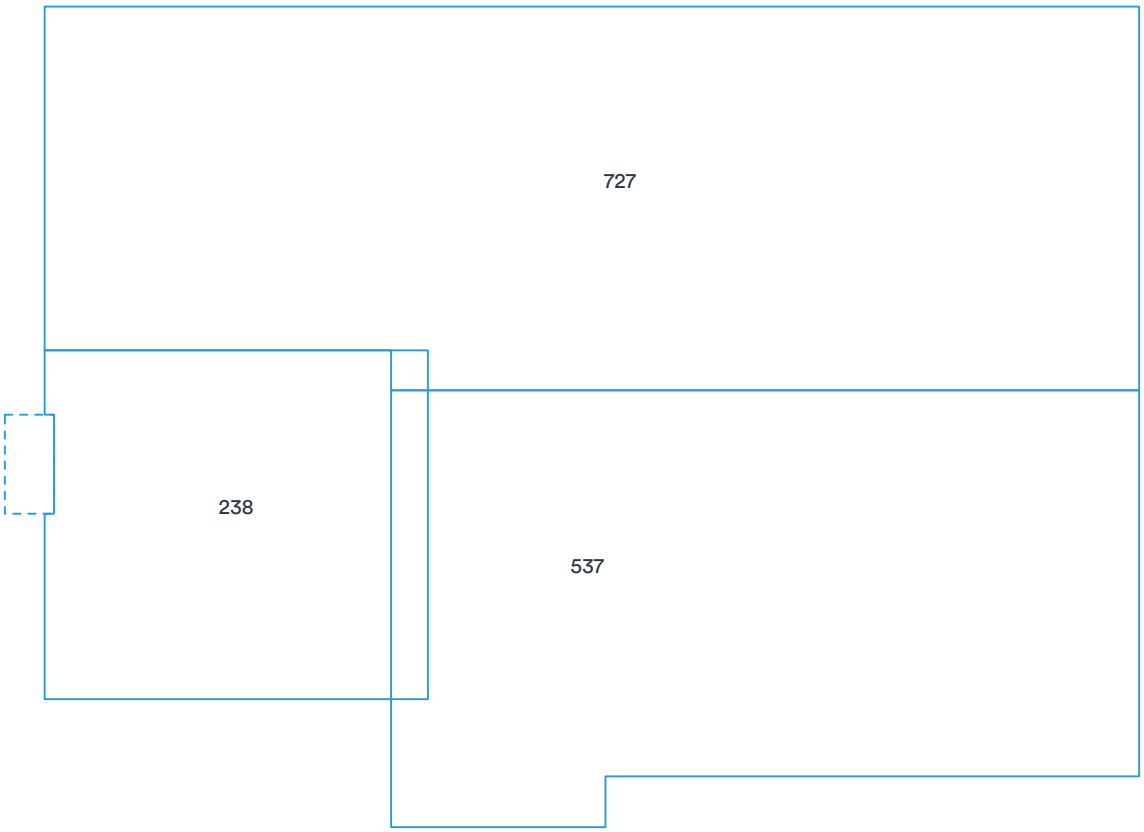




Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

1337 Croydon Road, Troy, OH 45373

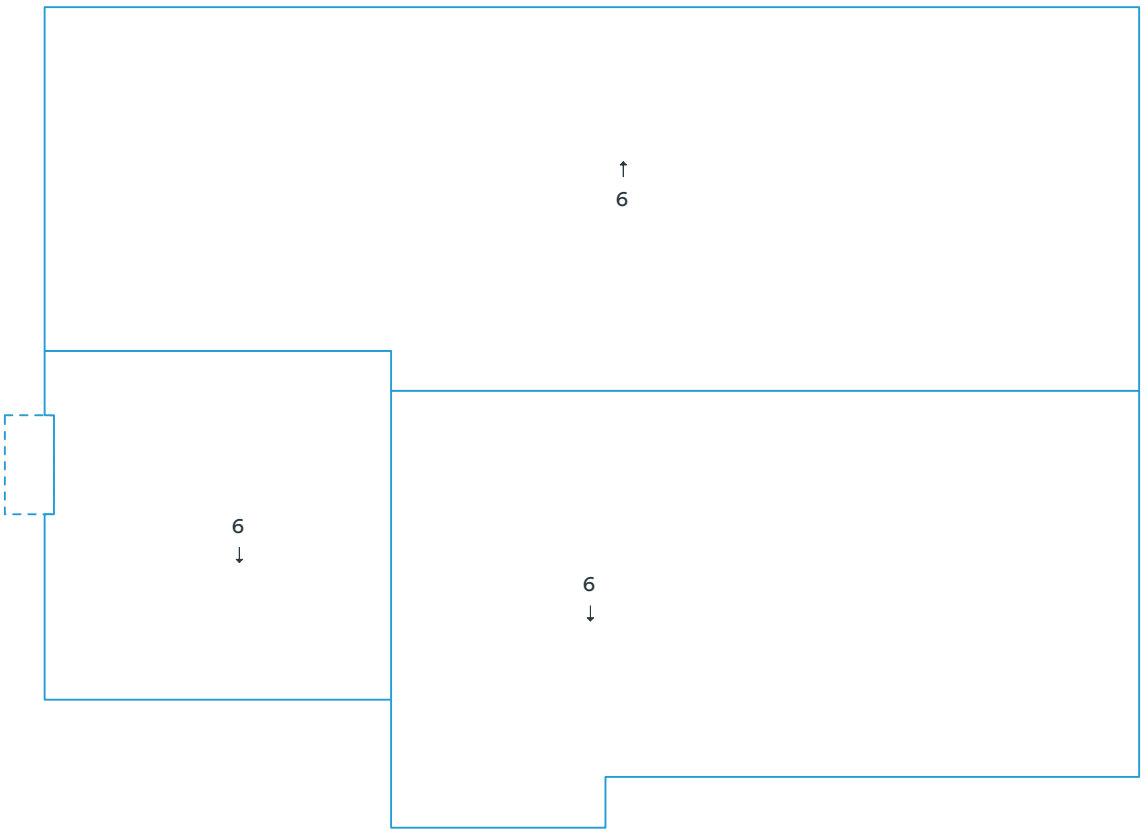




Deleted facets are designated with a dashed line and do not have a pitch.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

1337 Croydon Road, Troy, OH 45373

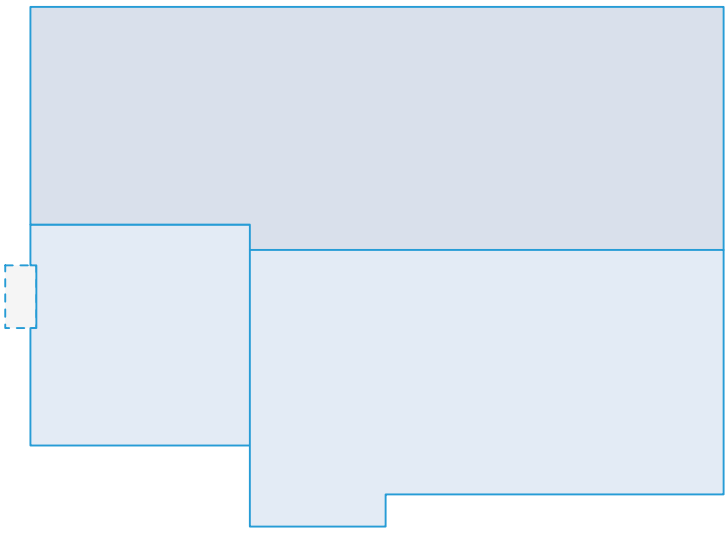

Measurements

Total roof area	1500 sqft
Total pitched area	1500 sqft
Total flat area	0 sqft
Total roof facets	3 facets
Predominant pitch	6/12
Total eaves	89ft 1in
Total valleys	0ft 0in
Total hips	0ft 0in
Total ridges	45ft 3in
Total rakes	84ft 7in
Total wall flashing	0ft 9in
Total step flashing	20ft 0in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	21ft 0in
Hips + ridges	45ft 3in
Eaves + rakes	173ft 7in

Pitch 6/12

Area (sqft)	1,501
Squares	15.1

		Recommended				
Waste %	0%	9%	10%	12%	15%	17%	20%
Area (sqft)	1,501	1,636	1,651	1,681	1,726	1,756	1,801
Squares	15.1	16.4	16.6	16.9	17.3	17.6	18.1

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

1337 Croydon Road, Troy, OH 45373

Product	Unit	Waste (0%)	Waste (9%)	Waste (10%)	Waste (15%)
Shingle (total sqft)		1,501 sqft	1,636 sqft	1,651 sqft	1,726 sqft
IKO - Cambridge	bundle	46	50	50	52
CertainTeed - Landmark	bundle	46	50	51	53
GAF - Timberline	bundle	46	50	51	53
Owens Corning - Duration	bundle	46	50	51	53
Atlas - Pristine	bundle	46	50	51	53
Starter (eaves + rakes)		174 ft	190 ft	191 ft	200 ft
IKO - Leading Edge Plus	bundle	2	2	2	2
CertainTeed - SwiftStart	bundle	2	2	2	2
GAF - Pro-Start	bundle	2	2	2	2
Owens Corning - Starter Strip	bundle	2	2	2	2
Atlas - Pro-Cut	bundle	2	2	2	2
Ice and Water (eaves + valleys + flashings)		110 ft	120 ft	121 ft	127 ft
IKO - StormShield	roll	2	2	2	2
CertainTeed - WinterGuard	roll	2	2	2	2
GAF - WeatherWatch	roll	2	2	2	2
Owens Corning - WeatherLock	roll	2	2	2	2
Atlas - Weathermaster	roll	2	2	2	2
Synthetic (total sqft; no laps)		1,501 sqft	1,636 sqft	1,651 sqft	1,726 sqft
IKO - Stormtite	roll	2	2	2	2
CertainTeed - RoofRunner	roll	2	2	2	2
GAF - Deck-Armor	roll	2	2	2	2
Owens Corning - RhinoRoof	roll	2	2	2	2
Atlas - Summit	roll	2	2	2	2
Capping (hips + ridges)		46 ft	50 ft	50 ft	53 ft
IKO - Hip and Ridge	bundle	2	2	2	2
CertainTeed - Shadow Ridge	bundle	2	2	2	2
GAF - Seal-A-Ridge	bundle	2	2	2	3
Owens Corning - DecoRidge	bundle	3	3	3	3
Atlas - Pro-Cut H&R	bundle	2	2	2	2
Other					
8' Valley (no laps)	sheet	0	0	0	0
10' Drip Edge (eaves + rakes; no laps)	sheet	18	19	20	20

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.