
Roof Report

Prepared by Roofr

6500 U.S. 40, Tipp City, OH 45371
Karen Koenig


2043 sqft
9 facets
Predominant pitch 7/12

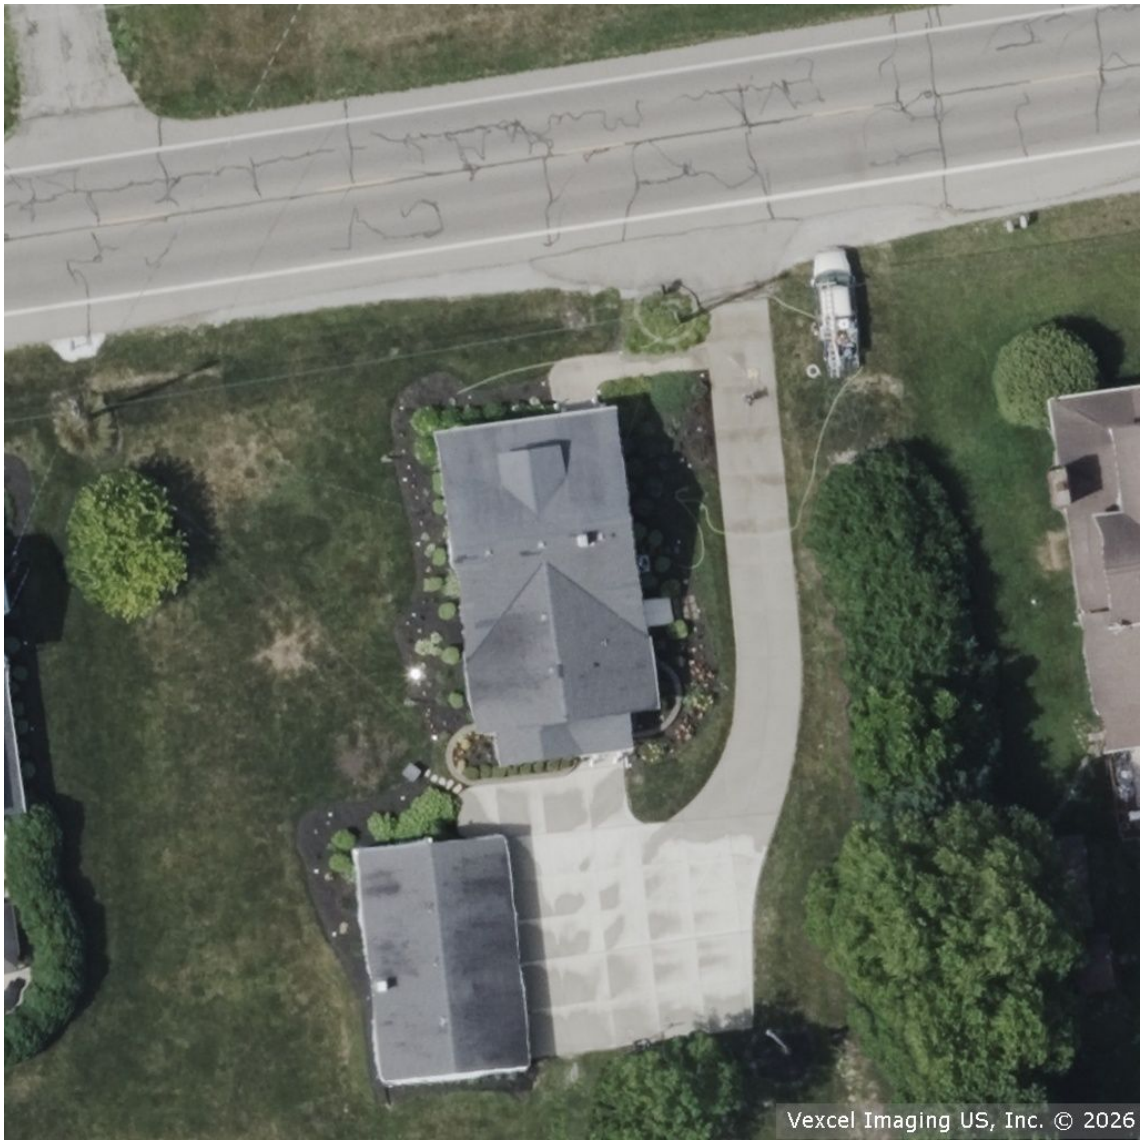

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

6500 U.S. 40, Tipp City, OH 45371

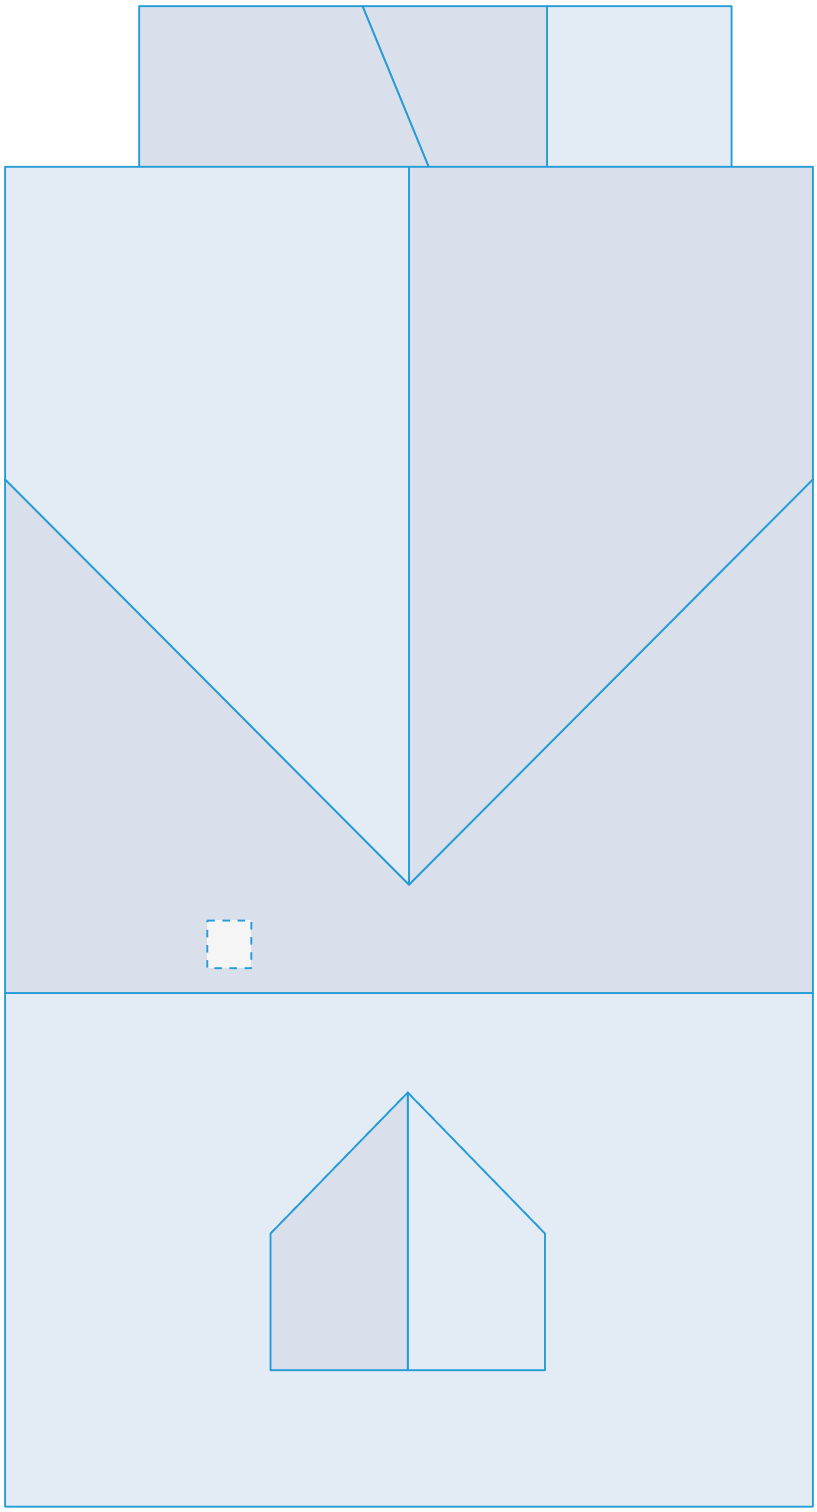


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

6500 U.S. 40, Tipp City, OH 45371

- Eaves: 81ft 3in
- Ridges: 76ft 5in
- Step flashing: 25ft 2in
- Unspecified: 15ft 1in
- Valleys: 72ft 0in
- Rakes: 163ft 3in
- Transitions: 0ft 0in
- Hips: 0ft 0in
- Wall flashing: 25ft 5in
- Parapet wall: 0ft 0in

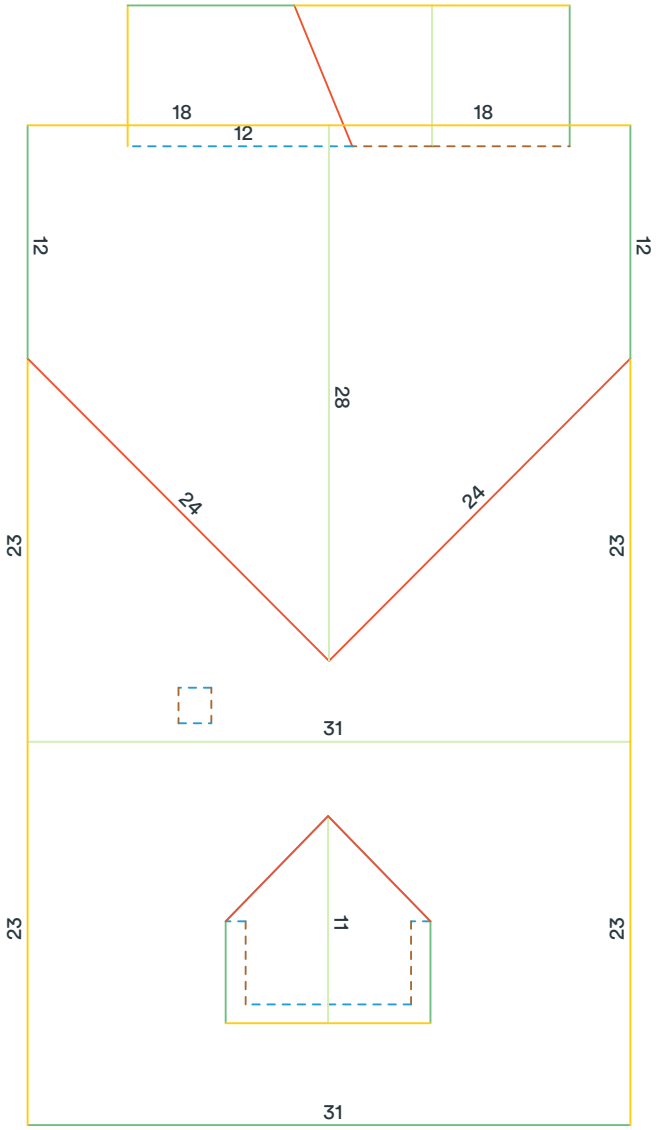

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

6500 U.S. 40, Tipp City, OH 45371

Total roof area: 2043 sqft
Pitched roof area: 2043 sqft
Flat roof area: 0 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 7/12
Predominant pitch area: 1967 sqft
Unspecified pitch area: 0 sqft

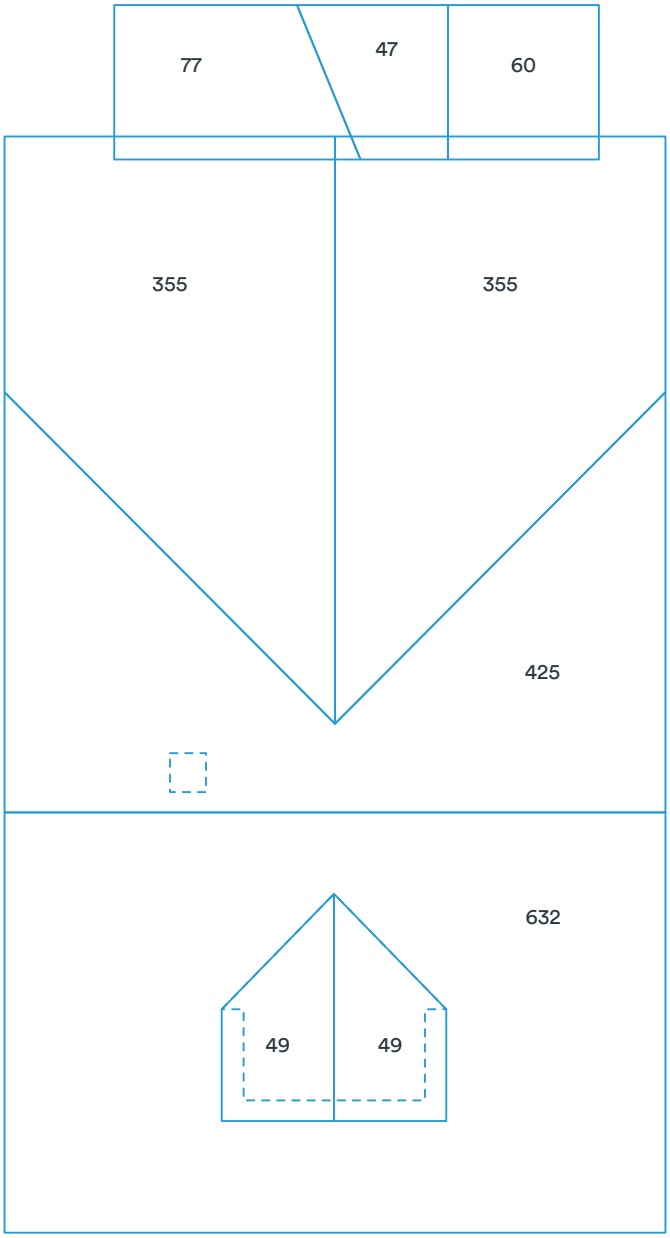


Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

6500 U.S. 40, Tipp City, OH 45371

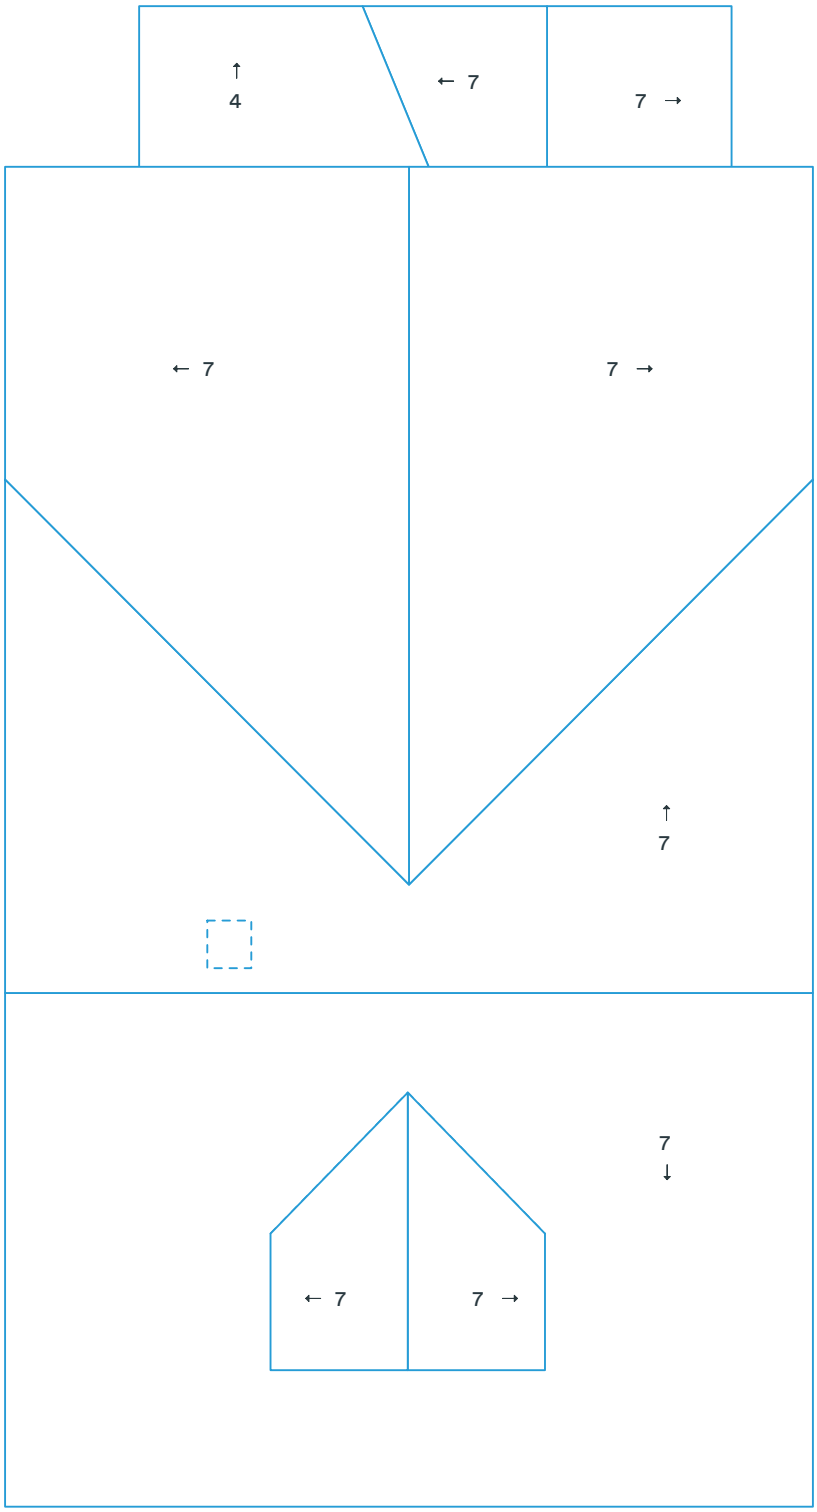


Deleted facets are designated with a dashed line and do not have a pitch.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

6500 U.S. 40, Tipp City, OH 45371

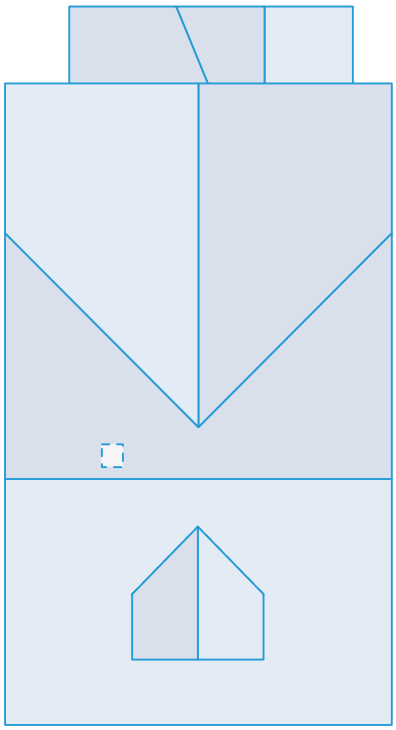

Measurements

Total roof area	2043 sqft
Total pitched area	2043 sqft
Total flat area	0 sqft
Total roof facets	9 facets
Predominant pitch	7/12
Total eaves	81ft 3in
Total valleys	72ft 0in
Total hips	0ft 0in
Total ridges	76ft 5in
Total rakes	163ft 3in
Total wall flashing	25ft 5in
Total step flashing	25ft 2in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	15ft 1in
Hips + ridges	76ft 5in
Eaves + rakes	244ft 6in

Pitch	4/12	7/12
Area (sqft)	77	1,967
Squares	0.8	19.7

					Recommended		
Waste %	0%	10%	12%	15%	17%	20%	22%
Area (sqft)	2,044	2,248	2,289	2,350	2,391	2,453	2,493
Squares	20.5	22.5	22.9	23.5	24.0	24.6	25.0

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

6500 U.S. 40, Tipp City, OH 45371

Product	Unit	Waste (10%)	Waste (15%)	Waste (17%)	Waste (20%)
Shingle (total sqft)		2,248 sqft	2,350 sqft	2,391 sqft	2,453 sqft
IKO - Cambridge	bundle	68	71	72	74
CertainTeed - Landmark	bundle	69	72	73	75
GAF - Timberline	bundle	69	72	73	75
Owens Corning - Duration	bundle	69	72	73	75
Atlas - Pristine	bundle	69	72	73	75
Starter (eaves + rakes)		269 ft	282 ft	287 ft	294 ft
IKO - Leading Edge Plus	bundle	3	3	3	3
CertainTeed - SwiftStart	bundle	3	3	3	3
GAF - Pro-Start	bundle	3	3	3	3
Owens Corning - Starter Strip	bundle	3	3	3	3
Atlas - Pro-Cut	bundle	2	3	3	3
Ice and Water (eaves + valleys + flashings)		225 ft	235 ft	239 ft	245 ft
IKO - StormShield	roll	4	4	4	4
CertainTeed - WinterGuard	roll	4	4	4	4
GAF - WeatherWatch	roll	4	4	4	4
Owens Corning - WeatherLock	roll	3	4	4	4
Atlas - Weathermaster	roll	4	4	4	4
Synthetic (total sqft; no laps)		2,248 sqft	2,350 sqft	2,391 sqft	2,453 sqft
IKO - Stormtite	roll	3	3	3	3
CertainTeed - RoofRunner	roll	3	3	3	3
GAF - Deck-Armor	roll	3	3	3	3
Owens Corning - RhinoRoof	roll	3	3	3	3
Atlas - Summit	roll	3	3	3	3
Capping (hips + ridges)		85 ft	88 ft	90 ft	92 ft
IKO - Hip and Ridge	bundle	3	3	3	3
CertainTeed - Shadow Ridge	bundle	3	3	3	4
GAF - Seal-A-Ridge	bundle	4	4	4	4
Owens Corning - DecoRidge	bundle	5	5	5	5
Atlas - Pro-Cut H&R	bundle	3	3	3	3
Other					
8' Valley (no laps)	sheet	10	11	11	11
10' Drip Edge (eaves + rakes; no laps)	sheet	27	29	29	30

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.