
Roof Report

Prepared by Rich Roofing & Services LLC

10 South High Street, Covington, OH 45318
Alex Moore-Moore Funeral Home


6736 sqft
18 facets
Predominant pitch 6/12

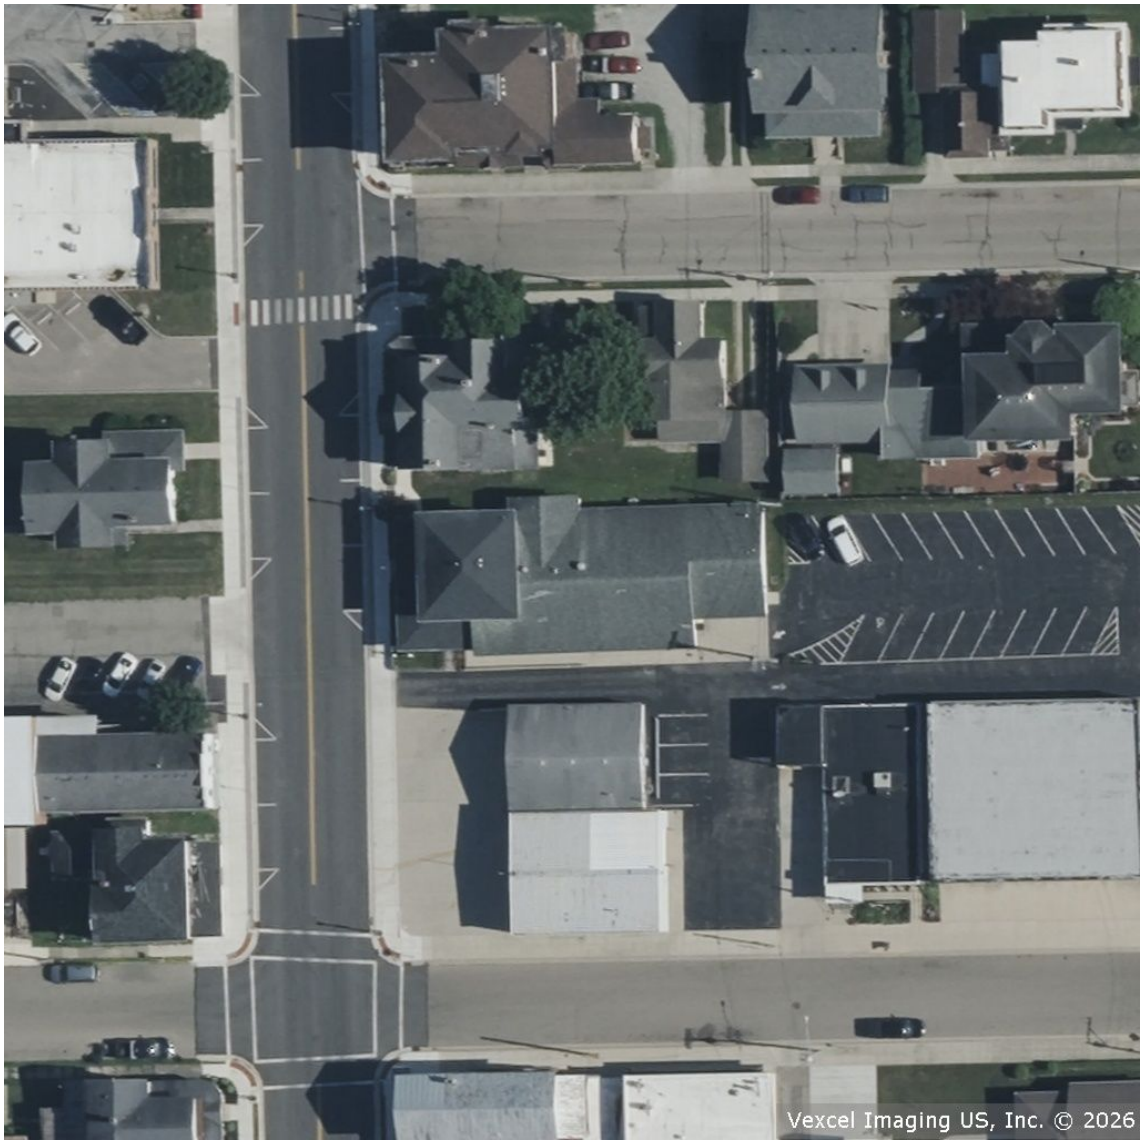

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

10 South High Street, Covington, OH 45318

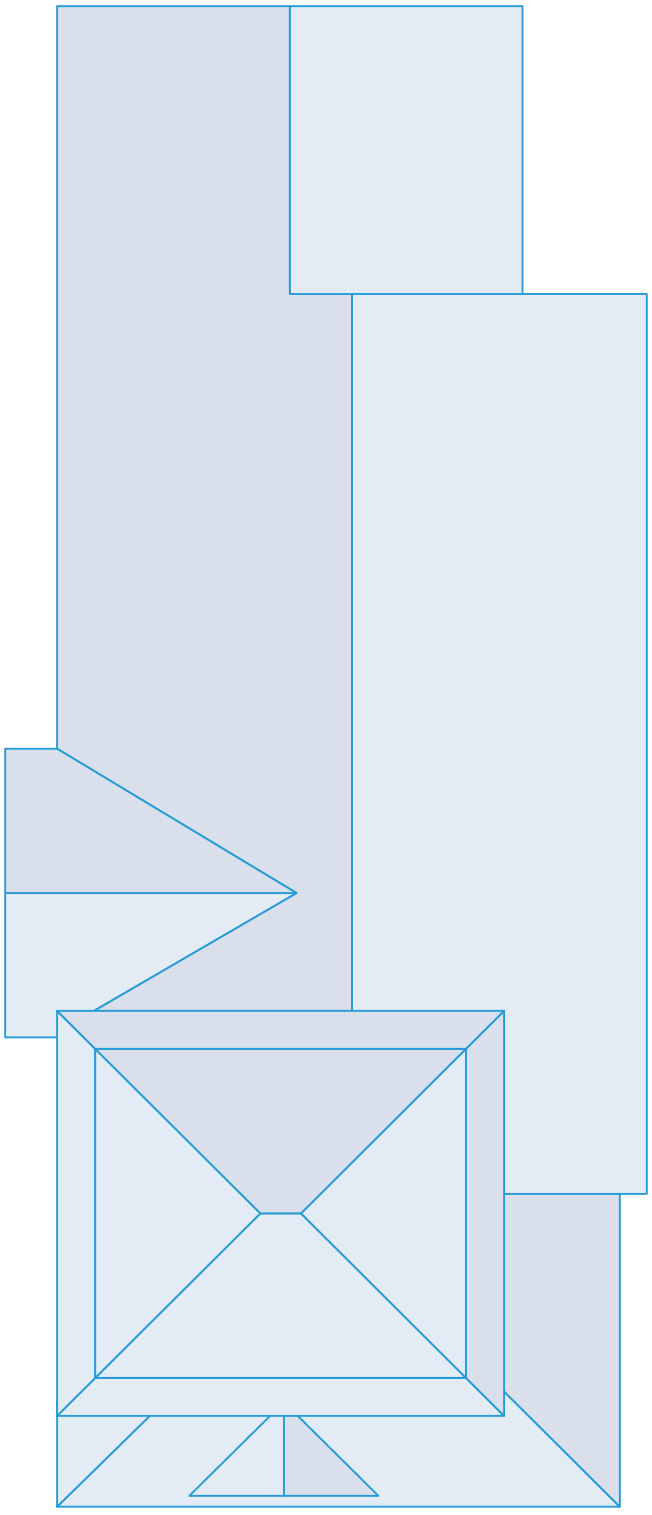


This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

10 South High Street, Covington, OH 45318

- Eaves: 395ft 6in
- Ridges: 119ft 5in
- Step flashing: 85ft 8in
- Unspecified: 42ft 6in
- Valleys: 72ft 1in
- Rakes: 134ft 9in
- Transitions: 113ft 10in
- Hips: 129ft 10in
- Wall flashing: 71ft 7in
- Parapet wall: 0ft 0in

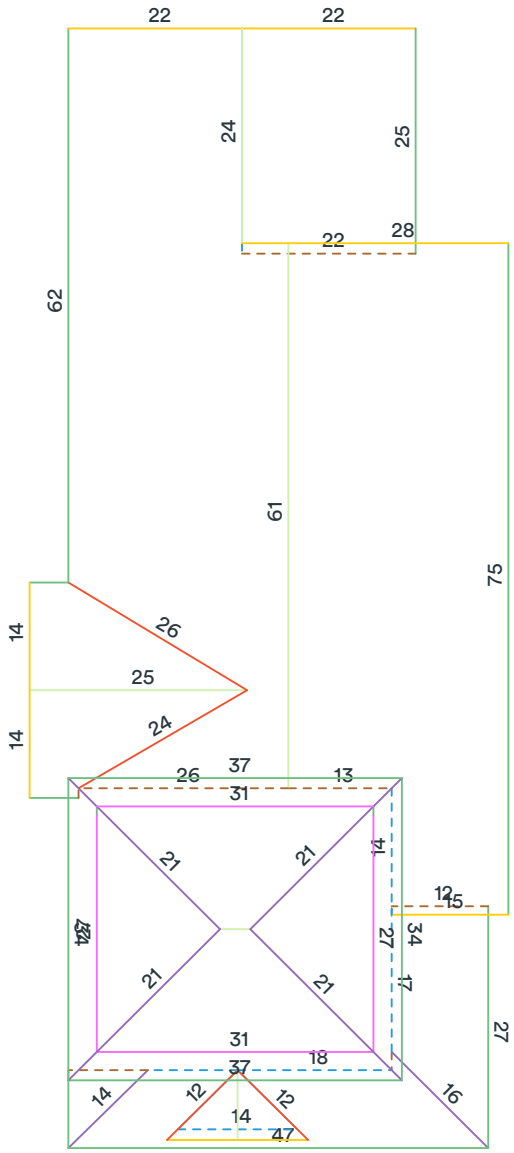

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

10 South High Street, Covington, OH 45318

Total roof area: 6736 sqft
Pitched roof area: 6736 sqft
Flat roof area: 0 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 6/12
Predominant pitch area: 6736 sqft
Unspecified pitch area: 0 sqft

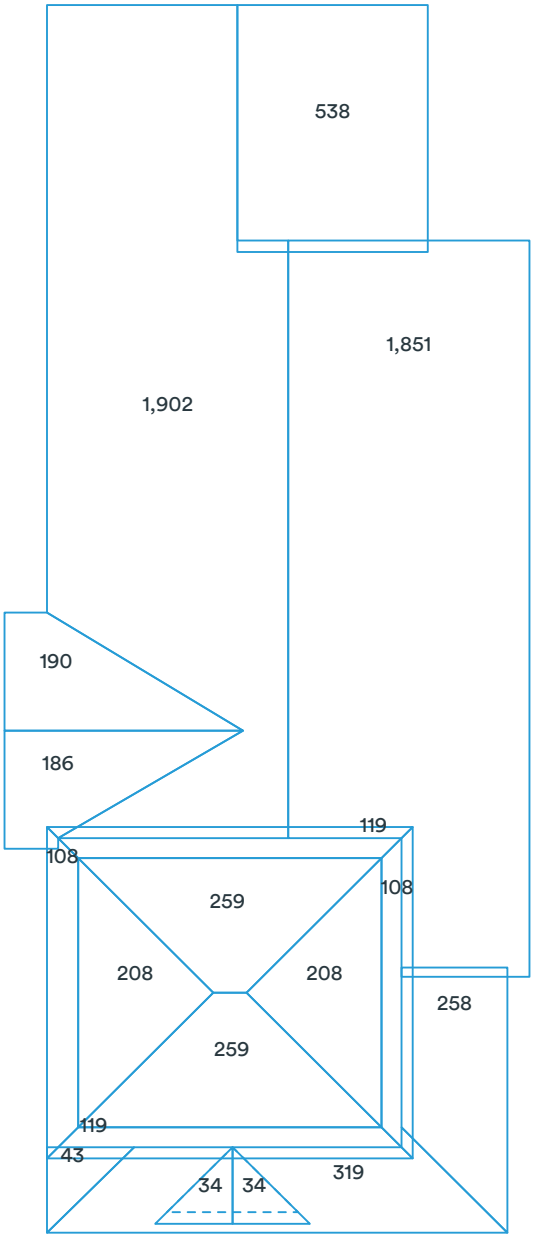


Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

10 South High Street, Covington, OH 45318

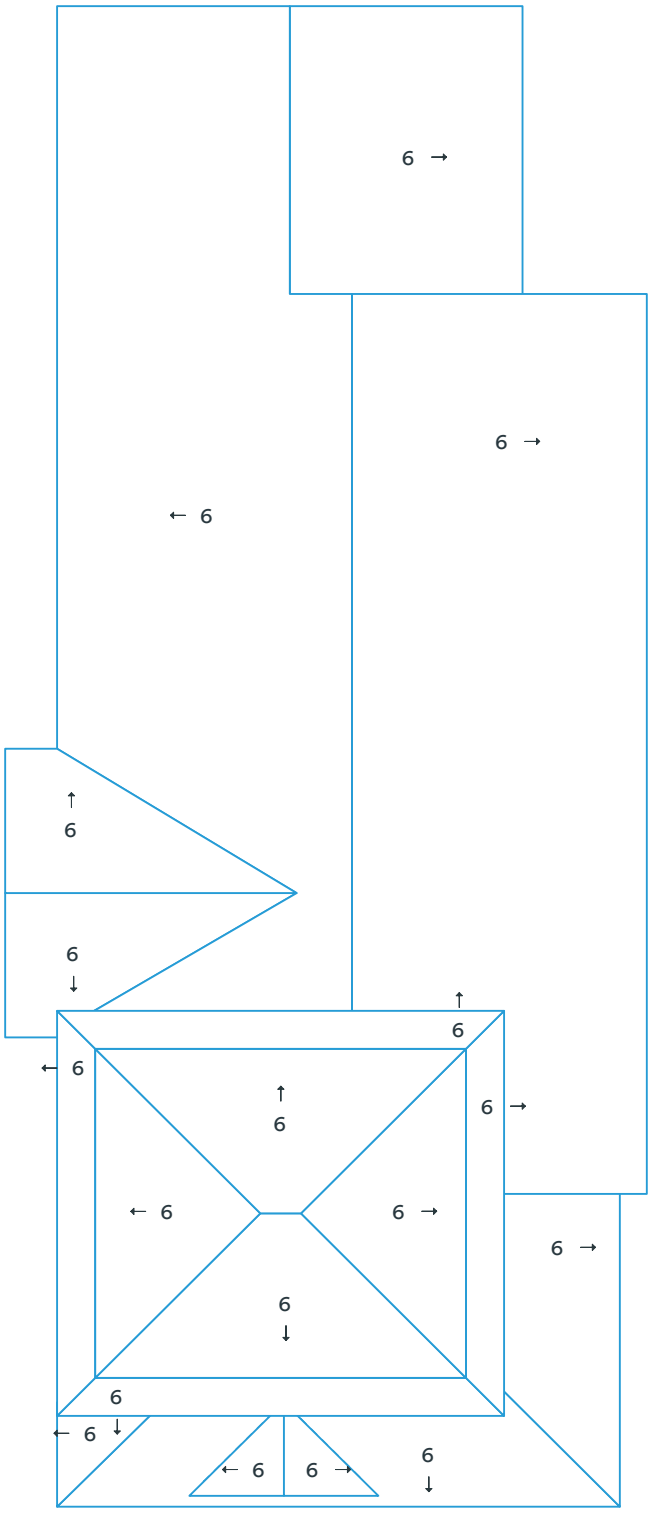


Deleted facets are designated with a dashed line and do not have a pitch.

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

10 South High Street, Covington, OH 45318

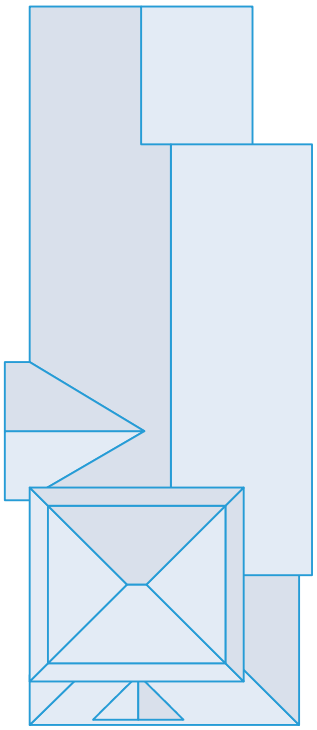

Measurements

Total roof area	6736 sqft
Total pitched area	6736 sqft
Total flat area	0 sqft
Total roof facets	18 facets
Predominant pitch	6/12
Total eaves	395ft 6in
Total valleys	72ft 1in
Total hips	129ft 10in
Total ridges	119ft 5in
Total rakes	134ft 9in
Total wall flashing	71ft 7in
Total step flashing	85ft 8in
Total transitions	113ft 10in
Total parapet wall	0ft 0in
Total unspecified	42ft 6in
Hips + ridges	249ft 4in
Eaves + rakes	530ft 3in

Pitch 6/12

Area (sqft)	6,737
Squares	67.4

		Recommended				
Waste %	0%	8%	10%	12%	15%	17%	20%
Area (sqft)	6,737	7,276	7,410	7,545	7,747	7,882	8,084
Squares	67.4	72.8	74.1	75.5	77.5	78.9	80.9

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

10 South High Street, Covington, OH 45318

Product	Unit	Waste (0%)	Waste (8%)	Waste (10%)	Waste (15%)
Shingle (total sqft)		6,737 sqft	7,276 sqft	7,410 sqft	7,747 sqft
IKO - Cambridge	bundle	203	219	223	233
CertainTeed - Landmark	bundle	206	222	226	237
GAF - Timberline	bundle	206	222	226	237
Owens Corning - Duration	bundle	206	222	226	237
Atlas - Pristine	bundle	205	221	225	235
Starter (eaves + rakes)		531 ft	573 ft	584 ft	610 ft
IKO - Leading Edge Plus	bundle	5	5	5	6
CertainTeed - SwiftStart	bundle	5	5	6	6
GAF - Pro-Start	bundle	5	5	5	6
Owens Corning - Starter Strip	bundle	6	6	6	6
Atlas - Pro-Cut	bundle	4	5	5	5
Ice and Water (eaves + valleys + flashings)		625 ft	675 ft	688 ft	719 ft
IKO - StormShield	roll	10	11	11	12
CertainTeed - WinterGuard	roll	10	11	11	12
GAF - WeatherWatch	roll	10	11	11	11
Owens Corning - WeatherLock	roll	9	9	10	10
Atlas - Weathermaster	roll	10	11	11	12
Synthetic (total sqft; no laps)		6,737 sqft	7,276 sqft	7,410 sqft	7,747 sqft
IKO - Stormtite	roll	7	8	8	8
CertainTeed - RoofRunner	roll	7	8	8	8
GAF - Deck-Armor	roll	7	8	8	8
Owens Corning - RhinoRoof	roll	7	8	8	8
Atlas - Summit	roll	7	8	8	8
Capping (hips + ridges)		250 ft	270 ft	275 ft	287 ft
IKO - Hip and Ridge	bundle	7	7	7	8
CertainTeed - Shadow Ridge	bundle	9	9	10	10
GAF - Seal-A-Ridge	bundle	10	11	11	12
Owens Corning - DecoRidge	bundle	13	14	14	15
Atlas - Pro-Cut H&R	bundle	9	9	9	10
Other					
8' Valley (no laps)	sheet	10	10	10	11
10' Drip Edge (eaves + rakes; no laps)	sheet	54	58	59	61

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.