Roof Report

Prepared by Roofr

363 West Salem Street, Clayton, OH 45315
Sarah Hardin


1980 sqft
17 facets
Predominant pitch 9/12



This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

363 West Salem Street, Clayton, OH 45315

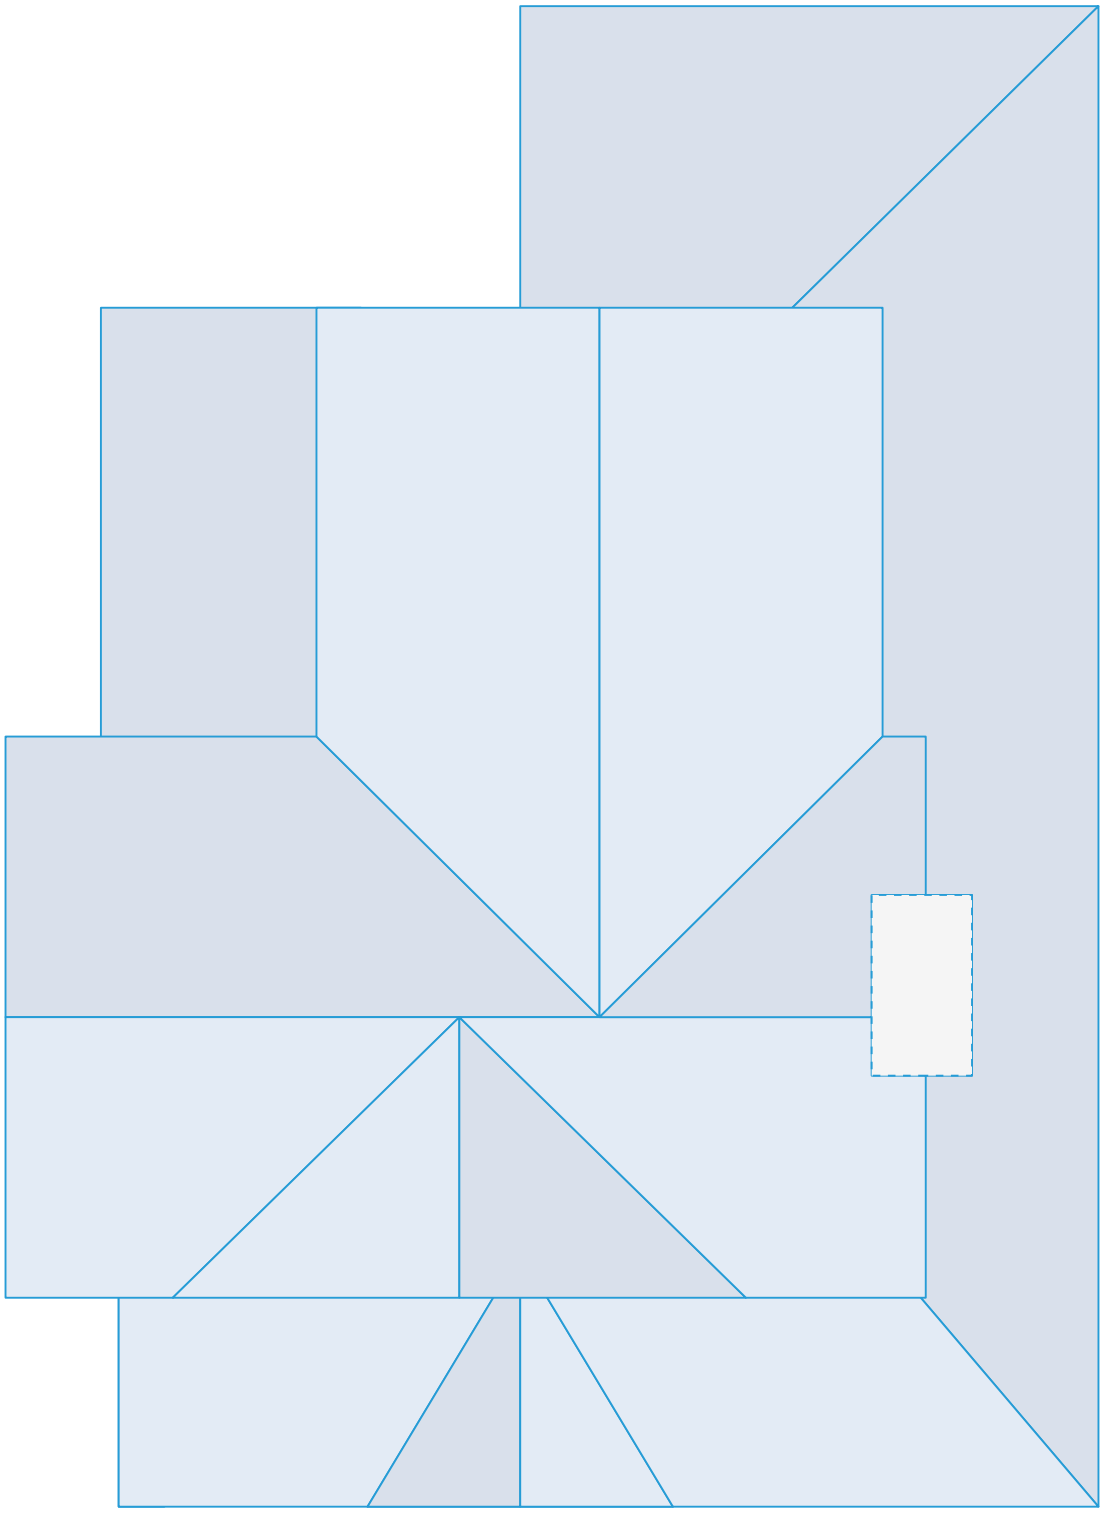


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

363 West Salem Street, Clayton, OH 45315

- Eaves: 175ft 9in
- Ridges: 69ft 5in
- Step flashing: 35ft 5in
- Unspecified: 9ft 0in
- Valleys: 80ft 10in
- Rakes: 129ft 4in
- Transitions: 0ft 0in
- Hips: 29ft 0in
- Wall flashing: 99ft 8in
- Parapet wall: 0ft 0in

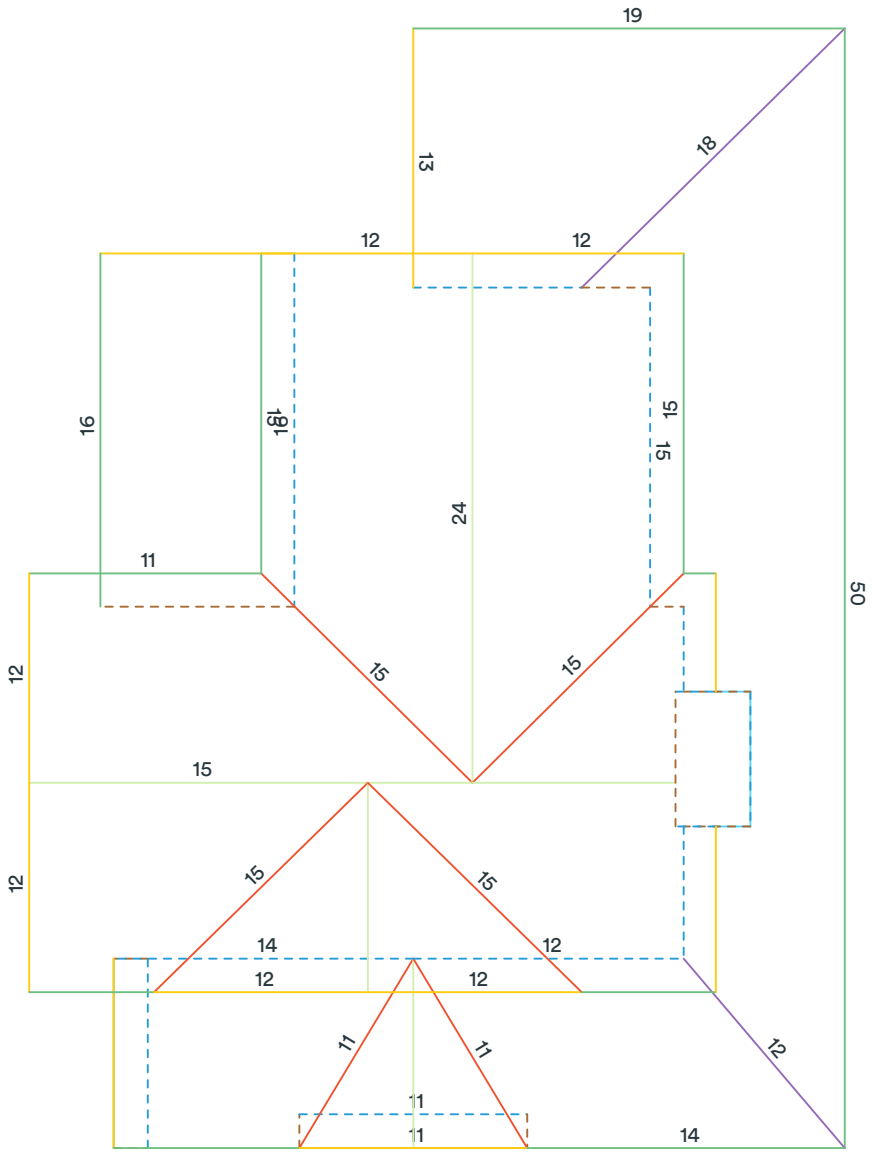

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

363 West Salem Street, Clayton, OH 45315

Total roof area: 1980 sqft
Pitched roof area: 1980 sqft
Flat roof area: 0 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 9/12
Predominant pitch area: 1013 sqft
Unspecified pitch area: 0 sqft

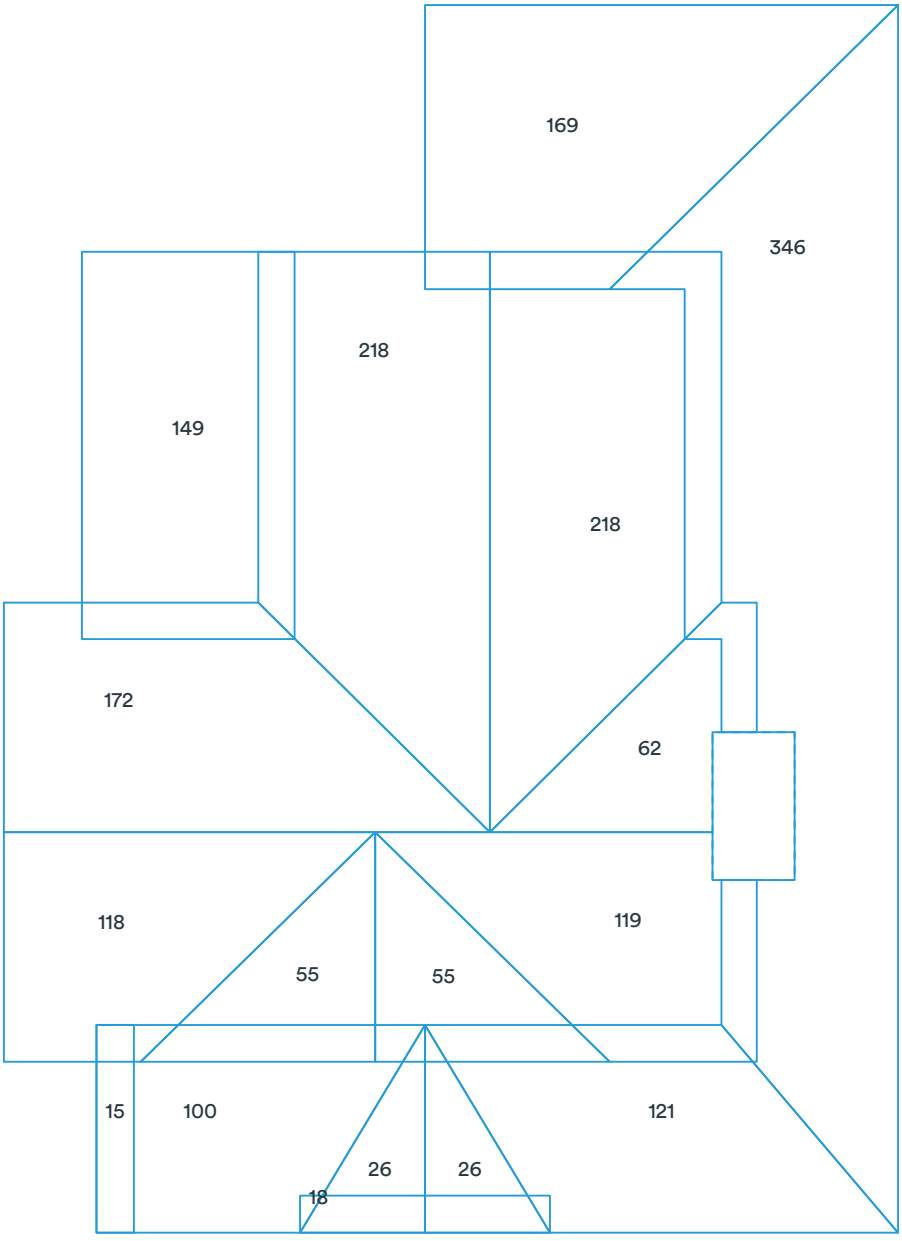


Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

363 West Salem Street, Clayton, OH 45315

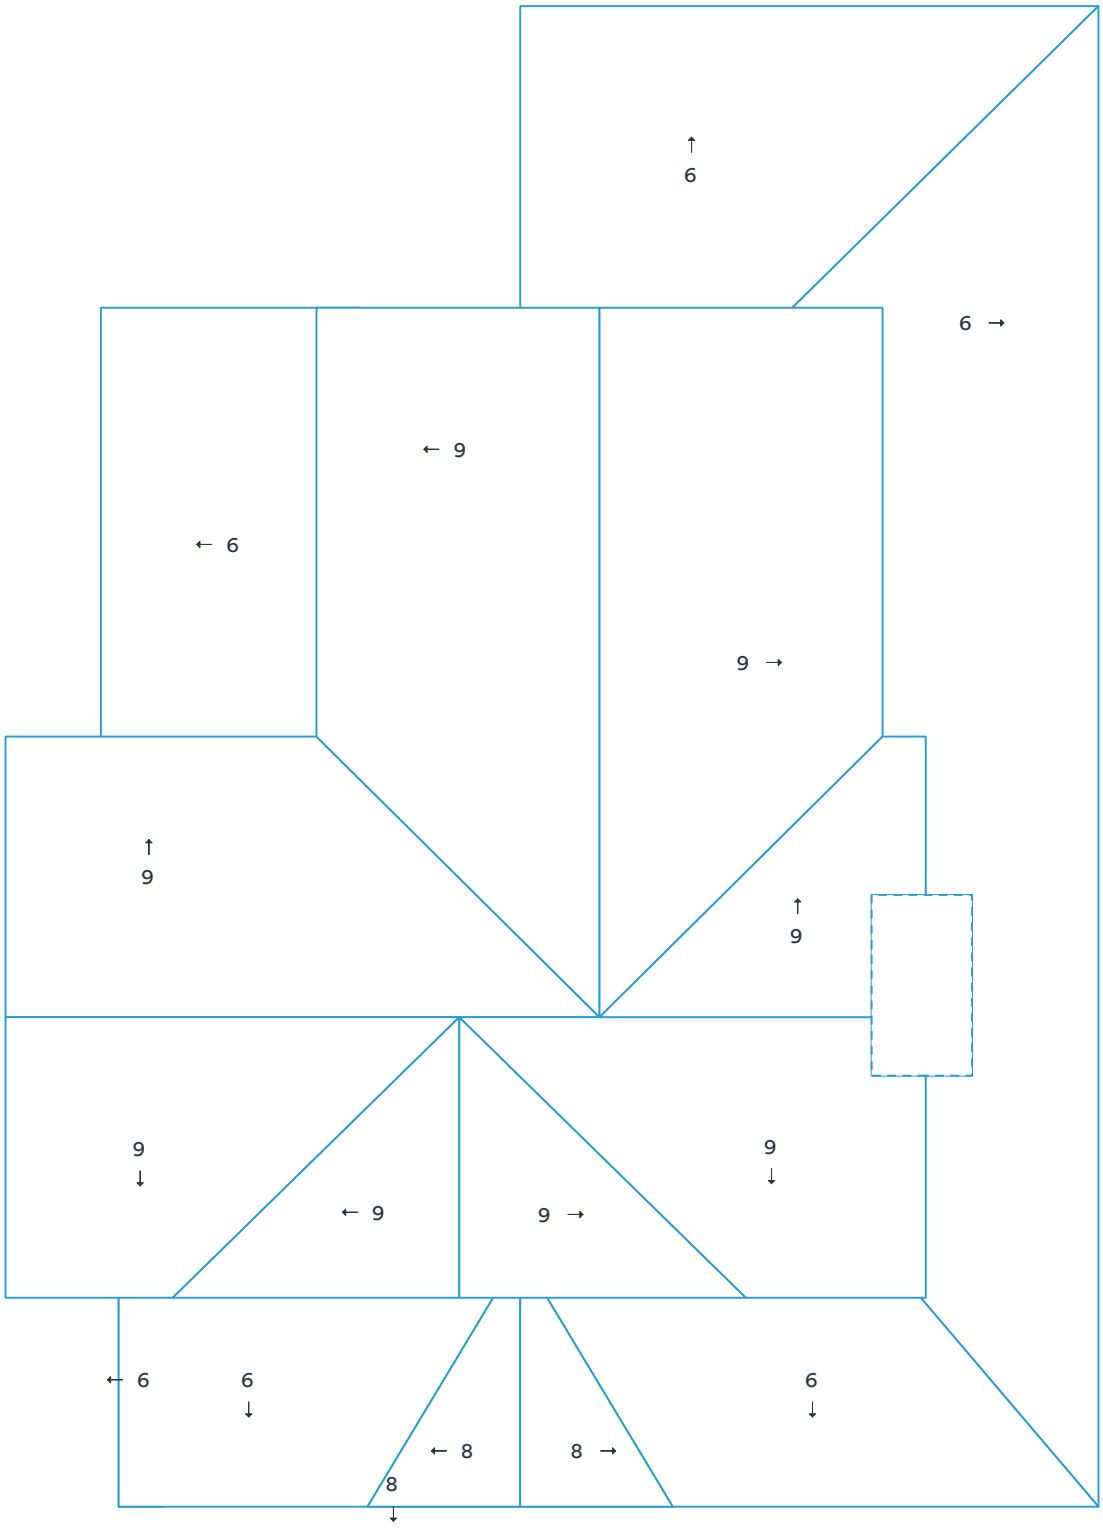


Deleted facets are designated with a dashed line and do not have a pitch.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

363 West Salem Street, Clayton, OH 45315

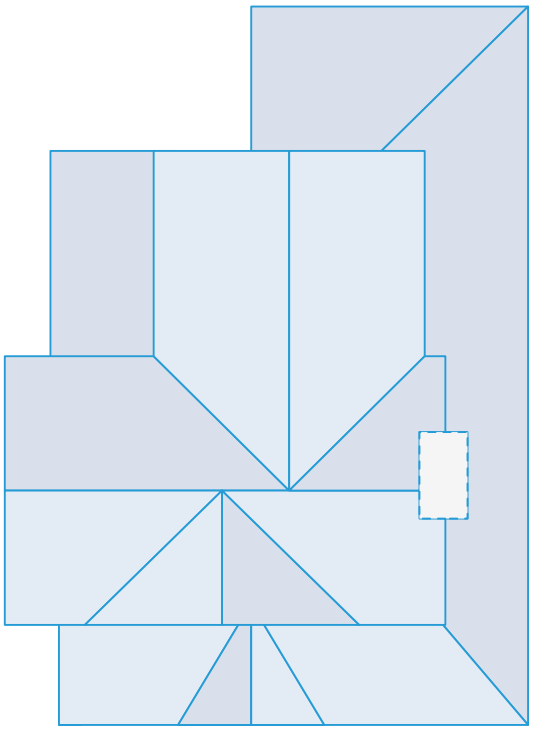

Measurements

Total roof area	1980 sqft
Total pitched area	1980 sqft
Total flat area	0 sqft
Total roof facets	17 facets
Predominant pitch	9/12
Total eaves	175ft 9in
Total valleys	80ft 10in
Total hips	29ft 0in
Total ridges	69ft 5in
Total rakes	129ft 4in
Total wall flashing	99ft 8in
Total step flashing	35ft 5in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	9ft 0in
Hips + ridges	98ft 5in
Eaves + rakes	305ft 1in

Pitch	6/12	8/12	9/12
Area (sqft)	899	69	1,014
Squares	9.0	0.7	10.2

					Recommended		
Waste %	10%	12%	15%	17%	18%	20%	22%
Area (sqft)	2,179	2,218	2,278	2,317	2,337	2,377	2,416
Squares	21.8	22.2	22.8	23.2	23.4	23.8	24.2

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

363 West Salem Street, Clayton, OH 45315

Product	Unit	Waste (10%)	Waste (15%)	Waste (18%)	Waste (20%)
Shingle (total sqft)		2,179 sqft	2,278 sqft	2,337 sqft	2,377 sqft
IKO - Cambridge	bundle	66	69	71	72
CertainTeed - Landmark	bundle	67	70	72	73
GAF - Timberline	bundle	67	70	72	73
Owens Corning - Duration	bundle	67	70	72	73
Atlas - Pristine	bundle	67	70	71	73
Starter (eaves + rakes)		336 ft	351 ft	361 ft	367 ft
IKO - Leading Edge Plus	bundle	3	3	4	4
CertainTeed - SwiftStart	bundle	3	4	4	4
GAF - Pro-Start	bundle	3	3	3	4
Owens Corning - Starter Strip	bundle	4	4	4	4
Atlas - Pro-Cut	bundle	3	3	3	3
Ice and Water (eaves + valleys + flashings)		431 ft	451 ft	463 ft	471 ft
IKO - StormShield	roll	7	7	8	8
CertainTeed - WinterGuard	roll	7	7	8	8
GAF - WeatherWatch	roll	7	7	7	8
Owens Corning - WeatherLock	roll	6	7	7	7
Atlas - Weathermaster	roll	7	7	8	8
Synthetic (total sqft; no laps)		2,179 sqft	2,278 sqft	2,337 sqft	2,377 sqft
IKO - Stormtite	roll	3	3	3	3
CertainTeed - RoofRunner	roll	3	3	3	3
GAF - Deck-Armor	roll	3	3	3	3
Owens Corning - RhinoRoof	roll	3	3	3	3
Atlas - Summit	roll	3	3	3	3
Capping (hips + ridges)		109 ft	114 ft	117 ft	119 ft
IKO - Hip and Ridge	bundle	3	3	3	3
CertainTeed - Shadow Ridge	bundle	4	4	4	4
GAF - Seal-A-Ridge	bundle	5	5	5	5
Owens Corning - DecoRidge	bundle	6	6	6	6
Atlas - Pro-Cut H&R	bundle	4	4	4	4
Other					
8' Valley (no laps)	sheet	12	12	12	13
10' Drip Edge (eaves + rakes; no laps)	sheet	34	36	37	37

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.