Roof Report

Prepared by Rich Roofing & Services LLC

2851 Ohio 235, Saint Paris, OH 43072
Terry Mueller


3373 sqft
17 facets
Predominant pitch 7/12



This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

2851 Ohio 235, Saint Paris, OH 43072

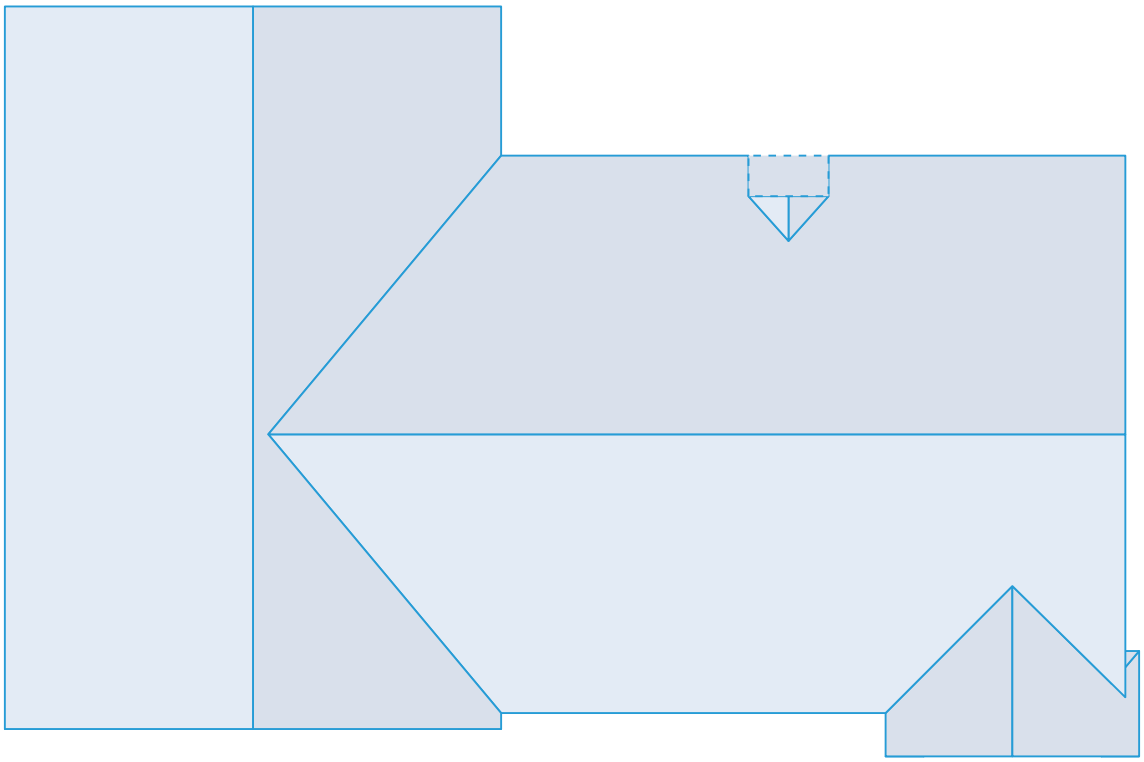


This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

2851 Ohio 235, Saint Paris, OH 43072

- Eaves: 147ft 3in
- Ridges: 114ft 4in
- Step flashing: 28ft 1in
- Unspecified: 20ft 3in
- Valleys: 82ft 3in
- Rakes: 131ft 10in
- Transitions: 0ft 0in
- Hips: 10ft 11in
- Wall flashing: 0ft 0in
- Parapet wall: 0ft 0in

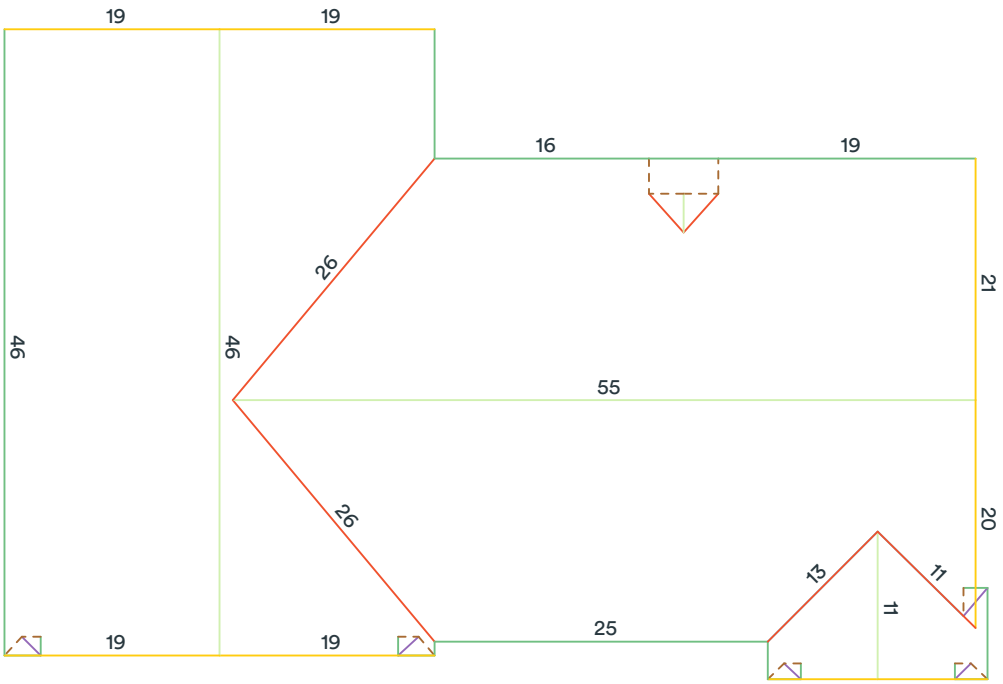

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

2851 Ohio 235, Saint Paris, OH 43072

Total roof area: 3373 sqft
Pitched roof area: 3373 sqft
Flat roof area: 0 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 7/12
Predominant pitch area: 3373 sqft
Unspecified pitch area: 0 sqft

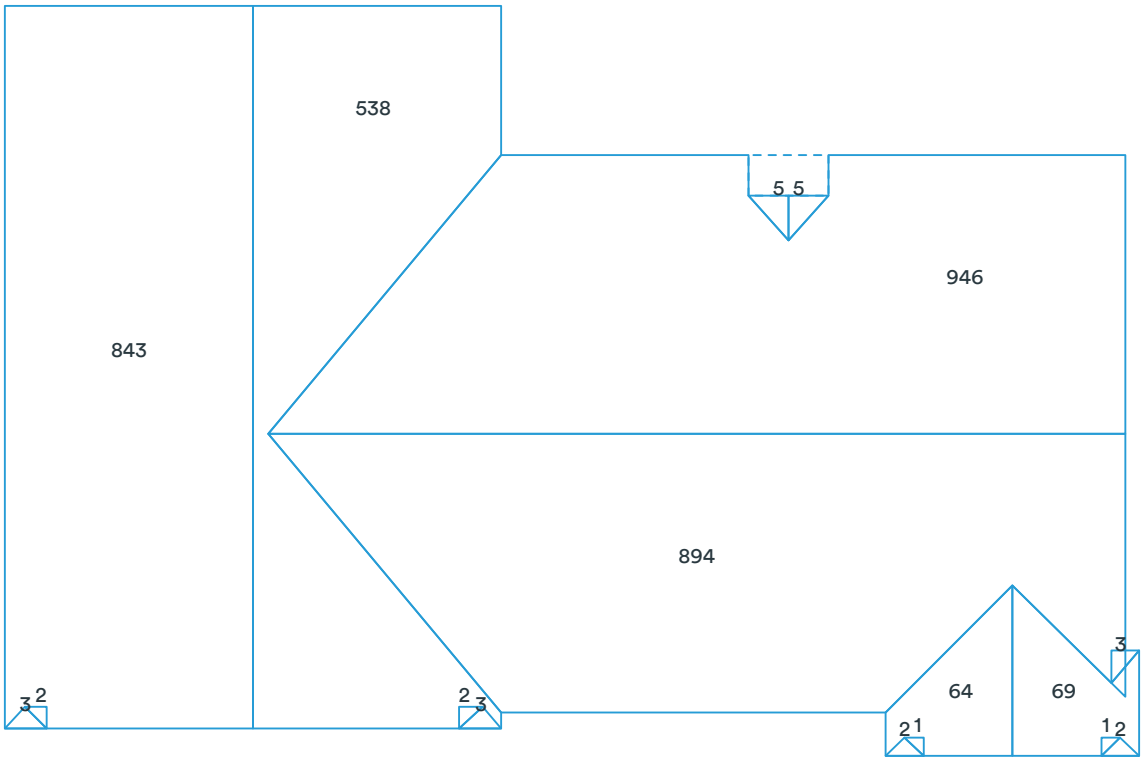


Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

2851 Ohio 235, Saint Paris, OH 43072

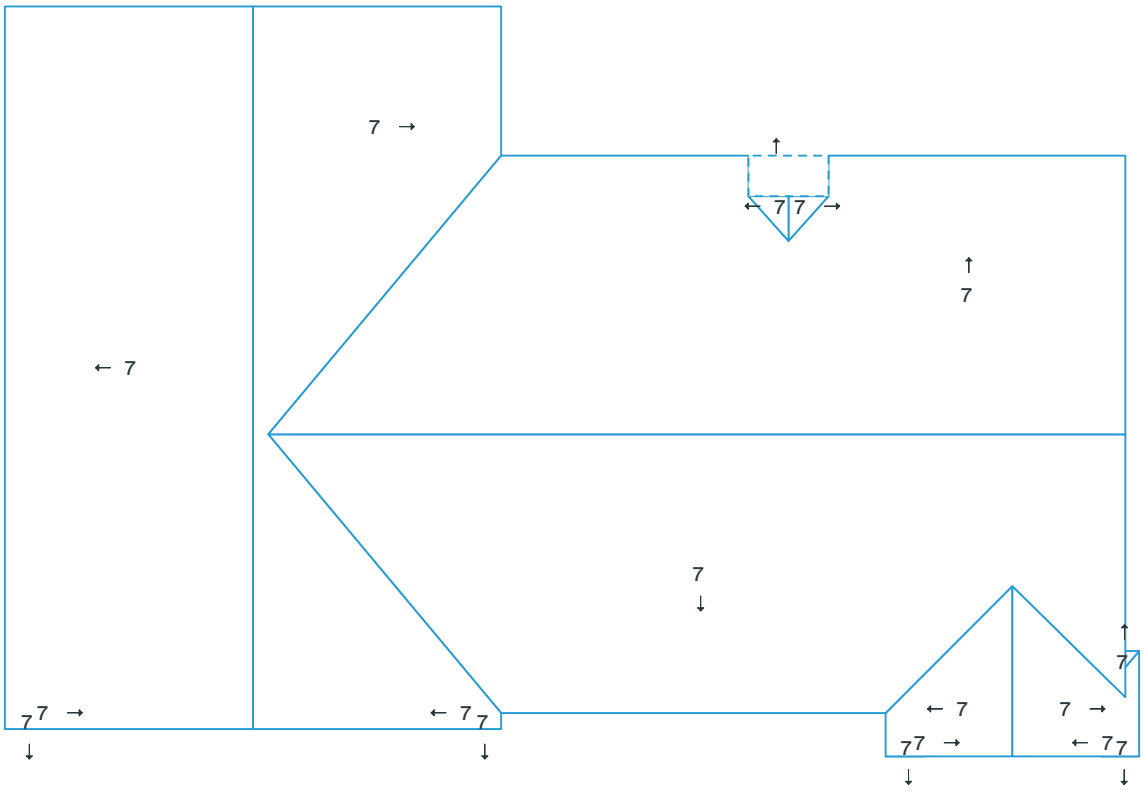


Deleted facets are designated with a dashed line and do not have a pitch.

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

2851 Ohio 235, Saint Paris, OH 43072

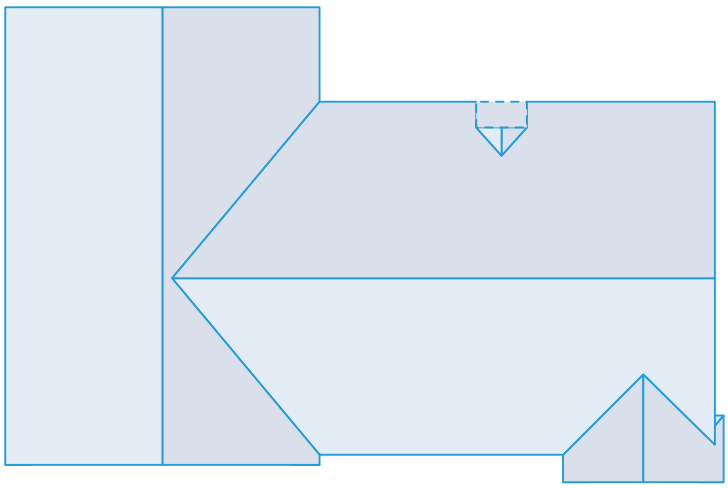

Measurements

Total roof area	3373 sqft
Total pitched area	3373 sqft
Total flat area	0 sqft
Total roof facets	17 facets
Predominant pitch	7/12
Total eaves	147ft 3in
Total valleys	82ft 3in
Total hips	10ft 11in
Total ridges	114ft 4in
Total rakes	131ft 10in
Total wall flashing	0ft 0in
Total step flashing	28ft 1in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	20ft 3in
Hips + ridges	125ft 3in
Eaves + rakes	279ft 1in

Pitch	7/12
Area (sqft)	3,373
Squares	33.8

		Recommended				
Waste %	0%	10%	12%	15%	17%	20%	22%
Area (sqft)	3,373	3,710	3,778	3,879	3,946	4,048	4,115
Squares	33.8	37.1	37.8	38.8	39.5	40.5	41.2

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

2851 Ohio 235, Saint Paris, OH 43072

Product	Unit	Waste (0%)	Waste (10%)	Waste (15%)	Waste (20%)
Shingle (total sqft)		3,373 sqft	3,710 sqft	3,879 sqft	4,048 sqft
IKO - Cambridge	bundle	102	112	117	122
CertainTeed - Landmark	bundle	103	114	119	124
GAF - Timberline	bundle	103	114	119	124
Owens Corning - Duration	bundle	103	114	119	124
Atlas - Pristine	bundle	103	113	118	123
Starter (eaves + rakes)		280 ft	308 ft	321 ft	335 ft
IKO - Leading Edge Plus	bundle	3	3	3	3
CertainTeed - SwiftStart	bundle	3	3	3	3
GAF - Pro-Start	bundle	3	3	3	3
Owens Corning - Starter Strip	bundle	3	3	4	4
Atlas - Pro-Cut	bundle	2	3	3	3
Ice and Water (eaves + valleys + flashings)		258 ft	284 ft	297 ft	310 ft
IKO - StormShield	roll	4	5	5	5
CertainTeed - WinterGuard	roll	4	5	5	5
GAF - WeatherWatch	roll	4	5	5	5
Owens Corning - WeatherLock	roll	4	4	4	5
Atlas - Weathermaster	roll	4	5	5	5
Synthetic (total sqft; no laps)		3,373 sqft	3,710 sqft	3,879 sqft	4,048 sqft
IKO - Stormtite	roll	4	4	4	5
CertainTeed - RoofRunner	roll	4	4	4	5
GAF - Deck-Armor	roll	4	4	4	5
Owens Corning - RhinoRoof	roll	4	4	4	5
Atlas - Summit	roll	4	4	4	5
Capping (hips + ridges)		126 ft	138 ft	145 ft	151 ft
IKO - Hip and Ridge	bundle	4	4	4	4
CertainTeed - Shadow Ridge	bundle	5	5	5	6
GAF - Seal-A-Ridge	bundle	6	6	6	7
Owens Corning - DecoRidge	bundle	7	7	8	8
Atlas - Pro-Cut H&R	bundle	5	5	5	5
Other					
8' Valley (no laps)	sheet	11	12	12	13
10' Drip Edge (eaves + rakes; no laps)	sheet	28	31	33	34

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.