Roof Report

Prepared by Rich Roofing & Services LLC

468 Schnorf-Jones Road, Laura, OH 45337
Michael Pauley
9374691676


3108 sqft
21 facets
Predominant pitch 10/12



This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

468 Schnorf-Jones Road, Laura, OH 45337

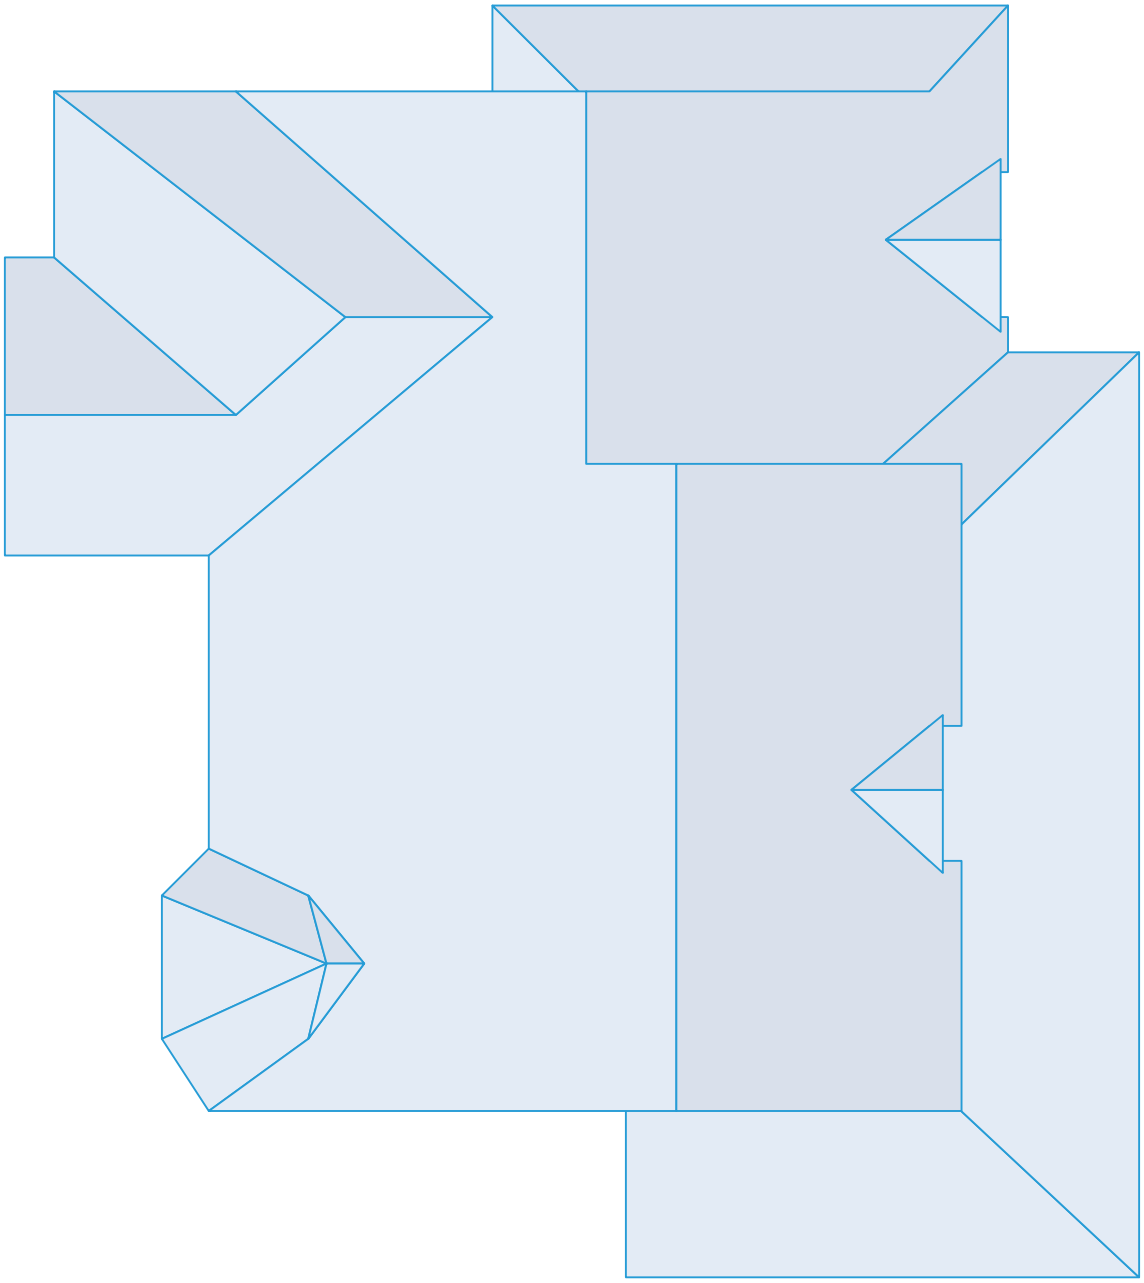


This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

468 Schnorf-Jones Road, Laura, OH 45337

- Eaves: 208ft 2in
- Ridges: 84ft 8in
- Step flashing: 27ft 9in
- Unspecified: 47ft 6in
- Valleys: 106ft 10in
- Rakes: 140ft 2in
- Transitions: 0ft 0in
- Hips: 97ft 8in
- Wall flashing: 62ft 5in
- Parapet wall: 0ft 0in

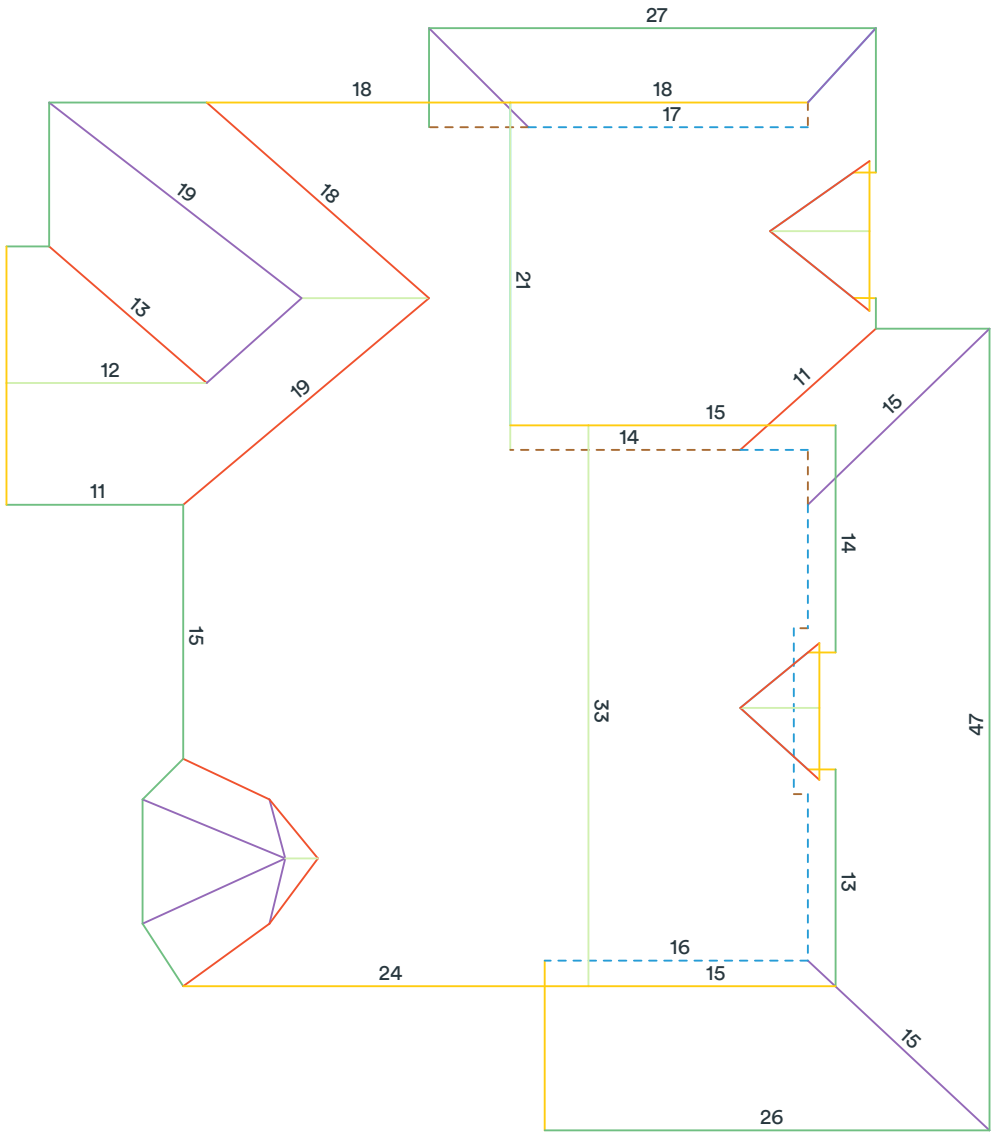

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

468 Schnorf-Jones Road, Laura, OH 45337

Total roof area: 3108 sqft
Pitched roof area: 3108 sqft
Flat roof area: 0 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 10/12
Predominant pitch area: 179 sqft
Unspecified pitch area: 2929 sqft

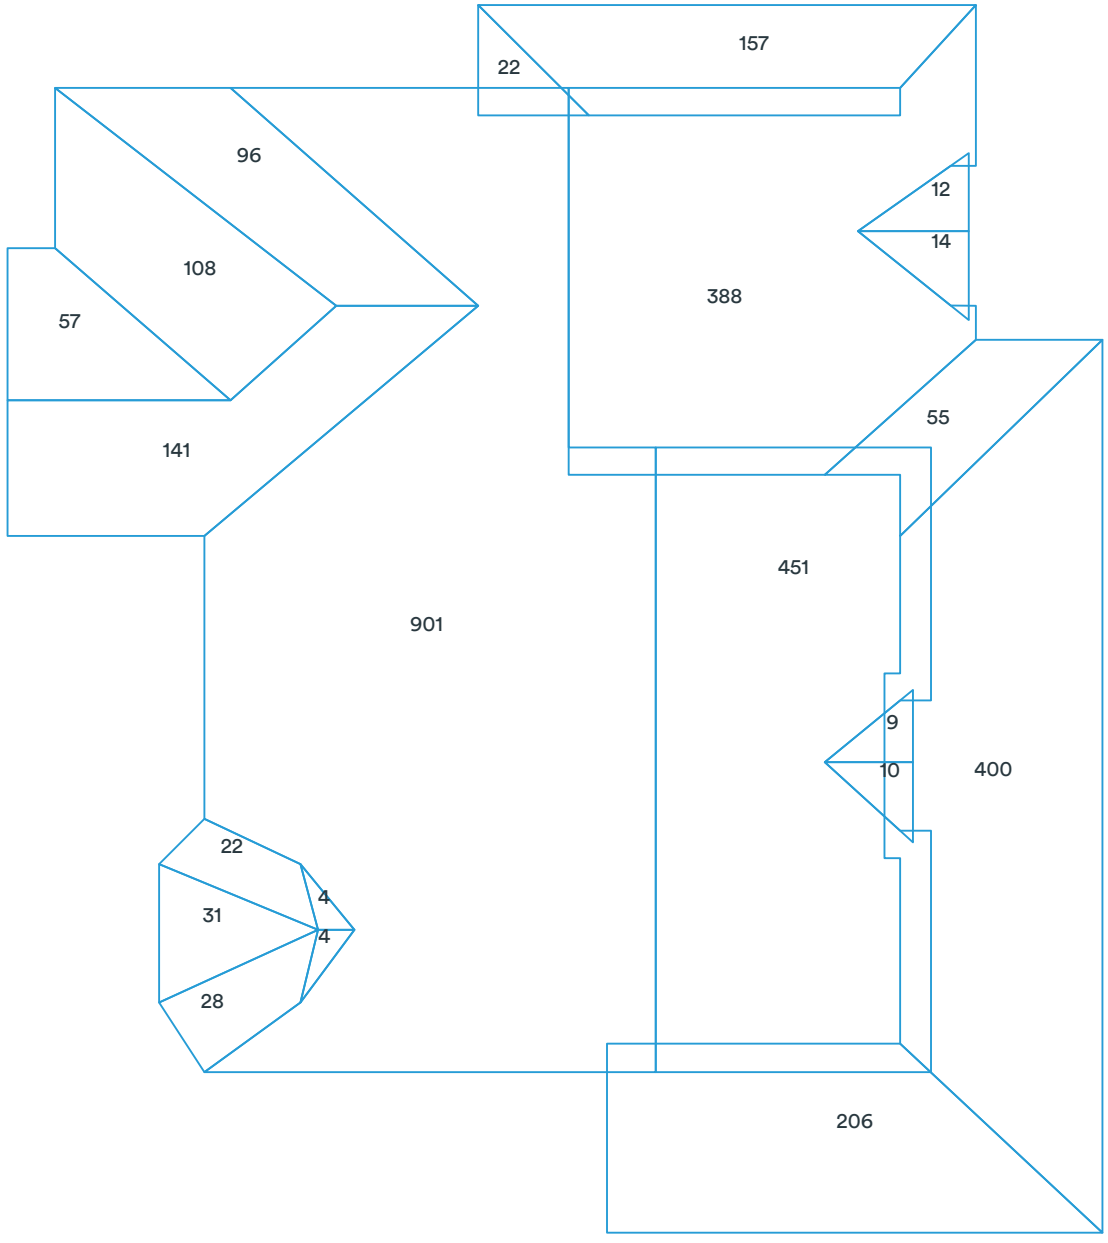


Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

468 Schnorf-Jones Road, Laura, OH 45337

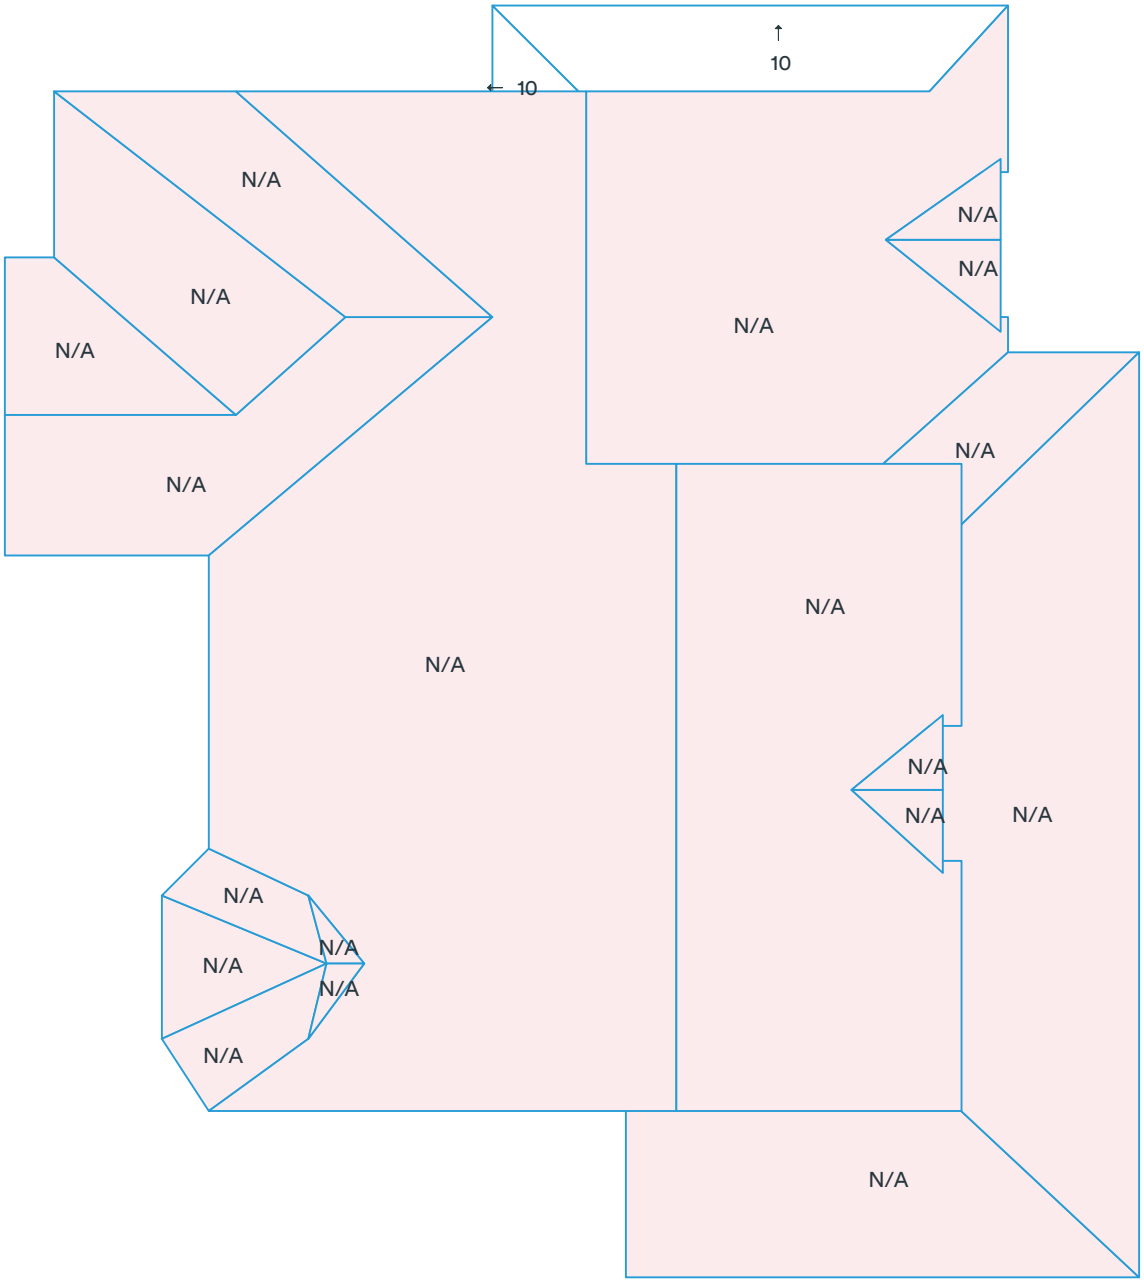


Deleted facets are designated with a dashed line and do not have a pitch.

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

468 Schnorf-Jones Road, Laura, OH 45337

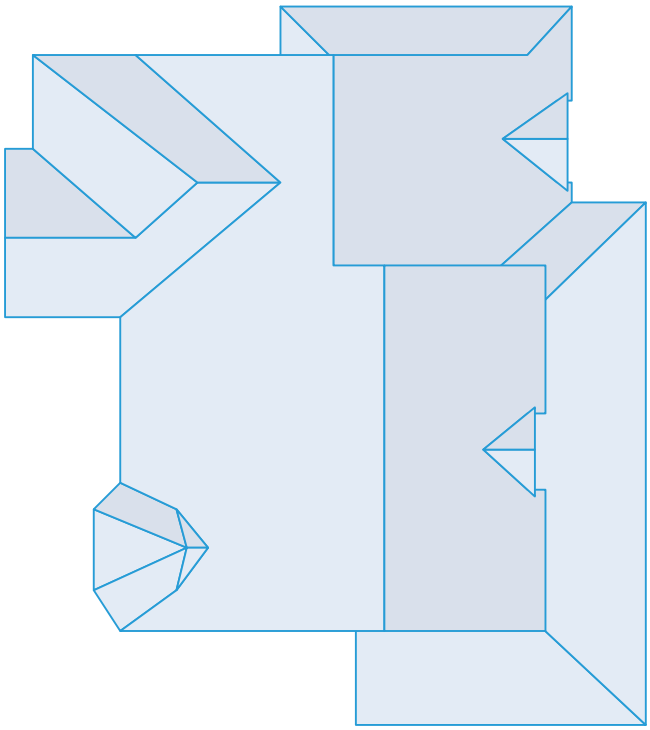

Measurements

Total roof area	3108 sqft
Total pitched area	3108 sqft
Total flat area	0 sqft
Total roof facets	21 facets
Predominant pitch	10/12
Total eaves	208ft 2in
Total valleys	106ft 10in
Total hips	97ft 8in
Total ridges	84ft 8in
Total rakes	140ft 2in
Total wall flashing	62ft 5in
Total step flashing	27ft 9in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	47ft 6in
Hips + ridges	182ft 5in
Eaves + rakes	348ft 4in

Pitch	N/A	10/12
Area (sqft)	2,930	179
Squares	29.3	1.8

				Recommended			
Waste %	10%	12%	15%	16%	17%	20%	22%
Area (sqft)	3,419	3,481	3,575	3,606	3,637	3,730	3,792
Squares	34.2	34.9	35.8	36.1	36.4	37.3	38.0

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

468 Schnorf-Jones Road, Laura, OH 45337

Product	Unit	Waste (10%)	Waste (15%)	Waste (16%)	Waste (20%)
Shingle (total sqft)		3,419 sqft	3,575 sqft	3,606 sqft	3,730 sqft
IKO - Cambridge	bundle	103	108	109	113
CertainTeed - Landmark	bundle	105	109	110	114
GAF - Timberline	bundle	105	109	110	114
Owens Corning - Duration	bundle	105	109	110	114
Atlas - Pristine	bundle	104	109	110	114
Starter (eaves + rakes)		384 ft	401 ft	405 ft	418 ft
IKO - Leading Edge Plus	bundle	4	4	4	4
CertainTeed - SwiftStart	bundle	4	4	4	4
GAF - Pro-Start	bundle	4	4	4	4
Owens Corning - Starter Strip	bundle	4	4	4	4
Atlas - Pro-Cut	bundle	3	3	3	3
Ice and Water (eaves + valleys + flashings)		446 ft	466 ft	470 ft	487 ft
IKO - StormShield	roll	7	8	8	8
CertainTeed - WinterGuard	roll	7	8	8	8
GAF - WeatherWatch	roll	7	7	8	8
Owens Corning - WeatherLock	roll	6	7	7	7
Atlas - Weathermaster	roll	7	8	8	8
Synthetic (total sqft; no laps)		3,419 sqft	3,575 sqft	3,606 sqft	3,730 sqft
IKO - Stormtite	roll	4	4	4	4
CertainTeed - RoofRunner	roll	4	4	4	4
GAF - Deck-Armor	roll	4	4	4	4
Owens Corning - RhinoRoof	roll	4	4	4	4
Atlas - Summit	roll	4	4	4	4
Capping (hips + ridges)		201 ft	210 ft	212 ft	219 ft
IKO - Hip and Ridge	bundle	6	6	6	6
CertainTeed - Shadow Ridge	bundle	7	7	8	8
GAF - Seal-A-Ridge	bundle	9	9	9	9
Owens Corning - DecoRidge	bundle	11	11	11	11
Atlas - Pro-Cut H&R	bundle	7	7	7	8
Other					
8' Valley (no laps)	sheet	15	16	16	17
10' Drip Edge (eaves + rakes; no laps)	sheet	39	41	41	42

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was powered by Roofr. Copyright © 2026 Roofr.com | All rights reserved.