Roof Report

Prepared by Roofr

2603 sqft
13 facets
NO PITCH APPLIED

5950 State Rte 41, Covington, OH 45318, USA
Craig Sisco



This report was prepared by Roofr. Copyright © 2021 Roofr.com | All rights reserved.

Building Location


5950 State Rte 41, Covington, OH 45318, USA



This report was prepared by Roofr. Copyright © 2021 Roofr.com | All rights reserved.

Diagram

5950 State Rte 41, Covington, OH 45318, USA

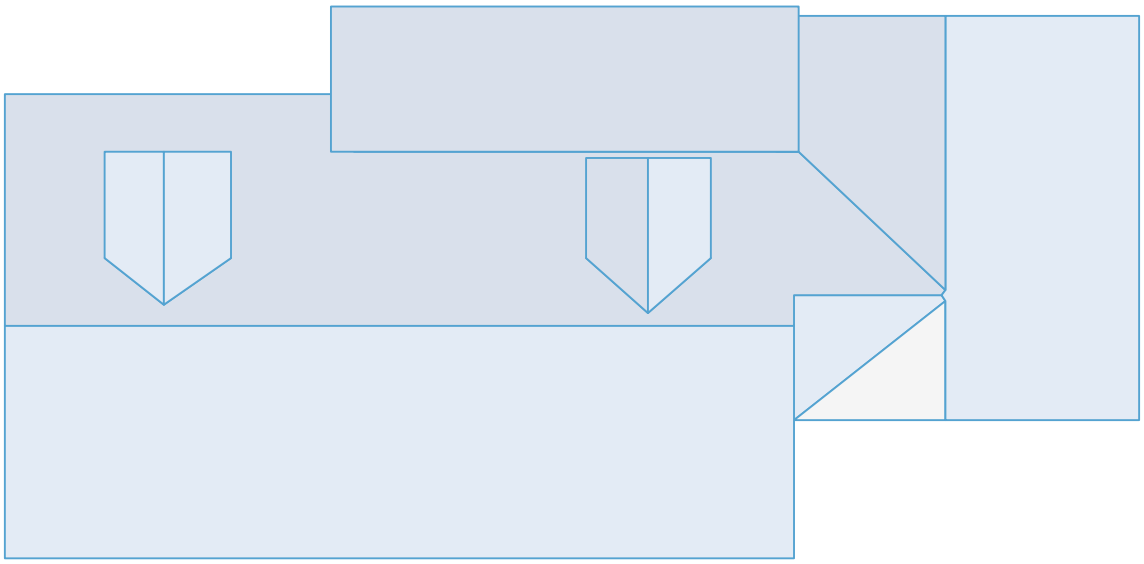


This report was prepared by Roofr. Copyright © 2021 Roofr.com | All rights reserved.

Length Measurement Report

5950 State Rte 41, Covington, OH 45318, USA

- Eaves 161ft 4in
- Ridges 110ft 6in
- Step Flashing 33ft 8in
- Valleys 47ft 9in
- Rakes 133ft 8in
- Transitions 31ft 2in
- Hips 0ft 11in
- Wall Flashing 27ft 3in
- Unspecified 147ft 1in

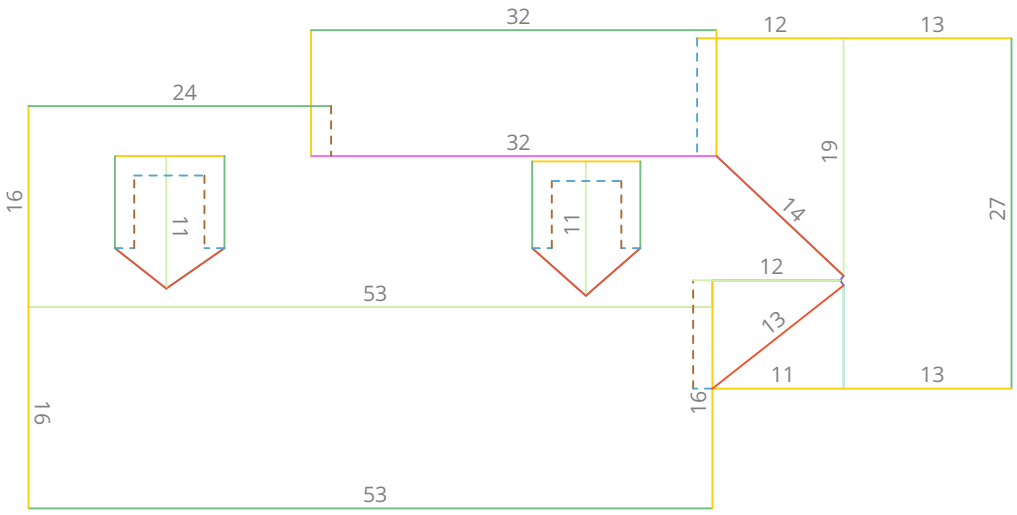

Note: The above diagram contains measurements that have been rounded up. 6 and 9 are written •6 and •9 to avoid confusion. Some edge length totals have been hidden from the diagram to avoid overcrowding. Flashings are depicted as dotted lines.


This report was prepared by Roofr. Copyright © 2021 Roofr.com | All rights reserved.

Area Measurement Report

5950 State Rte 41, Covington, OH 45318, USA

Total Low Pitch: 0 sqft
Total Two Story: 0 sqft
Total Two Layer: 0 sqft

Predominant Pitch: NO PITCH
Predominant Pitch Area: 0 sqft
Total Area: 2603 sqft

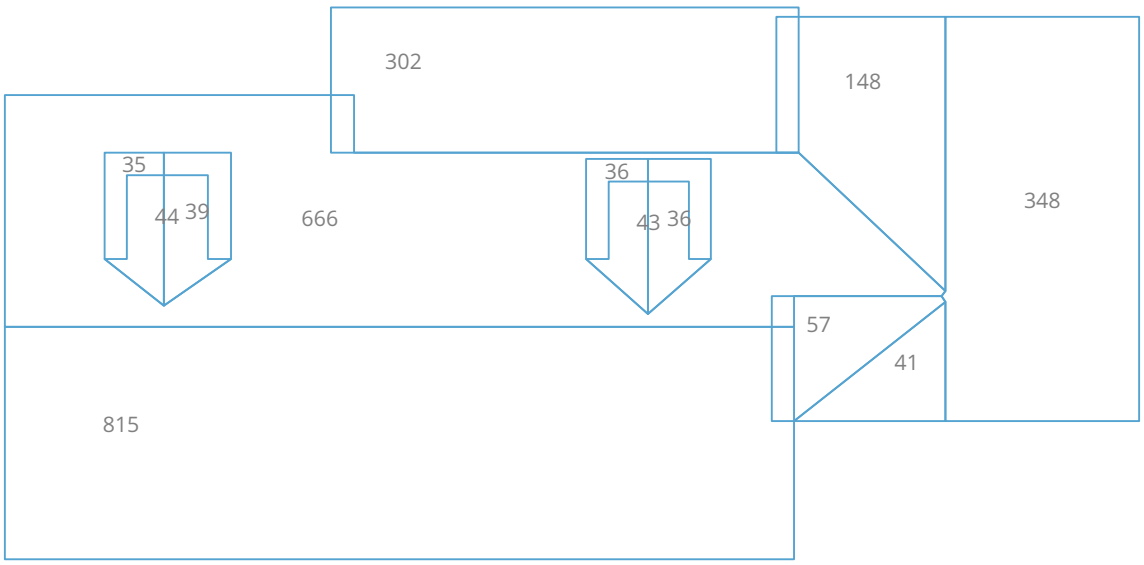


Note: The above diagram contains measurements rounded to the nearest whole number. The total at the top of the page is the sum of all the unrounded (exact) measurements, which is then rounded. Flashings are depicted as dotted lines. Deleted facets, which are not labeled with area, (Skylights, Chimneys, AC units) are omitted from area sums.

This report was prepared by Roofr. Copyright © 2021 Roofr.com | All rights reserved.

Pitch & Direction Measurement Report

5950 State Rte 41, Covington, OH 45318, USA

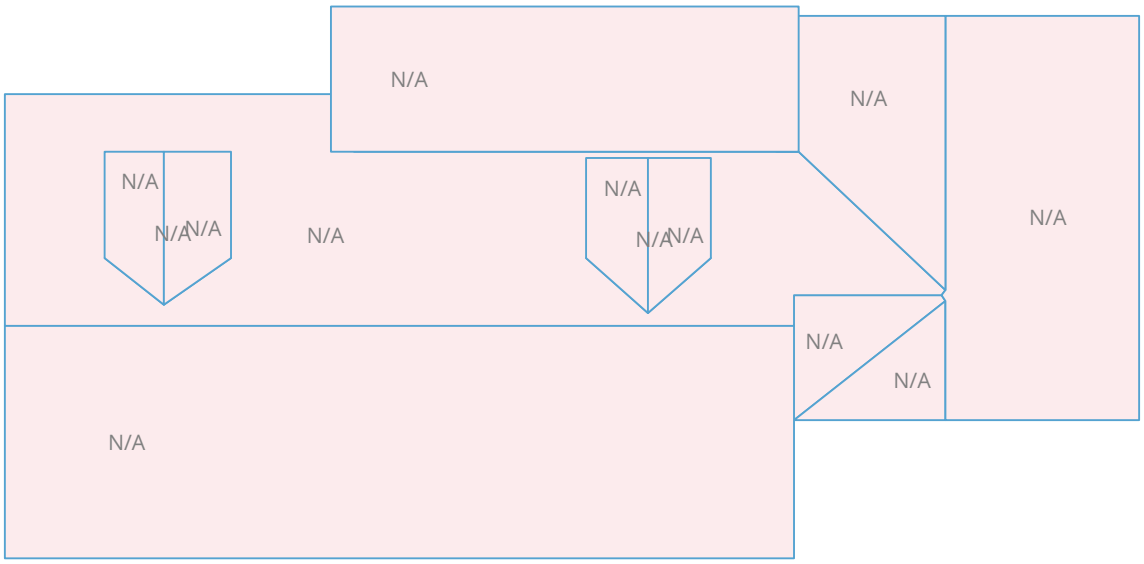


Note: Flashings are depicted as dotted lines. Deleted facets do not have a pitch and therefore are not labeled.

This report was prepared by Roofr. Copyright © 2021 Roofr.com | All rights reserved.

All Structures Summary

5950 State Rte 41, Covington, OH 45318, USA

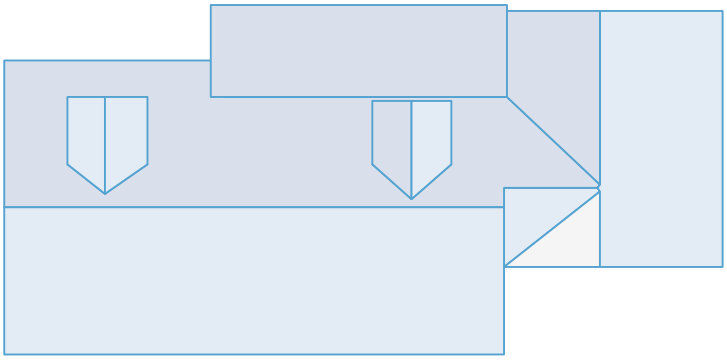

Measurements	
Total Roof Area	2603 sqft
Total Roof Facets	13 facets
Predominant Pitch	NO PITCH
Total Eaves	161ft 4in
Total Valleys	47ft 9in
Total Hips	0ft 11in
Total Ridges	110ft 6in
Total Rakes	131ft 7in
Total Wall Flashing	27ft 3in
Total Step Flashing	33ft 8in
Total Transition	31ft 2in
Total Unspecified	137ft 3in
Hips + Ridges	111ft 5in
Eaves + Rakes	292ft 11in

Pitch	N/A
Area (sqft)	2,603
Squares	26.1

Waste %	0%	10%	12%	15%	17%	20%	22%
Area (sqft)	2,603	2,864	2,916	2,994	3,046	3,124	3,176
Squares	26.1	28.7	29.2	30.0	30.5	31.3	31.8

We've calculated the waste percentages you might expect for this job. A number of factors are involved in determining which waste percentage to use including: how complex the roof is, and your roof application style. These numbers only include the roof area. You will also need to calculate the quantity of materials you will need for hips, valleys, ridges, and starter lengths.

This report was prepared by Roofr. Copyright © 2021 Roofr.com | All rights reserved.